



Busbar terminal block 4 mm²

Item No.: 812-103



Busbar terminal block 4 mm²

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	812-103
GTIN / EAN	4044918253284
Content	1
Order amount	10
Customer item number	

Notes

Safety information 1: Current carrying capacity: With a maximum total current of 96 A, the clamping units of the busbar terminal block can be loaded with the rated current of the approved conductor cross-sections. This only applies when 10 x 3 mm busbars are used.


Technical data

Miscellaneous

Packaging type	BOX
Rated voltage (III / 3) [V]	1000 [V]
Rated impulse voltage (III / 3) [kV]	6 [kV]
Rated current [A]	96 [A]

Technical data	
<i>Legend (ratings)</i>	<i>(III / 3) Overvoltage category III / Pollution degree 3</i>
<i>Type of wiring</i>	<i>Front-entry wiring</i>
<i>No. of poles</i>	<i>12</i>
<i>Total number of connection points</i>	<i>12</i>
<i>Total number of potentials</i>	<i>12</i>
<i>Number of levels</i>	<i>1</i>
<i>Connection technology</i>	<i>Push-in CAGE CLAMP®</i>
<i>Number of connection points (connection type)</i>	<i>1</i>
<i>Actuation type</i>	<i>Operating tool</i>
<i>Connectable conductor materials</i>	<i>Copper</i>
<i>Solid conductor</i>	<i>0.5 ... 4 mm² / 20 ... 12 AWG</i>
<i>Solid conductor, push-in termination</i>	<i>0.5 ... 4 mm² / 20 ... 12 AWG</i>
<i>Stranded conductor</i>	<i>0.5 ... 4 mm² / 20 ... 12 AWG</i>
<i>Fine-stranded conductor</i>	<i>0.5 ... 4 mm² / 20 ... 12 AWG</i>
<i>Strip length</i>	<i>11 mm / 0.43 Inch</i>
<i>Width</i>	<i>75 mm / 2.953 Inch</i>
<i>Height</i>	<i>30 mm / 1.181 Inch</i>
<i>Depth</i>	<i>27.5 mm / 1.083 Inch</i>
<i>Color</i>	<i>red</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Fire load [MJ]</i>	<i>0.823 [MJ]</i>
<i>Weight [g]</i>	<i>35.708 [g]</i>

Images & drawings

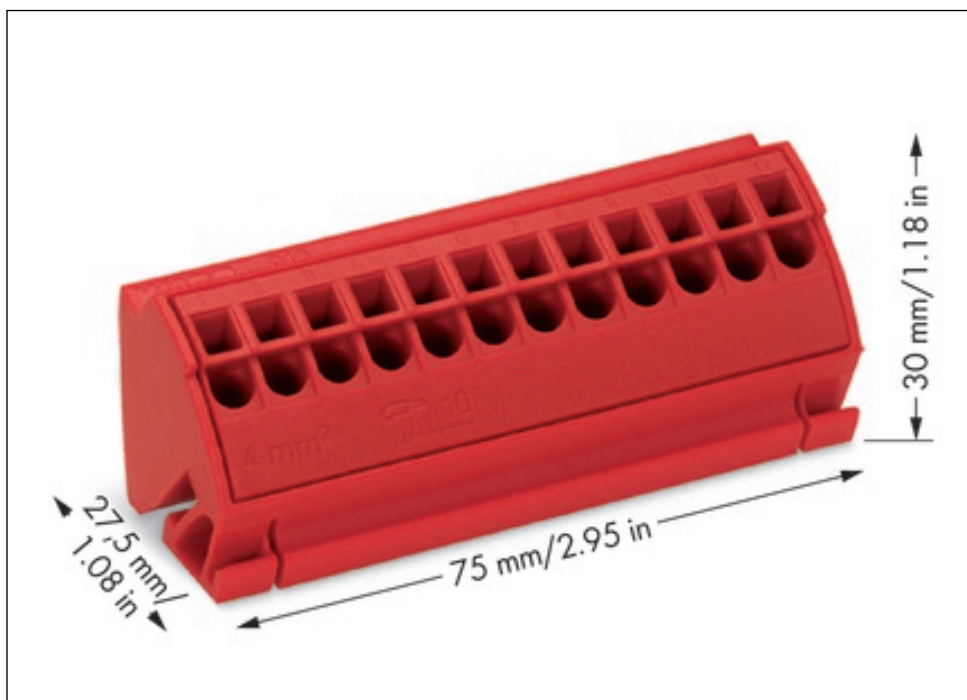

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.