

N Male Right Angle Crimp




Specifications

Impedance	: 50Ω
Frequency Range	: 0-11 GHz
V _{swr}	: 1.5 Max. @ 9 GHz
Insertion Loss	: 0.06 dB Max. × √fGHz
Working Voltage	: 1k Vrms @ Sea Level
Temperature Range	: -65°C To +85°C
Insulation Resistance	: 5kMΩ Min.

For RG-58, 58A, 58C, 141, 141A, Belden 8240, 9907
8259, 8262, 9201, 9203, 9310, 9311 & Comm/Scope 0268

Diagram

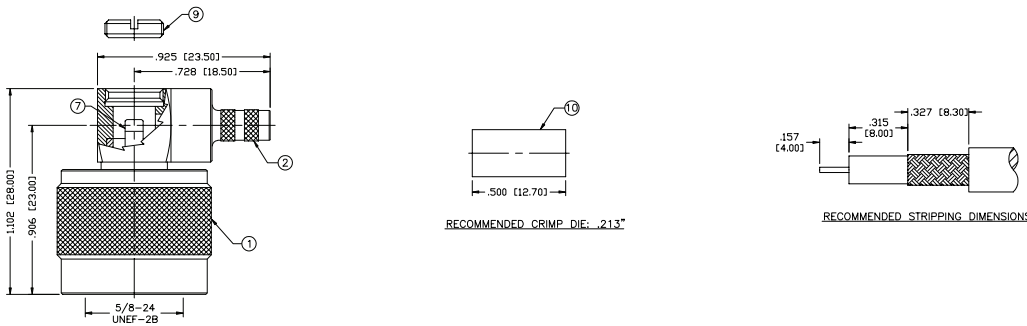

Dimensions : Inches (Millimetres)

No.	Description	Material	Finish	Qty
1	Shell	Brass	Nickel, 100μ"	1
2	Body	Brass	Nickel, 100μ"	
3	Insulator	PTFE	-	
4	Grounding Ring	Brass	Nickel, 100μ"	
5	Gasket	Silicone	-	
6	Retaining Ring	SST	-	
7	Pin	Brass	Gold, 3μ"	
8	Ferrule Stud	Brass	Nickel, 100μ"	
9	Screw Cap	Brass	Nickel, 100μ"	
10	Ferrule	Brass	Nickel, 100μ"	

Note: Attach Cable to connector by soldering the cable inner conductor to the pin slot inside the connector

Part Number Table

Description	Part Number
N, Male R/A Crimp, Square Body, N,G,T; for RG-58/U, CBL GRP C	MC002033

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.

www.element14.com
www.farnell.com
www.newark.com