



### Main

Range of product	Preventa Safety automation
Product or component type	Preventa safety module
Safety module name	XPSAV
Safety module application	For emergency stop and switch monitoring
Function of module	Emergency stop monitoring 2-channel wiring Monitoring of a movable guard associated with 2 switches automatic start Emergency stop button with 1 NC contact, automatic start or unmonitored start Emergency stop button with 2 NC contacts, monitored start Emergency stop monitoring 1-channel wiring
Safety level	Can reach PL e/category 4 conforming to EN/ISO 13849-1 Can reach SILCL 3 conforming to EN/IEC 62061
Safety reliability data	DC > 99 % conforming to EN/ISO 13849-1 MTTFd = 75.8 years conforming to EN/ISO 13849-1 PFHd = 7.95E-9 1/h conforming to EN/IEC 62061
Type of start	Configurable
Connections - terminals	Captive screw clamp terminals, clamping capacity: 2 x 0.5...2 x 1.5 mm <sup>2</sup> flexible cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 1 x 0.14...1 x 2.5 mm <sup>2</sup> flexible cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 1 x 0.14...1 x 2.5 mm <sup>2</sup> solid cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 1 x 0.25...1 x 1.5 mm <sup>2</sup> flexible cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 1 x 0.25...1 x 2.5 mm <sup>2</sup> flexible cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 2 x 0.14...2 x 0.75 mm <sup>2</sup> flexible cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 2 x 0.14...2 x 0.75 mm <sup>2</sup> solid cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 2 x 0.25...2 x 1 mm <sup>2</sup> flexible cable with cable end, with double bezel
Output type	Relay instantaneous opening 3 NO, volt-free Relay time delay opening 3 NO, volt-free
Number of additional circuits	3 solid state outputs
[Us] rated supply voltage	24 V DC (- 20...20 %)

### Complementary

Synchronisation time between inputs	1.5 s for guard
-------------------------------------	-----------------

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

	Unlimited for emergency stop
Power consumption in W	<= 5 W DC
Input protection type	Internal, electronic
Time delay range	0...300 s
[Uc] control circuit voltage	24 V DC
Line resistance	100 Ohm 2000 m
Breaking capacity	C300 : 180 VA, AC-15 (holding) for relay output C300 : 1800 VA, AC-15 (inrush) for relay output
Breaking capacity	20 mA at 24 V 1.25 A at 24 V (DC-13) time constant: 50 ms for relay output
Output thermal current	2 A for 1 output and 4 A for the other 2 outputs for instantaneous and time delay outputs 3.3 A for all 3 outputs for instantaneous and time delay outputs 6 A for 1 output and 2 A for the other 2 outputs for instantaneous and time delay outputs
[Ith] conventional free air thermal current	20 A
Associated fuse rating	4 A fuse type gG or gL for instantaneous and time delay outputs conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200 6 A fuse type fast blow conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200
Minimum output current	10 mA for relay output
Minimum output voltage	17 V for relay output
Response time on input open	<= 30 ms
[Ui] rated insulation voltage	300 V (degree of pollution: 2) conforming to DIN VDE 0110 part 1 300 V (degree of pollution: 2) conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV overvoltage category III conforming to IEC 60947-5-1 4 kV overvoltage category III conforming to DIN VDE 0110 part 1
Local signalling	11 LEDs
Mounting support	35 mm symmetrical DIN rail
Product weight	0.32 kg


## Environment

Standards	EN 1088/ISO 14119 EN/ISO 13850 EN/IEC 60947-5-1 EN/IEC 60204-1
Product certifications	TÜV UL CSA
IP degree of protection	IP20 (terminals) conforming to EN/IEC 60529 IP40 (enclosure) conforming to EN/IEC 60529
Ambient air temperature for operation	-10...55 °C
Ambient air temperature for storage	-25...85 °C

## Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

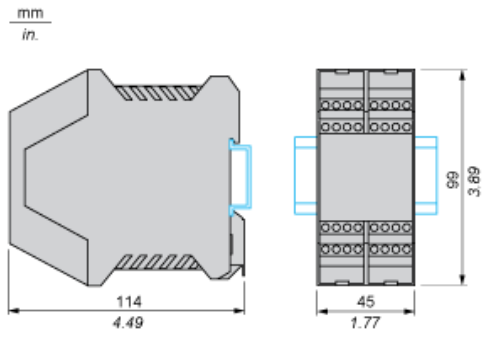

## Wiring Diagrams

### Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:

**XPSAC5121**  
module XPSAC - Emergency stop - 24 V AC DC  
[Download XPSAC5121 product datasheet](#)

Download & Documents 1 to 3 of 3 (Total: -1)

**Instruction sheet**

XPSAC... Safety module for emergency stop and switch monitoring	English 2012-07-04	pdf (29)
---	--------------------	----------

**Image of product**

Emergency stop and switch monitoring	2010-11-10	(Select :)
--------------------------------------	------------	------------

**Certificate**

Russian certificate	English 2010-07-07	pdf (60)
---------------------	--------------------	----------

1 Click on Download & Documents.

2 Click on Instruction sheet.

- 1 Click on Download & Documents.
- 2 Click on Instruction sheet.