


# Pan/Tilt Controller

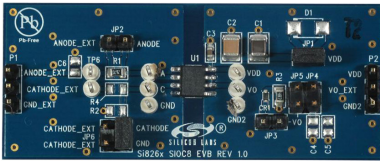


## Multifunction control


### Main function

It can control the versatile Pan/Tilt and horizontal Pan/Tilt outdoor and indoor.

1. Auto
2. Common
3. Up
4. Down
5. Left 6. Right



1. Auto
2. Common
3. Left
4. Right



Type	Function Output			Specification
	Versatile pan/tilt	Horizontal pan/tilt	Instruction	
3002C	1		Control 24V pan/tilt	148×210×55
3006C		1		
3005	5			252×210×55
3007		5		

## Pan/Tilt and Camera Control

Pan/tilt control can select panning direction when manual mode was presented.


And it also can control lens speed, focus(near/far), zoom (wide/tele) and Iris (open/close), and measure the voltage of camera.

## Specifications

- Power Supply : AC 110V/60Hz  
 Pan Control Voltage : ~ (24V)  
 Camera Control Voltage : 6 — 1V


### A: Lens connection

1. Public
2. Iris
3. Zoom
4. Focus




### B: Pan/Tilt connection

1. Auto
2. Public
3. Up
4. Down
5. Left
6. Right



### C: Rainy brush connection

1. No connection
2. No connection
3. Accessorial switch
4. Accessorial switch



## Part Number Table

Description	Part Number
Controller, Pan Tilt Mounts, Auto and Manual Scanning, 24 V AC	82-12445

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Defender security is the registered trademark of the Group. © Premier Farnell Limited 2016.

