www.vishay.com

Vishay Siliconix

Automotive P-Channel 40 V (D-S) 175 °C MOSFET

PowerPAK® 1212-8W Single D D 8 D B 8 Top View Bottom View

Marking code: Q033

PRODUCT SUMMARY				
V _{DS} (V)	-40			
$R_{DS(on)}(\Omega)$ at $V_{GS} = -10 \text{ V}$	0.0161			
$R_{DS(on)}(\Omega)$ at $V_{GS} = -4.5 \text{ V}$	0.0230			
I _D (A)	-16			
Configuration	Single			
Package	PowerPAK 1212-8W			


FEATURES

- TrenchFET® power MOSFET
- AEC-Q101 qualified ^d
- 100 % Rq and UIS tested
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912





ROHS COMPLIANT HALOGEN FREE



P-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS	(T _C = 25 °C, unles	ss otherwise noted			
PARAMETER		SYMBOL	LIMIT	UNIT	
Drain-source voltage		V _{DS}	-40	V	
Gate-source voltage		V _{GS}	± 20	V	
Continuous drain current ^a	T _C = 25 °C		-16		
Continuous drain current 4	T _C = 125 °C	l _D	-16		
Continuous source current (diode conduction) ^a		I _S	-16	Α	
Pulsed drain current ^b		I _{DM}	-64		
Single pulse avalanche current	L = 0.1 mH	I _{AS}	-25		
Single pulse avalanche energy	L = 0.1 IIII	E _{AS}	31.2	mJ	
Maximum power dissipation ^b	T _C = 25 °C	В	62.5	W	
maximum power dissipation ²	T _C = 125 °C	P _D	20	VV	
Operating junction and storage temperature range		T _J , T _{stg}	-55 to +175	°C	
Soldering recommendations (peak temperature) e, f			260		

THERMAL RESISTANCE RATINGS				
PARAMETER		SYMBOL	LIMIT	UNIT
Junction-to-ambient	PCB mount ^c	R _{thJA}	81	°C/W
Junction-to-case (drain)		R_{thJC}	2.4	C/VV

Notes

- a. Package limited
- b. Pulse test; pulse width \leq 300 μ s, duty cycle \leq 2 %
- c. When mounted on 1" square PCB (FR4 material)
- d. Parametric verification ongoing
- e. See solder profile (www.vishay.com/doc?73257). The PowerPAK 1212-8W is a leadless package. The end of the lead terminal is exposed copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper tip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection
- f. Rework conditions: manual soldering with a soldering iron is not recommended for leadless components



www.vishay.com

Vishay Siliconix

PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Static							
Drain-source breakdown voltage	V _{DS}	V _{GS} =	= 0 V, I _D = -250 μA	-40	-	-	V
Gate-source threshold voltage	V _{GS(th)}	V _{DS} =	V _{GS} , I _D = -250 μA	-1.5	-2.0	-2.5	V
Gate-source leakage	I _{GSS}	V _{DS} =	0 V, V _{GS} = ± 20 V	-	-	± 100	nA
		$V_{GS} = 0 V$	V _{DS} = -40 V	=.	-	-1	
Zero gate voltage drain current	I _{DSS}	V _{GS} = 0 V	V _{DS} = -40 V, T _J = 125 °C	=.	-	-50	μΑ
		V _{GS} = 0 V	V _{DS} = -40 V, T _J = 175 °C	-	-	-150	
On-state drain current a	I _{D(on)}	V _{GS} = -10 V	$V_{DS} \le -5 \text{ V}$	-20	-	-	Α
		V _{GS} = -10 V	I _D = -12 A	-	0.0130	0.0161	
Drain aguras en atata registanas h	_B	V _{GS} = -10 V	I _D = -12 A, T _J = 125 °C	-	-	0.0240	
Drain-source on-state resistance b	R _{DS(on)}	V _{GS} = -10 V	I _D = -12 A, T _J = 175 °C	=.	-	0.0270	Ω
		V _{GS} = -4.5 V	I _D = -9 A	-	0.0177	0.0230	
Forward transconductance b	9 _{fs}	V _{DS}	= -15 V, I _D = -7 A	-	30	-	S
Dynamic ^b							
Input capacitance	C _{iss}			-	3710	4825	
Output capacitance	C _{oss}	$V_{GS} = 0 V$	$V_{DS} = -25 \text{ V}, f = 1 \text{ MHz}$	=.	242	315	pF
Reverse transfer capacitance	C _{rss}			=.	228	297	
Total gate charge ^c	Qg			-	63	82	
Gate-source charge ^c	Q _{gs}	$V_{GS} = -10 \text{ V}$	$V_{DS} = -20 \text{ V}, I_D = -2.5 \text{ A}$	=.	9	12	nC
Gate-drain charge ^c	Q_{gd}			=.	12	15.5	
Gate resistance	R _g		f = 1 MHz	2.8	4.6	7.5	Ω
Turn-on delay time ^c	t _{d(on)}			=.	11.8	15.3	
Rise time ^c	t _r	V _{DD} :	= -20 V, $R_L = 8 \Omega$	=.	3.6	4.7	
Turn-off delay time ^c	t _{d(off)}	I _D \cong -2.5 A, V _{GEN} = -10 V, R _g = 1 Ω		-	64	83	ns
Fall time ^c	t _f			-	16	21.2	
Source-Drain Diode Ratings and Char	racteristics ^b						
Pulsed current ^a	I _{SM}			-	-	-64	Α
Forward voltage	V _{SD}	I _F =	-8.8 A, V _{GS} = 0 V	-	-0.8	-1.2	V
							•


Notes

- a. Pulse test; pulse width $\leq 300~\mu\text{s},$ duty cycle $\leq 2~\%$
- b. Guaranteed by design, not subject to production testing
- c. Independent of operating temperature


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.




TYPICAL CHARACTERISTICS (T_A = 25 °C, unless otherwise noted)




Output Characteristics




Transfer Characteristics




Transconductance



Transfer Characteristics




On-Resistance vs. Drain Current




Capacitance




TYPICAL CHARACTERISTICS (T_A = 25 °C, unless otherwise noted)




Capacitance




On-Resistance vs. Junction Temperature




On-Resistance vs. Gate-to-Source Voltage



Source Drain Diode Forward Voltage




Threshold Voltage




Drain Source Breakdown vs. Junction Temperature



THERMAL RATINGS ($T_A = 25$ °C, unless otherwise noted)




Safe Operating Area

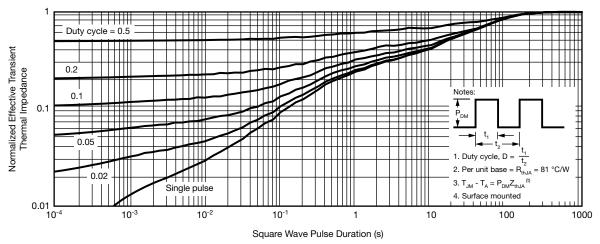

Normalized Thermal Transient Impedance, Junction-to-Ambient



THERMAL RATINGS (T_A = 25 °C, unless otherwise noted)

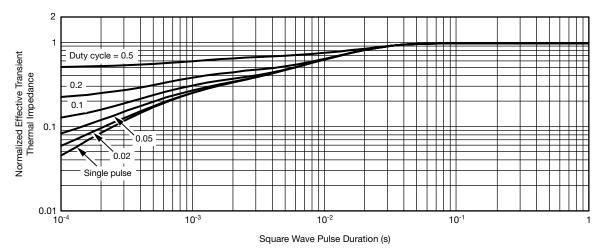

Normalized Thermal Transient Impedance, Junction-to-Case


Note

- The characteristics shown in the two graphs
 - Normalized Transient Thermal Impedance Junction-to-Ambient (25 °C)
 - Normalized Transient Thermal Impedance Junction-to-Case (25 °C) are given for general guidelines only to enable the user to get a "ball park" indication of part capabilities. The data are extracted from single pulse transient thermal impedance characteristics which are developed from empirical measurements. The latter is valid for the part mounted on printed circuit board FR4, size 1" x 1" x 0.062", double sided with 2 oz. copper, 100 % on both sides. The part capabilities can widely vary depending on actual application parameters and operating conditions

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package / tape drawings, part marking, and reliability data, see www.vishay.com/ppg?77427.



PowerPAK® 1212-8W Case Outline

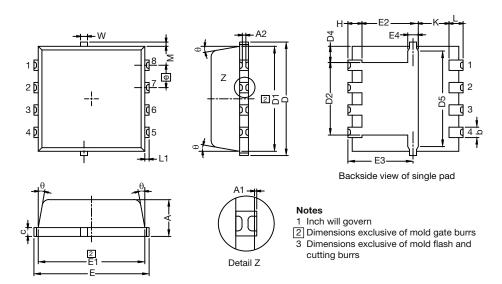

DIM.		MILLIMETERS			INCHES		
DINI.	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	
Α	0.97	1.04	1.12	0.038	0.041	0.044	
A1	0	-	0.05	0	-	0.002	
A2	0	-	0.13	0	-	0.005	
b	0.23	0.30	0.41	0.009	0.012	0.016	
С	0.23	0.28	0.33	0.009	0.011	0.013	
D	3.20	3.30	3.40	0.126	0.130	0.134	
D1	2.95	3.05	3.15	0.116	0.120	0.124	
D2	1.98	2.11	2.24	0.078	0.083	0.088	
D4		0.47 typ.			0.0185 typ.		
D5		2.3 typ.			0.090 typ.		
Е	3.20	3.30	3.40	0.126	0.130	0.134	
E1	2.95	3.05	3.15	0.116	0.120	0.124	
E2	1.47	1.60	1.73	0.058	0.063	0.068	
E3	1.75	1.85	1.98	0.069	0.073	0.078	
E4	0.34 typ.			0.013 typ.			
е	0.65 BSC.			0.026 BSC			
K		0.86 typ.			0.034 typ.		
Н	0.30	0.41	0.51	0.012	0.016	0.020	
L	0.30	0.43	0.56	0.012	0.017	0.022	
L1	0.06	0.13	0.20	0.002	0.005	0.008	
θ	0°	-	12°	0°	-	12°	
W	0.15	0.25	0.36	0.006	0.010	0.014	
М		0.125 typ.			0.005 typ.		

DWG: 6032



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.