

# XXZPB100

teach mode pushbutton - selection of detection window - for ultrasonic sensor



## Main

Accessory / separate part designation	Teach mode push-button
Accessory / separate part destination	Ultrasonic sensor
Accessory / separate part category	Sensor accessories
Accessory / separate part type	Push-button

## Complementary

Product compatibility	XX518A3.AM12 XX7V1A1.AM12
Electrical connection	1 male connector M12 3 pins straight 1 female connector 4 pins straight
Product weight	0.035 kg

## Environment


### Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1140 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold

### Contractual warranty


Warranty period	18 months
-----------------	-----------

## Dimensions

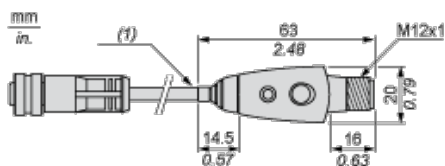

(1) Cable, length: 152 mm.

## Wiring for Teaching of Detection Window

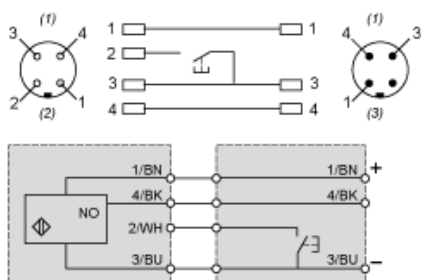

(1) M12 female connector

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

- (2) Sensor side
- (3) Output
- BN** Brown
- WH** White
- BU** Blue
- BK** Black