

ATV340D30N4E

variable speed drive - 30kW- 400V - 3 phases - ATV:



Main

| | |
|------------------------------------|--|
| Range of product | Altivar Machine ATV340 |
| Product or component type | Variable speed drive |
| Device application | Machine |
| Device short name | ATV340 |
| Variant | Standard version |
| Product destination | Asynchronous motors Synchronous motors |
| Mounting mode | Wall mount |
| EMC filter | Integrated with <= 50 m motor cable maxi c EN/IEC 61800-3 category C2 Integrated with <= 150 m motor cable maxi EN/IEC 61800-3 category C3 |
| IP degree of protection | IP20 conforming to IEC 60529 IP20 conforming to IEC 61800-5-1 |
| Degree of protection | UL type 1 conforming to UL 508C |
| Type of cooling | Forced convection |
| Supply frequency | 50...60 Hz +/- 5 % |
| Network number of phases | 3 phases |
| [Us] rated supply voltage | 380...480 V - 15...10 % |
| Motor power kW | 37 kW (normal duty) 30 kW (heavy duty) |
| Motor power hp | 50 hp (normal duty) 40 hp (heavy duty) |
| Line current | 66.2 A at 380 V with internal line choke (no 57.3 A at 480 V with internal line choke (no 66.2 A at 380 V with internal line choke (hea 57.3 A at 480 V with internal line choke (hea 54.8 A 48.3 A |
| Prospective line I _{sc} | 50 kA |
| Apparent power | 47.6 kVA at 480 V (normal duty) 40.2 kVA at 480 V (heavy duty) |
| Continuous output current | 74.5 A at 4 kHz (normal duty) 61.5 A at 4 kHz (heavy duty) |
| Maximum transient current | 92.3 A during 60 s (heavy duty) 89.4 A during 60 s (normal duty) 89.4 A during 2 s (normal duty) 92.3 A during 2 s (heavy duty) |
| Asynchronous motor control profile | Constant torque standard Variable torque standard Optimized torque mode |
| Synchronous motor control profile | Permanent magnet motor Reluctance motor |
| Speed drive output frequency | 0.1...500 Hz |
| Nominal switching frequency | 4 kHz |
| Switching frequency | 2...16 kHz adjustable 4...16 kHz with |
| Safety function | STO (safe torque off) SIL 3 |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Complementary

| | |
|-----------------------------|------------------------------|
| Discrete input logic | 16 preset speeds |
| Communication port protocol | Ethernet/IP Modbus serial |

Modbus TCP

| | |
|-------------------------------------|---|
| Option card | Slot GP-X : digital and analog I/O extension module Slot GP-X : output relay extension module Slot GP-ENC : 5/12 V digital encoder interface module Slot GP-ENC : analog encoder interface module Slot GP-ENC : resolver encoder interface module |
| Output voltage | <= power supply voltage |
| Permissible temporary current boost | 1.5 x In for 60 s (heavy duty) 1.2 x In for 60 s (normal duty) |
| Motor slip compensation | Adjustable Automatic whatever the load Can be suppressed Not available in permanent magnet motor law |
| Acceleration and deceleration ramps | S, U or customized Linear adjustable separately from 0.01...9999 s |
| Braking to standstill | By DC injection |
| Protection type | Motor: thermal protection Drive: thermal protection Drive: overheating Drive: line supply overvoltage Drive: line supply undervoltage Drive: break on the control circuit Motor: safe torque off Drive: safe torque off Drive: short-circuit between motor phases Motor: motor phase loss Drive: overcurrent Drive: output overcurrent between motor phase and earth Drive: output overcurrent between motor phases Drive: short-circuit between motor phase and earth Drive: motor phase loss Drive: DC Bus overvoltage Drive: input supply loss Drive: exceeding limit speed |
| Frequency resolution | Display unit: 0.1 Hz Analog input: 0.012/50 Hz |
| Electrical connection | Screw terminal with clamping capacity: 35...50 mm ² , AWG 3...AWG 1 on line side Screw terminal with clamping capacity: 25...50 mm ² , AWG 4...AWG 1 on DC bus Screw terminal with clamping capacity: 35...50 mm ² , AWG 3...AWG 1 on motor Screw terminal with clamping capacity: 0.75...1.5 mm ² , AWG 18...AWG 16 on control |
| Connector type | Connector(s)1 x RJ45, Modbus serial on front face Connector(s)1 x RJ45, Modbus serial for HMI on front face Connector(s)2 x RJ45, Ethernet IP/Modbus TCP on front face |
| Physical interface | 2-wire RS 485 Modbus serial |
| Transmission frame | RTU Modbus serial |
| Transmission rate | 10/100 Mbit/s Ethernet IP/Modbus TCP 4800 bps, 9600 bps, 19200 bps, 38.4 Kbps Modbus serial |
| Exchange mode | Half duplex, full duplex, autonegotiation Ethernet IP/Modbus TCP |
| Data format | 8 bits, configurable odd, even or no parity Modbus serial |
| Type of polarization | No impedance Modbus serial |
| Number of addresses | Modbus serial |
| Method of access | Slave Modbus TCP Slave Modbus RTU |
| Supply | External supply for digital inputs : 24 V DC (19...30 V), <= 1.25 mA, protection type: overcurrent protection Internal supply for reference potentiometer (1 to 10 kOhm) : 10.5 V DC +/- 5 %, <= 10 mA, overcurrent and short-circuit protection Internal supply for digital inputs and STO : 24 V DC (21...27 V), <= 200 mA, protection type: overcurrent and short-circuit protection |
| Local signalling | 3 LED, mono/dual colour for local diagnostic 5 LED, dual colour for embedded communication status 2 LED, dual colour for communication module status 1 LED, red for presence of voltage |
| Width | 213 mm |
| Height | 660 mm |
| Depth | 262 mm |
| Product weight | 27.9 kg |
| Analogue input number | 3 |

| | |
|---------------------------|--|
| Analogue input type | AI1, AI2, AI3 software-configurable voltage : 0...10 V DC, impedance 31.5 kOhm, resolution 12 bits AI1, AI3 software-configurable current : 0...20 mA, impedance 250 Ohm, resolution 12 bits AI1, AI3 software-configurable temperature probe or water level sensor |
| Discrete input number | 10 |
| Discrete input type | STOA, STOB safe torque off, 24 V DC (≤ 30 V), impedance > 2.2 kOhm DI7, DI8 programmable as pulse input : 0...30 kHz, 24 V DC (≤ 30 V) DI1...DI8 programmable, 24 V DC (≤ 30 V), impedance 4.4 kOhm |
| Input compatibility | STOA, STOB : discrete input level 1 PLC conforming to EN/IEC 61131-2 DI1...DI8 : discrete input level 1 PLC conforming to EN/IEC 61131-2 DI7, DI8 : pulse input level 1 PLC conforming to IEC 65A-68 |
| Discrete input logic | STOA, STOB positive logic (source) at State 0: < 5 V, at State 1: > 11 V DI1...DI8 positive logic (source) at State 0: < 5 V, at State 1: > 11 V DI1...DI8 negative logic (sink) at State 0: > 16 V, at State 1: < 10 V DI7, DI8 positive logic (source) at State 0: < 0.6 V, at State 1: > 2.5 V |
| Analogue output number | 2 |
| Analogue output type | Software-configurable voltage AQ1, AQ2 : 0...10 V DC impedance 470 Ohm, resolution 12 bits Software-configurable current AQ1, AQ2 : 0...20 mA impedance 500 Ohm, resolution 12 bits |
| Discrete output number | 2 |
| Input/output type | Logic output DQ- : 0...1 kHz, ≤ 30 V DC, 100 mA Logic output DQ+ : 0...1 kHz, ≤ 30 V DC, 100 mA Programmable as pulse output DQ+ : 0...30 kHz, ≤ 30 V DC, 20 mA |
| Sampling duration | Discrete input DI1...DI8 : 2 ms (+/- 0.5 ms) Pulse input DI7, DI8 : 5 ms (+/- 1 ms) Analog input AI1, AI2, AI3 : 1 ms (+/- 1 ms) Analog output AQ1, AQ2 : 5 ms (+/- 1 ms) |
| Accuracy | Analog input AI1, AI2, AI3 : +/- 0.6 % for a temperature variation 60 °C Analog output AQ1, AQ2 : +/- 1 % for a temperature variation 60 °C |
| Linearity error | AI1, AI2, AI3 : +/- 0.15 % of maximum value for analog input AQ1, AQ2 : +/- 0.2 % for analog output |
| Relay output number | 3 |
| Relay output type | Configurable relay logic R1 : fault relay NO/NC 100000 cycles at maximum switching current Configurable relay logic R2 : sequence relay NO 100000 cycles at maximum switching current Configurable relay logic R3 : sequence relay NO 100000 cycles at maximum switching current |
| Refresh time | Relay output R1, R2, R3 : 5 ms (+/- 0.5 ms) |
| Minimum switching current | Relay output R1, R2, R3 : 5 mA at 24 V DC |
| Maximum switching current | Relay output R1 : 3 A at 250 V AC on resistive load ($\cos \phi = 1$) Relay output R1 : 3 A at 30 V DC on resistive load ($\cos \phi = 1$) Relay output R1 : 2 A at 250 V AC on inductive load ($\cos \phi = 0.4$ and $L/R = 7$ ms) Relay output R1 : 2 A at 30 V DC on inductive load ($\cos \phi = 0.4$ and $L/R = 7$ ms) Relay output R2, R3 : 5 A at 250 V AC on resistive load ($\cos \phi = 1$) Relay output R2, R3 : 5 A at 30 V DC on resistive load ($\cos \phi = 1$) Relay output R2, R3 : 2 A at 250 V AC on inductive load ($\cos \phi = 0.4$ and $L/R = 7$ ms) Relay output R2, R3 : 2 A at 30 V DC on inductive load ($\cos \phi = 0.4$ and $L/R = 7$ ms) |

Environment

| | |
|---------------------------------------|--|
| isolation | Between power and control terminals |
| insulation resistance | > 1 mOhm 500 V DC for 1 minute to earth |
| noise level | 63.5 dB conforming to 86/188/EEC |
| power dissipation in W | Natural convection : 77 W at 380 V, switching frequency 4 kHz (heavy duty) Forced convection : 640 W at 380 V, switching frequency 4 kHz (heavy duty) Natural convection : 90 W at 380 V, switching frequency 4 kHz (normal duty) Forced convection : 796 W at 380 V, switching frequency 4 kHz (normal duty) |
| volume of cooling air | 240 m ³ /h |
| operating position | Vertical +/- 10 degree |
| electromagnetic compatibility | 1.2/50 μ s - 8/20 μ s surge immunity test level 3 conforming to IEC 61000-4-5 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 |
| pollution degree | 2 conforming to EN/IEC 61800-5-1 |
| vibration resistance | 1.5 mm peak to peak ($f = 2...13$ Hz) conforming to IEC 60068-2-6 1 gn ($f = 13...200$ Hz) conforming to IEC 60068-2-6 |
| shock resistance | 15 gn (duration = 11 ms) conforming to EN/IEC 60721-3-3 class 3M3 |
| relative humidity | 5...95 % without condensation conforming to IEC 60068-2-3 |
| ambient air temperature for operation | 50...60 °C with current derating (heavy duty) 40...60 °C with current derating (normal duty) |


| | |
|-------------------------------------|--|
| | -15...50 °C without current derating (heavy duty) -15...40 °C without current derating (normal duty) |
| ambient air temperature for storage | -40...70 °C |
| operating altitude | <= 1000 m without derating 1000...4800 m with current derating 1 % per 100 m |
| environmental characteristic | Chemical pollution resistance class 3C3 conforming to EN/IEC 60721-3-3 Dust pollution resistance class 3S3 conforming to EN/IEC 60721-3-3 |
| standards | EN/IEC 61800-3 EN/IEC 61800-3 environment 1 category C2 EN/IEC 61800-3 environment 2 category C3 UL 508C EN/IEC 61800-5-1 IEC 61000-3-12 IEC 60721-3 IEC 61508 IEC 13849-1 |
| product certifications | CSA TÜV UL REACH |
| marking | CE |

Offer Sustainability


| | |
|----------------------------------|---|
| Sustainable offer status | Green Premium product |
| RoHS (date code: YYWW) | Compliant - since 1426 - Schneider Electric declaration of conformity |
| REACH | Reference not containing SVHC above the threshold |
| Product environmental profile | Available |
| Product end of life instructions | Available |

Dimensions

Views: Front - Left - Rear

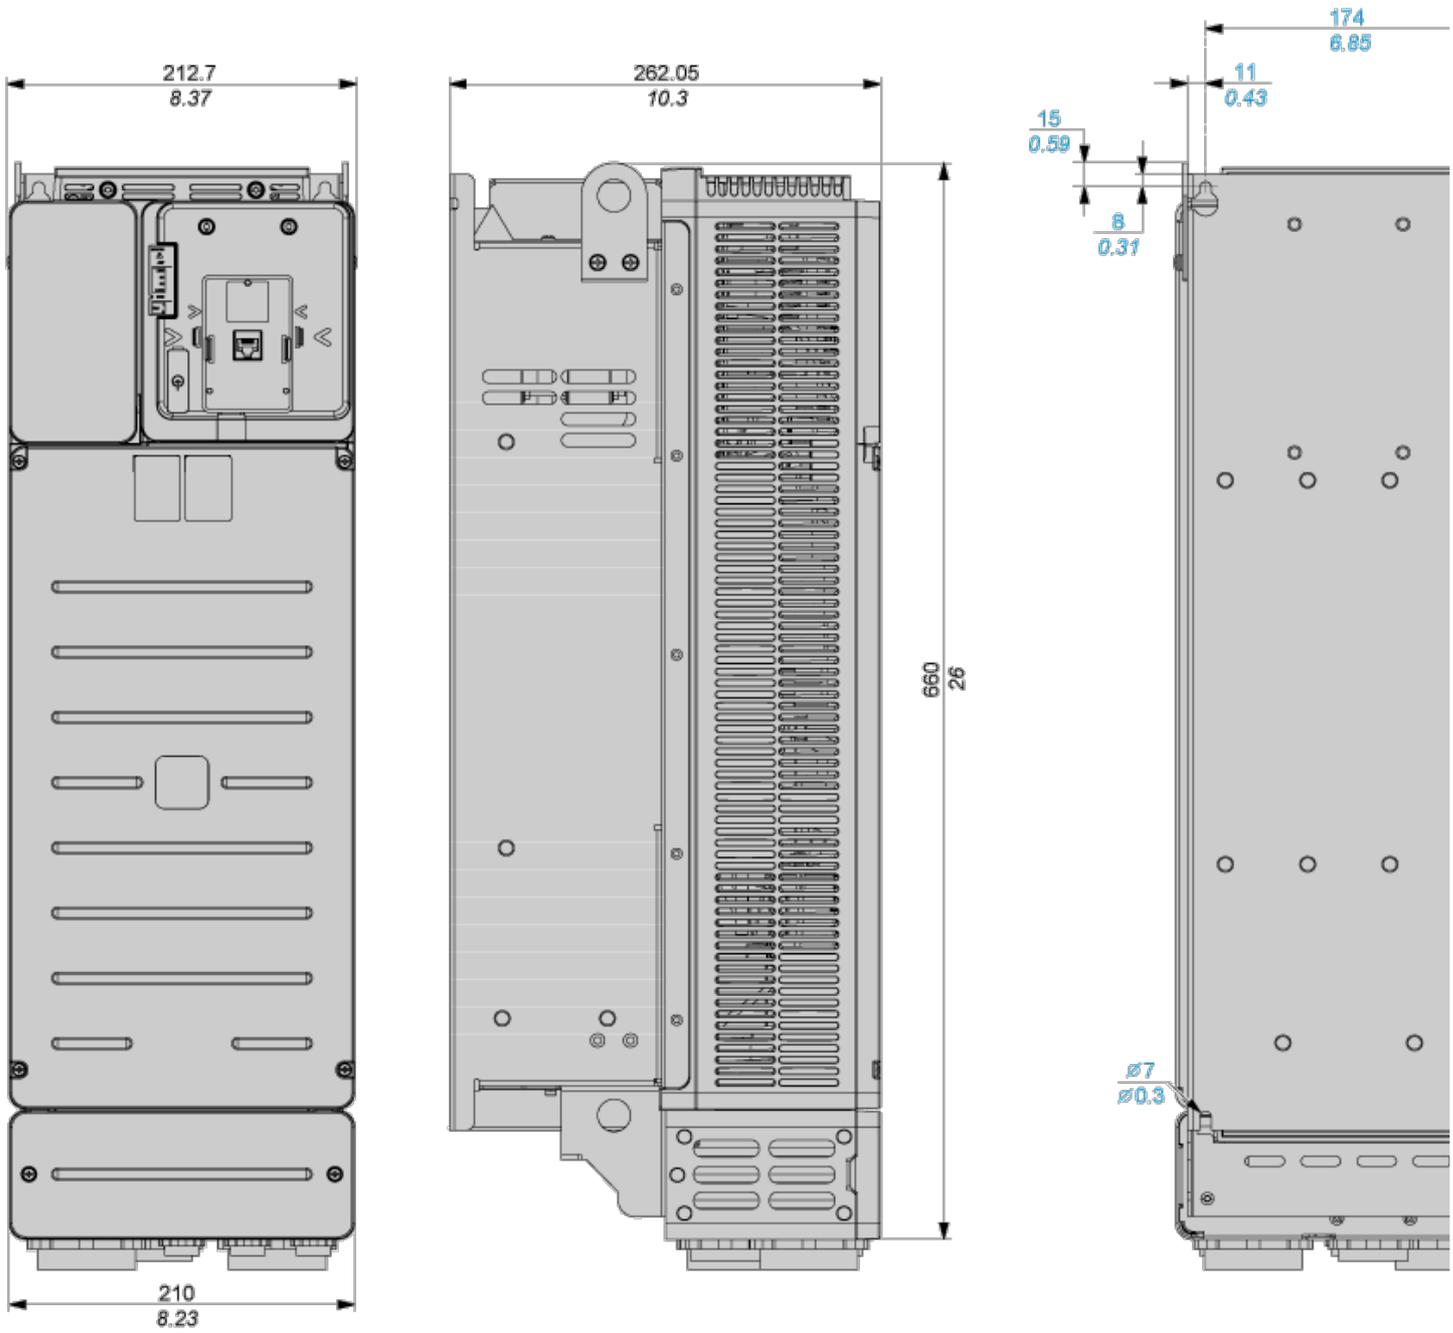

Clearance

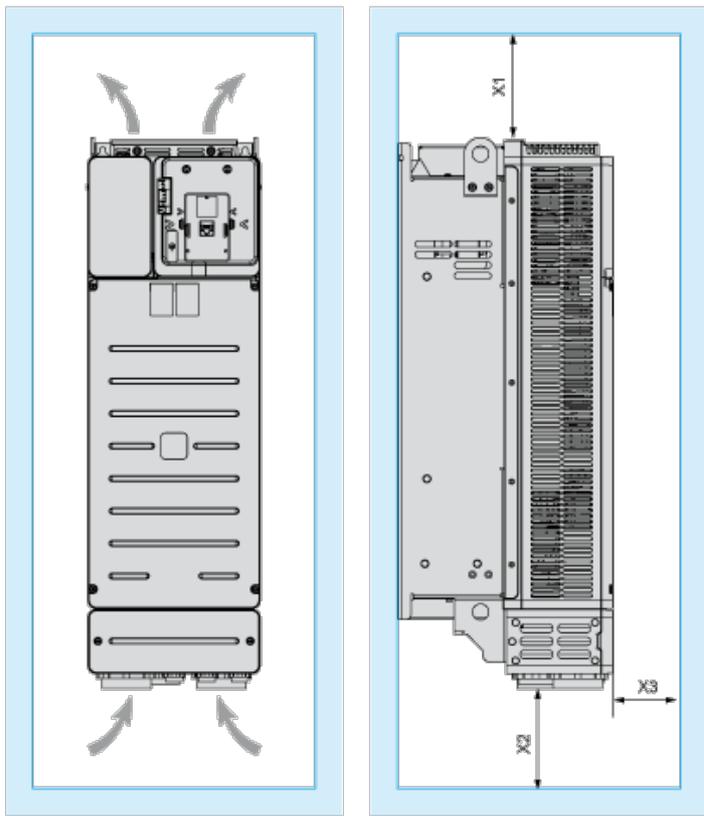

Dimensions in mm


| X1 | X2 | X3 |
|-------|-------|------|
| ≈ 100 | ≈ 100 | ≈ 10 |

Dimensions in in.

| X1 | X2 | X3 |
|--------|--------|--------|
| ≈ 3.94 | ≈ 3.94 | ≈ 0.39 |


Mounting Types

Mounting Type A: Side by Side IP20

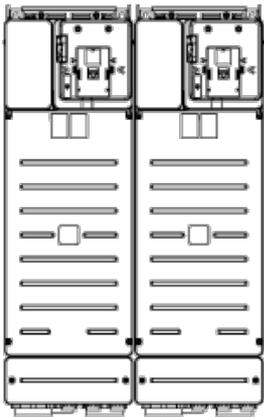

Possible, up to 50 °C, 2 drives only

Mounting Type B: Individual IP20

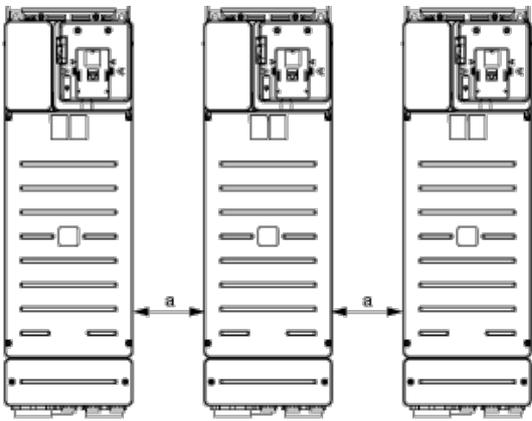


a ≥ 110 mm (4.33 in.)

Connections and Schema

Three-Phase Power Supply with Upstream Breaking via Line Contactor Without Safety Function STO

Connection diagrams conforming to standards ISO13849 category 1 and IEC/EN 61508 capacitySIL1, stopping category 0 in accordance with stand 1.

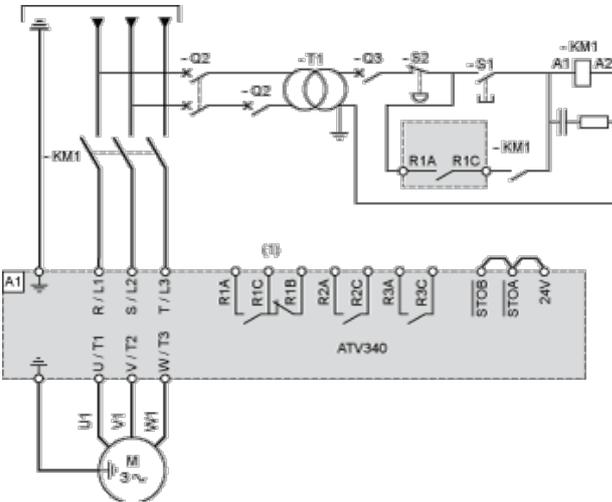

(1) Use relay output R1 set to operating state Fault to switch Off the product once an error is detected.

A1 : Drive

KM1 :Line Contactor

Q2, Circuit breakers


Q3 :

S1 : Pushbutton

S2 : Emergency stop

T1 : Transformer for control part

Three-Phase Power Supply with Downstream Breaking via Switch Disconnecter

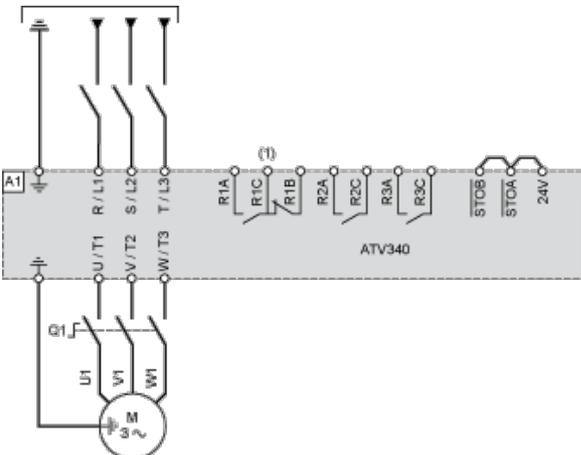


(1) Use relay output R1 set to operating state Fault to switch Off the product once an error is detected.

A1 : Drive


Q1 : Switch disconnector

Sensor Connection



It is possible to connect either 1 or 3 sensors on terminals A11/AI3.

Control Block Wiring Diagram

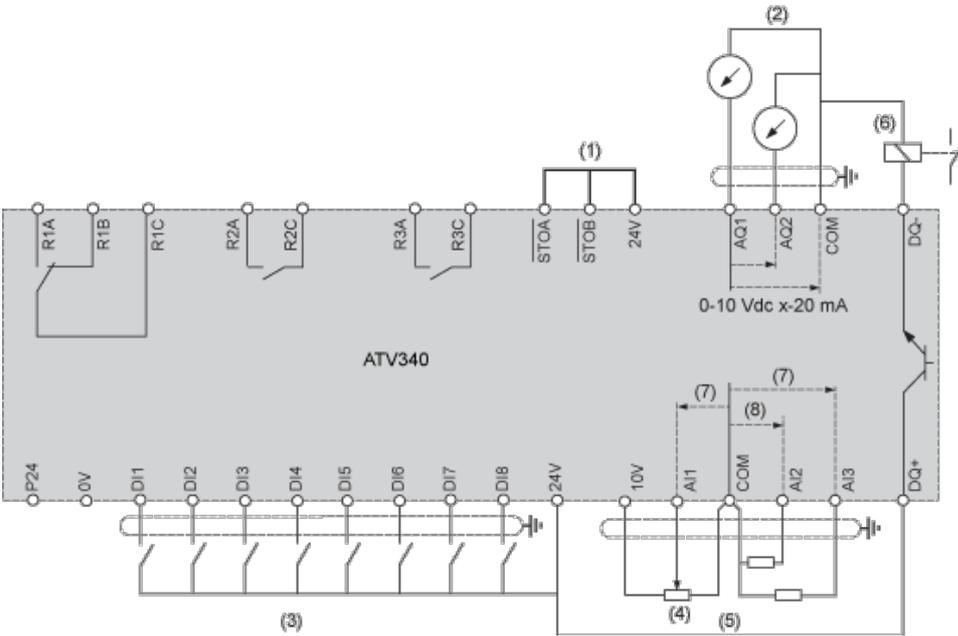

- (1) Safe Torque Off
- (2) Analog Output
- (3) Digital Input
- (4) Reference potentiometer
- (5) Analog Input
- (6) Digital Output
- (7) 0-10 Vdc, x-20 mA
- (8) 0-10 Vdc, -10 Vdc...+10 Vdc

A1 : ATV340 Drive

R1A, Fault relay

R1B,

R1C :

R2A, Sequence relay


R2C :

R3A, Sequence relay


R3C :

Digital Inputs Wiring


Switch Set to SRC (Source) Position Using the Output Power Supply for the Digital Inputs

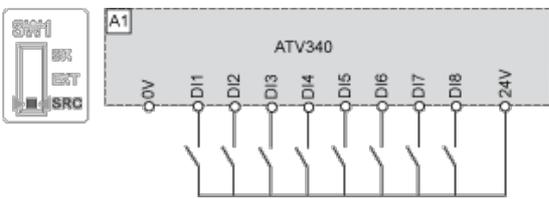


Switch Set to SRC (Source) Position and Use of an External Power Supply for the DIs

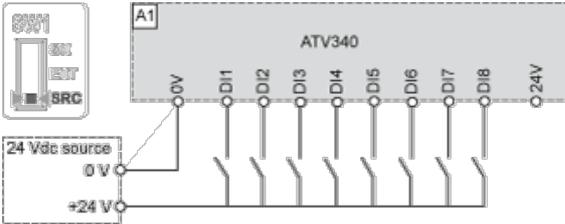

Switch Set to SK (Sink) Position Using the Output Power Supply for the Digital Inputs

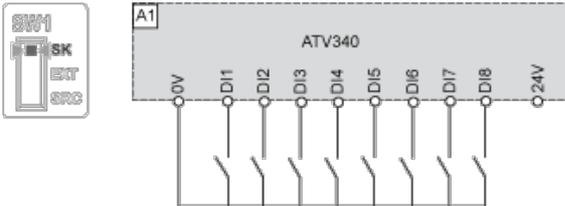


Switch Set to EXT Position Using an External Power Supply for the DIs

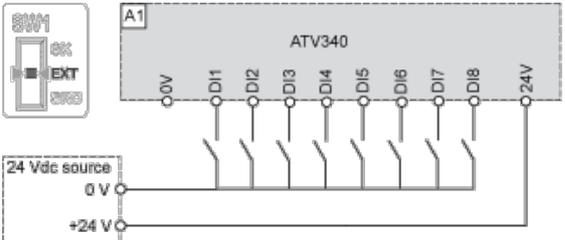

Digital Outputs Wiring


Digital Outputs: Internal Supply

Positive Logic, Source, European Style, DQ switches to +24V

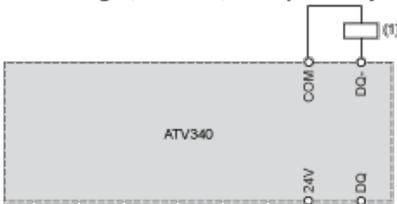

(1) Relay or valve


Negative Logic, Sink, Asian Style, DQ switches to 0V

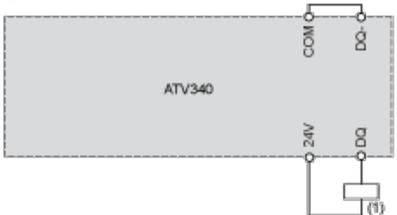

(1) Relay or valve


Digital Outputs: External Supply

Positive Logic, Source, European Style, DQ switches to +24V

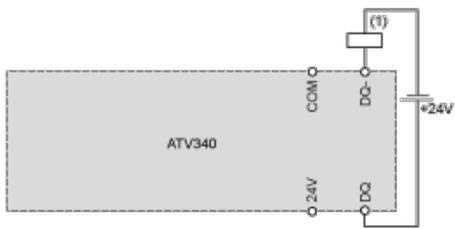


(1) Relay or valve

Negative Logic, Sink, Asian Style, DQ switches to 0V

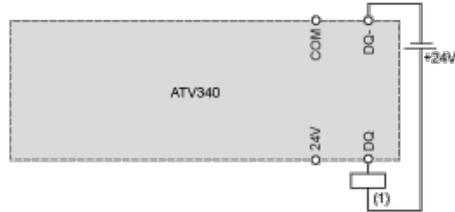


(1) Relay or valve

Open Loop Applications

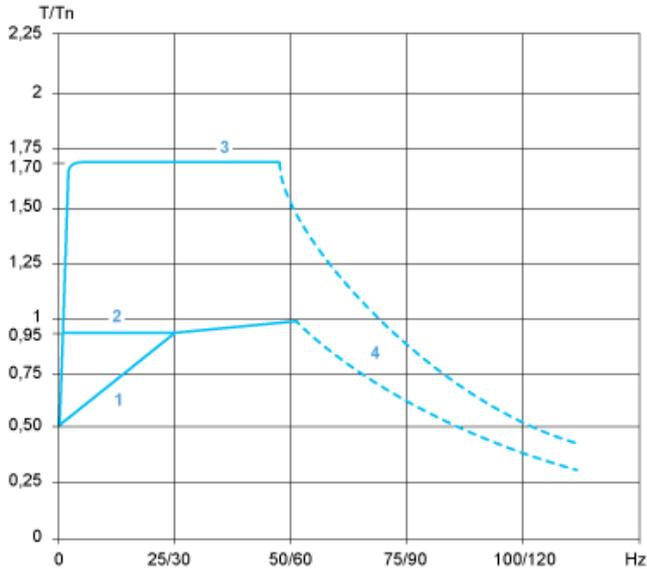

- 1 : Self-cooled motor: continuous useful torque
- 2 : Force-cooled motor: continuous useful torque
- 3 : Overtorque for 60 s maximum
- 4 : Torque in overspeed at constant power

Closed Loop Applications

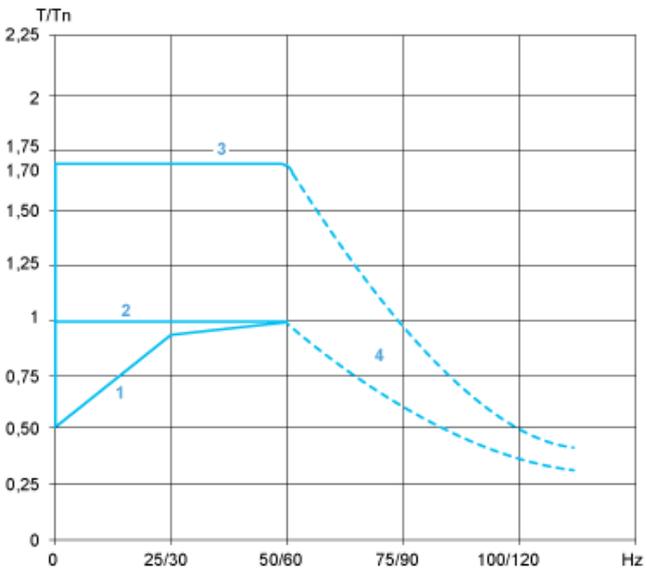

- 1 : Self-cooled motor: continuous useful torque
- 2 : Force-cooled motor: continuous useful torque
- 3 : Overtorque for 60 s maximum
- 4 : Torque in overspeed at constant power