



Main

Range of product	Harmony XVC1
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Buzzer
Mounting diameter	100 mm
Component name	XVC
Light source	Green LED steady or flashing signalling Orange LED steady or flashing signalling Red LED steady or flashing signalling
[Us] rated supply voltage	100...240 V
Supply circuit type	AC
Noise level	60...85 dB (continuous or intermittent tone) at 1 m

Complementary

Material	Illuminated unit : polycarbonate Base unit : ABS (acrylonitrile butadiene-styrene) Top cover : PBT + ABS (UL94-V0)
Product mounting	On base
Cable cross section	0.33 mm ² 0.83 mm ²
AWG gauge	AWG 18 AWG 22
Cable length	500 mm
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	170 mA
Flashing frequency	0.7...3 Hz
Product weight	1.45 kg
Height	372 mm

Environment

standards	EN/IEC 60947-1 EN/IEC 60947-5-1
product certifications	UL
protective treatment	TC
ambient air temperature for storage	-35...70 °C
ambient air temperature for operation	-30...50 °C
electrical shock protection class	Class I conforming to EN/IEC 61140
IP degree of protection	IP54 conforming to EN/IEC 60529

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0808 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

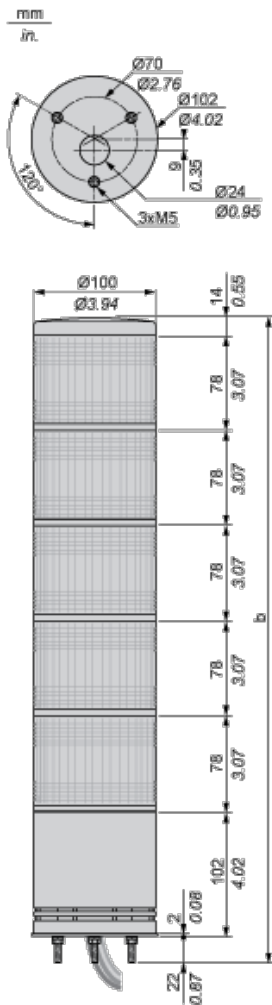

No. of illuminated units	b in mm	b in in.
1	216	8.50
2	294	11.57
3	372	14.65
4	450	17.72
5	528	20.79

Pre-assembled and Pre-wired Tower Light

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

mm
in.

