# XVC6M15S

## 60mm Twer R Ple Buzzer Flash 100-240VAC





#### Main

Range of product	Harmony XVC6	
Product or component type	Complete pre-wired monolithic tower light	
Beacon or indicator bank unit type1 illuminated unit		
Sound signalling	Buzzer	
Mounting diameter	60 mm	
Component name	XVC	
Light source	Red LED steady or flashing	
[Us] rated supply voltage	100240 V	
Supply circuit type	AC	
Noise level	7085 dB (continuous or intermittent tone) at 1 m	

### Complementary

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94-V0) (top cover)	
Product mounting	On support tube, 22 mm	
Cable cross section	0.33 mm <sup>2</sup> 0.83 mm <sup>2</sup>	
AWG gauge	AWG 18 AWG 22	
Cable length	450 mm	
Marking	CE	
[Uimp] rated impulse withstand voltage	4 kV	
Current consumption	60 mA	
Fundamental frequency	2.23 kHz	
Flashing frequency	1 Hz	
Product weight	1.01 kg	
Height	599.8 mm	

#### **Environment**

standards	EN/IEC 60947-1 EN/IEC 60947-5-1	
product certifications	UL	
protective treatment	TC	
ambient air temperature for storage	-3570 °C	
ambient air temperature for operation	-1050 °C	
electrical shock protection class	Class I conforming to EN/IEC 61140	
IP degree of protection	IP23 in vertical surface installation conforming to EN/IEC 60529 IP54 in flat surface installation conforming to EN/IEC 60529	

### Offer Sustainability


Sustainable offer status	Green Premium product	Green Premium product	
RoHS (date code: YYWW)	Compliant - since 0808 - Schneider Electric declaration of conformity		
REACh	Reference not containing SVHC above the threshold		
Product environmental profile	Available		
Product end of life instructions	Need no specific recycling operations		

18 months

## Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

#### **Dimensions**

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b1** dimension.

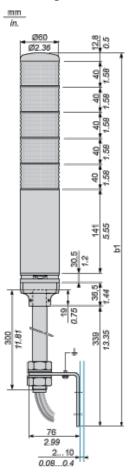

No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	599.8	23.61
2 stages	639.8	25.19
3 stages	679.8	26.76
4 stages	719.8	28.34
5 stages	759.8	29.91

# **Pre-assembled and Pre-wired Tower Light**

**Support Tube Mounting** 

