

# XBKT5000U10M

totalising counter - mechanical 5 digit display - 24 V DC



## Main

Range of product	Zelio Count
Product or component type	Totalising counter
Display type	Mechanical
Size	31 x 41.5 mm
Display digits	5 digit(s) 4 mm
Counting frequency	20 Hz
Reset	Manual
Counting capacity	0...99 999
Technology type	Electromechanical

## Complementary

[Us] rated supply voltage	24 V DC (Us +/- 10 %)
Power consumption in W	1.5 W
Output type	1 relay C/O 20 V
Backup time	Permanent
Counting mode	Adding
Input function	Counting
Input type	Contact
Mechanical durability	10000000 cycles
Mounting mode	Flush-mounted
Mounting support	Panel mounting
Connections - terminals	AMP lugs on connection box
Height	31 mm
Product weight	0.1 kg
Width	41.5 mm
CAD overall width	42 mm
CAD overall height	31 mm
CAD overall depth	75 mm

## Environment

standards	EN/IEC 50081-2 EN/IEC 50082-2
product certifications	CURus
IP degree of protection	IP40 conforming to EN/IEC 60529
ambient air temperature for operation	-10...50 °C
ambient air temperature for storage	-20...60 °C
vibration resistance	5 gn (f = 10...150 Hz) conforming to EN/IEC 60068-2-6
shock resistance	30 gn for 6 ms conforming to EN/IEC 60068-2-27
electrical shock protection class	Class II conforming to IEC 60536

## Contractual warranty

Warranty period	18 months
-----------------	-----------

## Electromechanical and Electronic Totalizing Counters


Dimensions, Flush-Mounting

Counters Dimensions	Flush-Mounting
XBKT50000U••M, XBKT70000U••M	
<p>mm in.</p> <p>64,2 2,53 75 2,95</p> <p>41,5 1,63</p> <p>31 1,22</p>	<p>mm in.</p> <p>38,5 1,52</p> <p>27 1,06</p>
XBKT60000U00M	
<p>mm in.</p> <p>33,7 1,33 42,3 1,67</p> <p>30 1,18</p> <p>20 0,79</p>	<p>mm in.</p> <p>37<sup>+0,05</sup> 1,06<sup>+0,002</sup></p> <p>14,2 0,56</p>
XBKT60000U1•M	
<p>mm in.</p> <p>88 3,47 101,5 3,99</p> <p>60 2,36</p> <p>38 1,5 50 1,97</p>	<p>mm in.</p> <p>2xØ4,3 2xØ2,17</p> <p>29,5 1,16</p> <p>55 2,17</p>
XBKT80000U00M	
<p>mm in.</p> <p>88 3,47 94 3,7</p> <p>60 2,36</p> <p>38 1,5 50 1,97</p>	<p>mm in.</p> <p>2xØ4,3 2xØ2,17</p> <p>29,5 1,16</p> <p>55 2,17</p>
XBKT81030U33E	
<p>mm in.</p> <p>32 1,26 40 1,58</p> <p>48 1,89</p> <p>24 0,95</p>	<p>mm in.</p> <p>45<sup>+0,1</sup> 1,77<sup>+0,004</sup></p> <p>22<sup>+0,3</sup> 0,87<sup>+0,012</sup></p>
e: panel thickness, 1 mm < e < 2.5 mm / 0.039 in. < e < 0.098	


Wiring Diagrams of Electromechanical and Electronic Totalizing Counters

Counters with Mechanical Display

XBKT50000U••M, XBKT70000U00M




**XBKT60000U1•M, XBKT80000U00M**

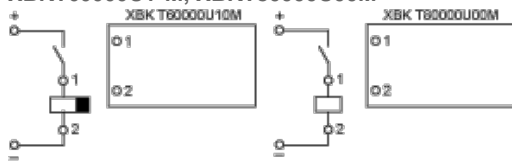

**Counters with LCD Display, Lithium Battery Supply**


**XBKT181030U33E**

**PNP Transistor, NPN Transistor**




- 1: Keylock
- 2: 0 V
- 3: Count
- 4: Reset

**Reset Key Locking Facility**



- 1: Keylock
- 2: 0 V
- 3: Count
- 4: Reset

**Volt-free Contact**



- 1: Keylock
- 2: 0 V
- 3: Count
- 4: Reset