

Unidirectional and Bidirectional Surface Mount Transient Voltage Suppressor

multicomp PRO



Features:

- Rating to 200V V_{BR}
- For surface mounted applications
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has UL recognition 94V-0
- Typical IR less than 1 μ A above 10V
- Fast response time : typically less than 1.0ns for Uni-direction, less than 5.0ns for Bi-direction, from 0 Volts to BV min

Mechanical Data:

Case	: Molded Plastic
Polarity	: Cathode band denotes uni-directional device No cathode band denotes bi-directional device
Weight	: 0.002 ounces, 0.053 grams
Reverse Voltage	: 5 to 170 Volts
Power Dissipation	: 400 Watts

Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Characteristics	Symbol	Values	Unit
Peak Power Dissipation at $T_A = 25^\circ\text{C}$ TP = 1ms (Note 1, 2)	P_{PK}	Min. 400	Watts
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I_{FSM}	40	Amps
Steady State Power Dissipation at $T_L = 75^\circ\text{C}$	$P_{M(AV)}$	1	Watts
Max. Instantaneous Forward Voltage at 50A for Uni-Directional Devices Only (Note 3)	V_F	3.5	Volts
Operating Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +175	$^\circ\text{C}$

Notes:

1. Non-repetitive current pulse ,per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 1.
2. Thermal Resistance junction to Lead.
3. 8.3ms single half-wave duty cycle=4 pulses per minutes maximum (uni-directional units only).

Unidirectional and Bidirectional Surface Mount Transient Voltage Suppressor

multicomp PRO

Part Number		Working Peak Reverse Voltage V _{RWM} (V)	Breakdown Voltage VBR Volts			Max. Reverse Voltage at I _{RSM} (Clamping Voltage) V _{RSM} (V)	Max. Reverse Surge Current I _{RSM} (Amps)	Max. Reverse Leakage at V _{RWM} IR (μA)
Device Unidirectional	Device Bidirectional		Min. (V)	Max. (V)	I _t (mA)			
SMAJ10A	SMAJ10CA	10	11.1	12.3	1	17	23.5	5/10
-	SMAJ11CA	11	12.2	13.5	1	18.2	22	5
SMAJ120A	-	120	133	147	1	193	2	5
SMAJ12A	SMAJ12CA	12	13.3	14.7	1	19.9	20.1	5
SMAJ13A	SMAJ13CA	13	14.4	15.9	1	21.5	18.6	5
SMAJ150A	SMAJ150CA	150	167	185	1	243	1.6	5
SMAJ15A	SMAJ15CA	15	16.7	18.5	1	24.4	16.4	5
SMAJ16A	-	16	17.8	19.7	1	26	15.3	5
SMAJ18A	SMAJ18CA	18	20	22.1	1	29.2	13.7	5
SMAJ20A	SMAJ20CA	20	22.2	24.5	1	32.4	12.3	5
SMAJ22A	-	22	24.4	26.9	1	35.5	11.2	5
SMAJ24A	SMAJ24CA	24	26.7	29.5	1	38.9	10.3	5
SMAJ26A	SMAJ26CA	26	28.9	31.9	1	42.1	9.5	5
SMAJ28A	-	28	31.1	34.4	1	45.4	8.8	5
SMAJ30A	SMAJ30CA	30	33.3	36.8	1	48.4	8.3	5
SMAJ33A	SMAJ33CA	33	36.7	40.6	1	53.3	7.5	5
SMAJ36A	SMAJ36CA	36	40	44.2	1	58.1	6.9	5
SMAJ40A	SMAJ40CA	40	44.4	49.1	1	64.5	6.2	5
-	SMAJ43CA	43	47.8	52.8	1	69.4	5.7	5
-	SMAJ48CA	48	53.3	58.9	1	77.4	5.2	5
SMAJ5.0A	SMAJ5.0CA	5	6.4	7	10	9.2	43.5	800/1600
SMAJ51A	SMAJ51CA	51	56.7	62.7	1	82.4	4.9	5
SMAJ54A	SMAJ54CA	54	60	66.3	1	87.1	4.6	5
SMAJ58A	SMAJ58CA	58	64.4	71.2	1	93.6	4.3	5
SMAJ6.0A	-	6	6.67	7.37	10	10.3	38.8	800/1600
SMAJ6.5A	-	6.5	7.22	7.98	10	11.2	35.7	500/1000
SMAJ60A	-	60	66.7	73.7	1	96.8	4.1	5
SMAJ64A	-	64	71.1	78.6	1	103	3.9	5
-	SMAJ7.0CA	7	7.78	8.6	10	12	33.3	200/400
SMAJ7.5A	-	7.5	8.33	9.21	1	12.9	31	100/200
SMAJ8.5A	-	8.5	9.44	10.4	1	14.4	27.7	10/20
-	SMAJ9.0CA	9	10	11.1	1	15.4	26	5/10

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

Ratings and Characteristic Curves

FIG.1-PULSE DERATING CURVE

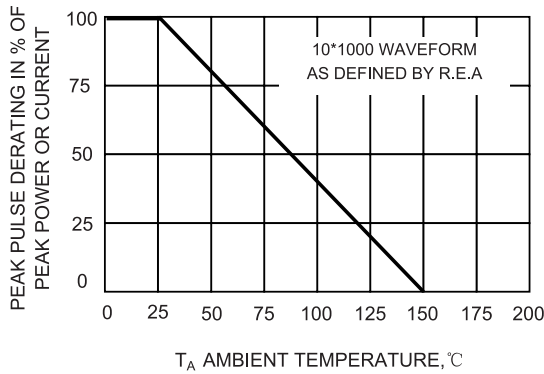


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

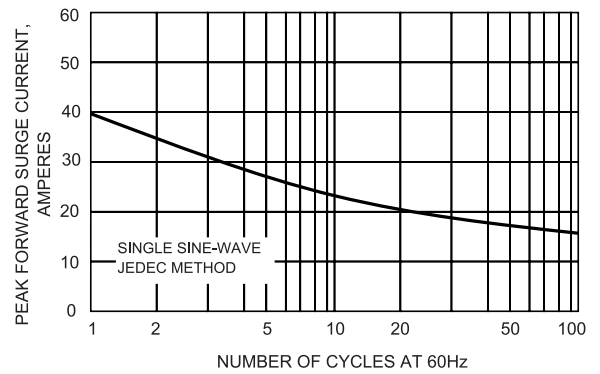


FIG.3-PULSE WAVEFORM

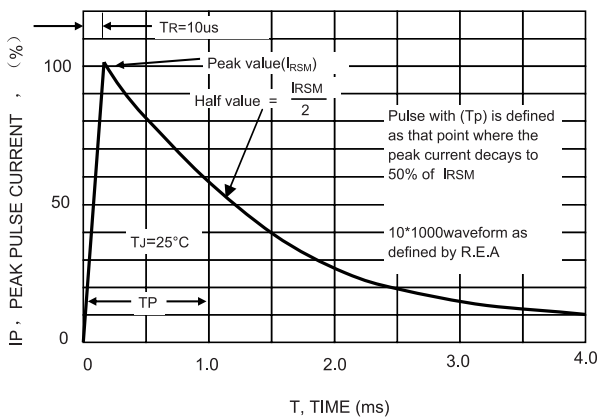


FIG.4-TYPICAL JUNCTION CAPACITANCE

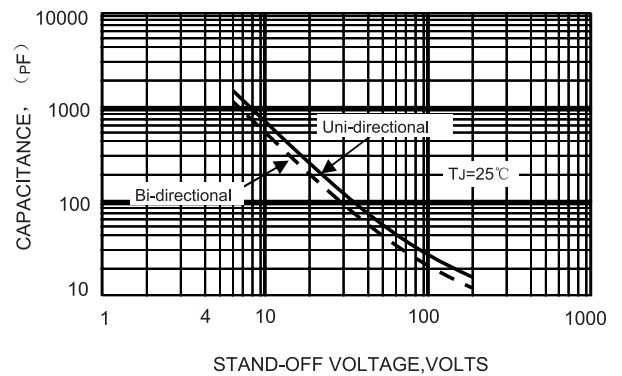


FIG.5-PULSE RATING CURVE


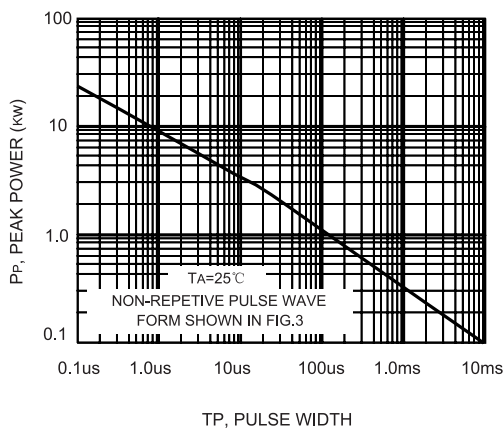



FIG.6-STEADY STATE POWER DERATING CURVE



Unidirectional and Bidirectional Surface Mount Transient Voltage Suppressor

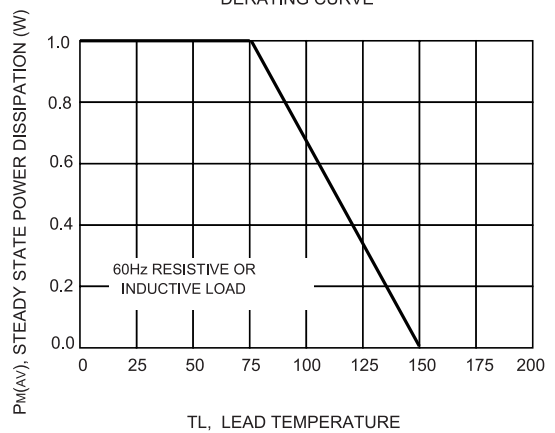

Dimensions:

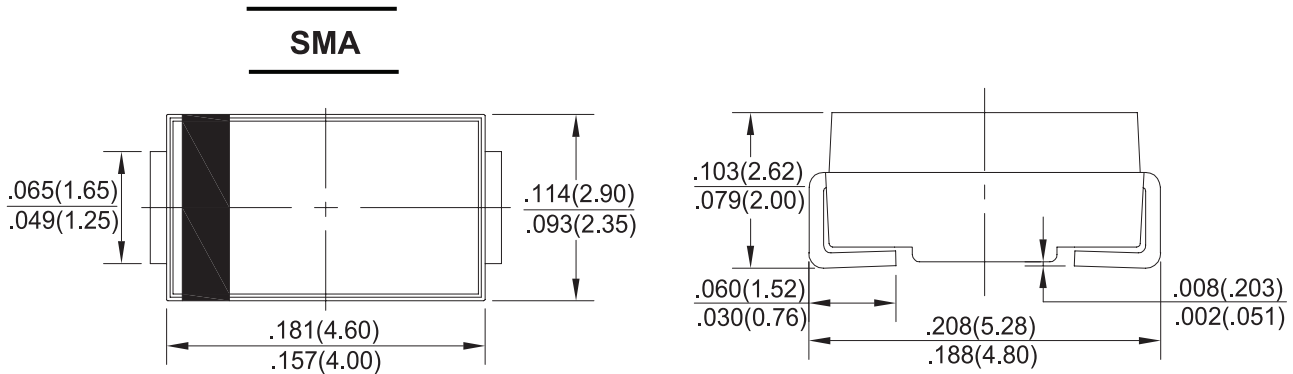

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number	Description	Part Number	Description	Part Number
Surface Mount Unidirectional and Bidirectional Transient Voltage Suppressors	SMAJ10A	Surface Mount Unidirectional and Bidirectional Transient Voltage Suppressors	SMAJ22A	Surface Mount Unidirectional and Bidirectional Transient Voltage Suppressors	SMAJ5.0CA
	SMAJ10CA		SMAJ24A		SMAJ51A
	SMAJ11CA		SMAJ24CA		SMAJ51CA
	SMAJ120A		SMAJ26A		SMAJ54A
	SMAJ12A		SMAJ26CA		SMAJ54CA
	SMAJ12CA		SMAJ28A		SMAJ58A
	SMAJ13A		SMAJ30A		SMAJ58CA
	SMAJ13CA		SMAJ30CA		SMAJ6.0A
	SMAJ150A		SMAJ33A		SMAJ6.5A
	SMAJ150CA		SMAJ33CA		SMAJ60A
	SMAJ15A		SMAJ36A		SMAJ64A
	SMAJ15CA		SMAJ36CA		SMAJ7.0CA
	SMAJ16A		SMAJ40A		SMAJ7.5A
	SMAJ18A		SMAJ40CA		SMAJ8.5A
	SMAJ18CA		SMAJ43CA		SMAJ9.0CA
	SMAJ20A		SMAJ48CA		
SMAJ20CA	SMAJ5.0A				

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

