


NPN Silicon Power Darlington Transistor

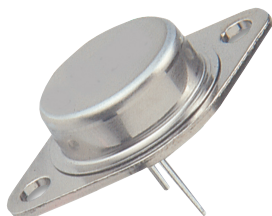


Description

The MJ10004 and MJ10005 darlington transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switch-mode applications.

Features

- Continuous collector current - $I_c = 20A$
- Switching regulators
- Inverters
- Solenoid and relay drivers
- Motor controls




Maximum Ratings

Characteristic	Symbol	MJ10004	MJ10005	Unit
Collector - Emitter Voltage	V_{CEV}	450	500	V
	$V_{CEX(SUS)}$	400	450	
	$V_{CEO(SUS)}$	350	400	
Emitter - Base Voltage	V_{EBO}	8		
Collector Current - Continuous - Peak	I_c	20		A
	I_{CM}	30		
Base Current	I_B	2.5		
Total Power Dissipation @ $T_C = 25^\circ C$ @ $T_C = 100^\circ C$ Derate above $25^\circ C$	P_D	175		W
		100		W
		1		W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200		$^\circ C$

Thermal Characteristics

Characteristic	Symbol	Max.	Unit
Thermal Resistance Junction to case	$R_{\theta jc}$	1	$^\circ C/W$

Figure - 1 Power Derating

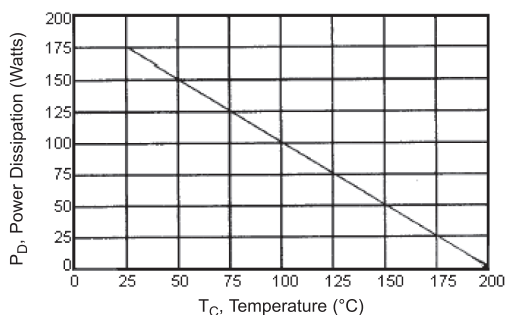

NPN Silicon Power Darlington Transistor

multicomp PRO

Electrical Characteristics (T_c = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
----------------	--------	------	------	------

OFF Characteristics

Collector - Emitter Sustaining Voltage (I _c = 250mA, I _B = 0, V _{clamp} = Rated V _{CEO})	MJ10004 MJ10005	V _{CEO(SUS)}	350 400	-	V
Collector Cutoff Current (V _{CE} = Rated V _{CEV} , R _{BE} = 50Ω, T _c = 100°C)		I _{CER}	-	5.0	mA
Collector Cutoff Current (V _{CEV} = Rated Value, V _{BE(OFF)} = 1.5V) (V _{CEV} = Rated Value, V _{BE(OFF)} = 1.5V, T _c = 100°C)		I _{CEV}	-	0.25 5.0	
Emitter Cutoff Current (V _{EB} = 2.0V, I _c = 0)		I _{EBO}	-	175	

ON Characteristics (1)

DC Current Gain (I _c = 5.0A, V _{CE} = 5.0V) (I _c = 10A, V _{CE} = 5.0V)		h _{FE}	50 40	600 400	-
Collector - Emitter Saturation Voltage (I _c = 10A, I _B = 400mA) (I _c = 20A, I _B = 2.0A) (I _c = 10A, I _B = 400mA, T _c = 100°C)		V _{CE(SAT)}	-	1.9 3.0 2.0	V
Base-Emitter Saturation Voltage (I _c = 10A, I _B = 400mA) (I _c = 10A, I _B = 400mA, T _c = 100°C)		V _{BE(SAT)}	-	2.5 2.5	
Diode Forward Voltage (I _F = 10A)		V _F	-	5.0	

Dynamic Characteristics

Small-Signal Current Gain (2) (I _c = 1.0A, V _{CE} = 10V, f = 1.0MHz)		h _{FE}	10	-	-
Output Capacitance (V _{CB} = 10V, I _E = 0, f = 100KHz)		C _{OB}	100	-	pF

Switching Characteristics

Delay Time	V _{CC} = 250V, I _c = 10A I _{B1} = 400mA, V _{BE(OFF)} = 5.0V t _p = 50μs, Duty Cycle < 2%	t _d	-	0.2	μs
Rise Time		t _r	-	0.6	
Storage Time		t _s	-	1.5	
Fall Time		t _f	-	0.5	

(1) Pulse Test: Pulse Width = 300μs, Duty Cycle < 2.0%.











(2) f_T = |h_{FE}| • f_{TEST}

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro



multicomp PRO

NPN Silicon Power Darlington Transistor

multicomp PRO

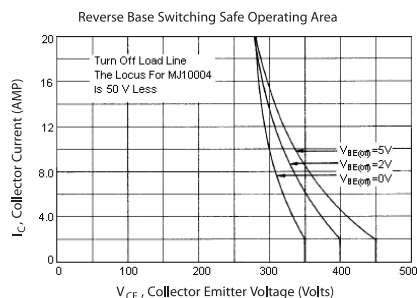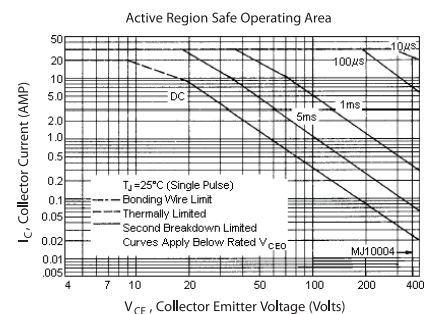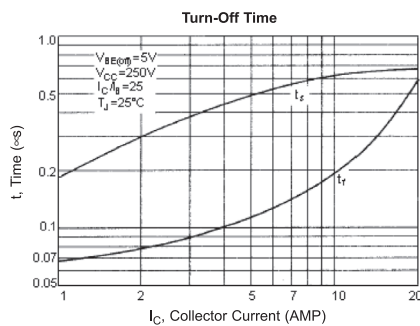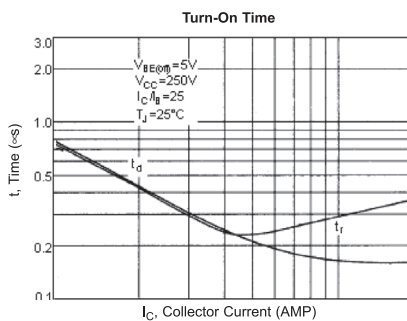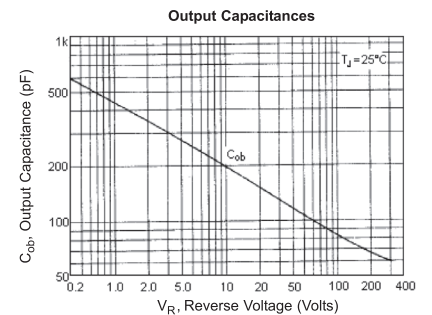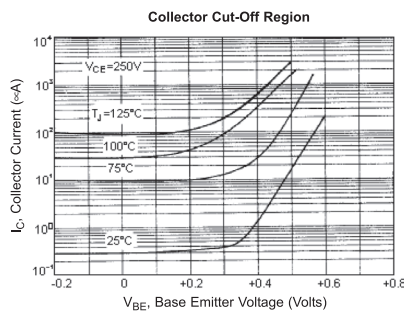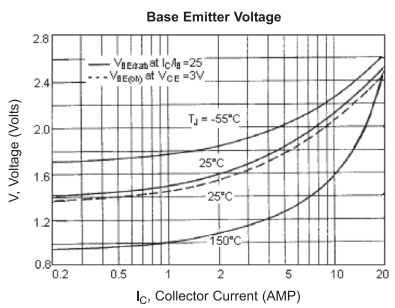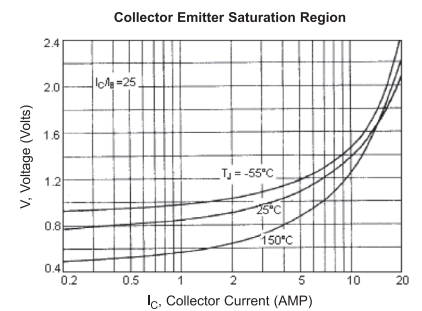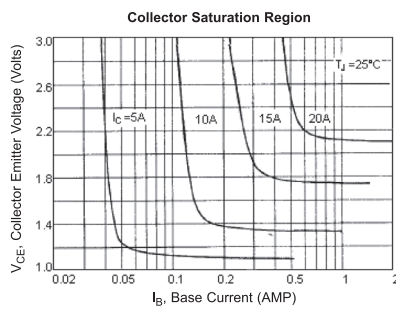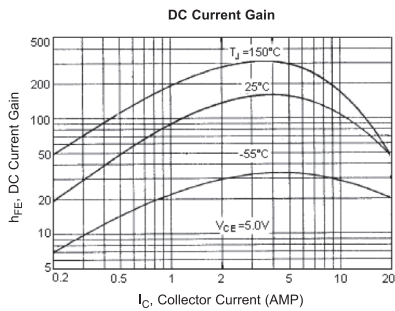

NPN Silicon Power Darlington Transistor

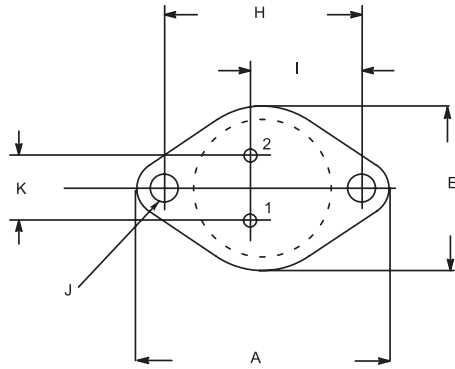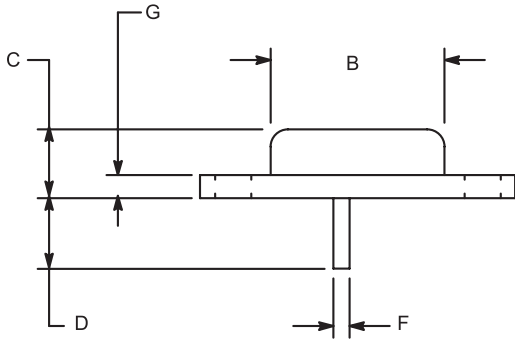

Pin 1. Base
2. Emitter
Collector (Case)

DIM.	Min.	Max.
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18

Dimensions : Millimetres

Part Number Table

Description	Part Number
Darlington Transistor, TO-3	MJ10004
Darlington Transistor, TO-3	MJ10005

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.