

# 8 Ports Industrial Compact Ethernet Switch

**multicomp** PRO

**RoHS  
Compliant**



## 8 Port Unmanaged Ethernet Switch DIN Mountable


### Features

- 5 Port 10/100Mbps Fast Ethernet
- Redundant dual power inputs: +5V to +30V DC
- Compact design with integral DIN mount
- No software required - Simply plug in and connect

### Specifications

Power Consumption	: 1.5 Watts Max : 300m Amps @ +5V DC / 50m Amps @ +30V DC
Power Supply Input	: Unregulated +5 Volts to +30 Volts DC, reverse polarity protection
Isolation	: 1500V <sub>RMS</sub> Magnetic isolation from Ethernet
Operating and Storage Temperature	: -40°C to +80°C / -40°F to +176°F
Ambient Relative Humidity	: 5 to 95% (non-condensing)
Ethernet Ports	: 8 × RJ45 jack, 10/100MHz autosensing, crossover auto sensing (Auto MDIX)
Protection	: 1,500 Volts magnetic isolation between ports
Housing	: IP-20 rated non-conducting polyamide case
Screw Terminals	: 3.5mm pitch, #22 - #14, 0.5mm <sup>2</sup> - 2.5mm <sup>2</sup> pin power supply
Wire Thickness	: 0.15 inch, 3.81mm, 20 pins, 12+8 screw terminals, #26 - #16 AWG, 0.14mm <sup>2</sup> - 1.3mm <sup>2</sup>

### Diagram

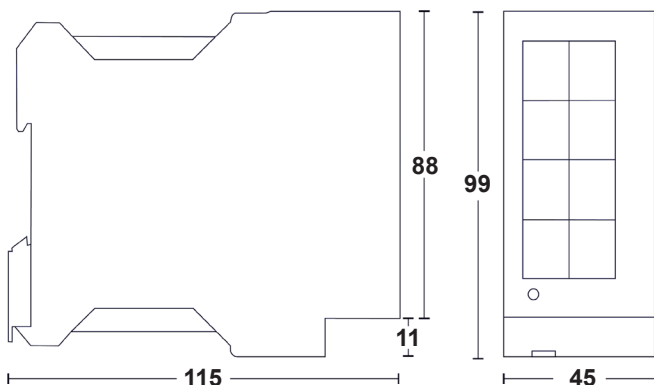

Dimensions : Millimetres

#### Power Terminal Pin Outs

Pin	Function
1	-V
2	+VA
3	+VB
4	-V
5	Functional Earth

#### Ethernet Ports × 4 Pin Outs

PIN	Function
1	RD+ / TD+
2	RD- / TD-
3	TD+ / RD+
4	NC
5	NC
6	TD- / RD-
7	NC
8	NC

### Part Number Table

Description	Part Number
Compact Ethernet Switch, 8 Ports, 10/100Mbps, DIN Rail Mount	MP-508

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro

**multicomp** PRO