

Radial Lead Fuses

Round - Slow Blow

multicomp PRO

**RoHS
Compliant**



Electrical Characteristics

Rated Current	1.5 In	2.1 In	2.75 In		4 In		10 In	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
40mA to 5A	60 Minutes	2 Minutes	400ms	10 seconds	150ms	3ms	20ms	150ms
6.3A to 10A							15ms	

Interrupting Ratings

35 amperes or 10 × rated current; whichever is greater at 250V AC

Environmental Specifications

Operating Temperature	: -55°C to +125°C
Shock	: MIL-STD-202, Method 213, Condition 1 (Saw Tooth)
Vibration	: MIL-STD-202, Method 201 (10-55Hz x 3 axis/No Load)
Salt Spray	: MIL-STD-202, Method 101, Test Condition B (48Hours)
Insulation Resistance	: MIL-STD-202, Method 302, Test Condition A (After Opening) 10,000 ohms minimum
Resistance to Solder Heat	: MIL-STD-202, Method 210, Test Condition F (10 seconds at 260°C)
Thermal Shock	: MIL-STD-202, Method 107, Test Condition B (-65°C to +125°C)

Physical Specifications

Materials

Base and Cap	: Black Thermoplastic
Pin	: Tin-lead Plated Alloy

Specification Table

Ampere Rating (In)	Voltage Rating (V)	Nominal Resistance Cold Ω	Maximum Voltage Drop (mV)	Nominal Melting I ² t A ² Sec	Part Number
160mA	250	1.3	250	0.1331	MCMET 160 mA 250 V
200mA		0.781	250	0.2	MCMET 200 mA 250 V
250mA		0.569	220	0.375	MCMET 250 mA 250 V
315mA		0.406	200	0.5457	MCMET 315 mA 250 V
400mA		0.27	180	1.04	MCMET 400 mA 250 V
500mA		0.177	170	1.25	MCMET 500 mA 250 V

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro


multicomp PRO

Radial Lead Fuses

Round - Slow Blow

Ampere Rating (In)	Voltage Rating (V)	Nominal Resistance Cold Ω	Maximum Voltage Drop (mV)	Nominal Melting I^2t A ² Sec	Part Number
630mA		0.127	160	2.302	MCMET 630 mA 250 V
800mA		0.086	150	3.136	MCMET 800 A 250 V
1A		0.079	140	6.5	MCMET 1 A 250 V
1.25A		0.063	130	12.5	MCMET 1.25 A 250 V
1.6A		0.037	120	18.944	MCMET 1.6 A 250 V
2A		0.03	100	32	MCMET 2 A 250 V
2.5A		0.022		37.5	MCMET 2.5 A 250 V
3.15A		0.017		84.341	MCMET 3.15 A 250 V
4A		0.012		144	MCMET 4 A 250 V

Part Number Explanation

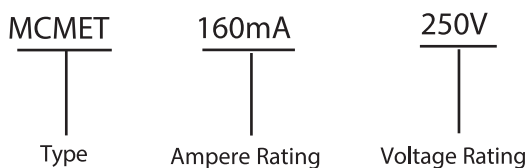

Ampere Rating : 160mA, 200mA, 250mA, 315mA, 400mA, 500mA, 630mA, 800mA, 1A, 1.25A, 1.6A, 2A, 2.5A, 3.15A and 4A

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.