

SMA Male to SMA Male Right Angle Cable Using 402SS Series Coax with Heavy Duty Boot, 3.0 ft



## LCCA30003-FT3

### Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male Right Angle
- Cable Type: 402SS Series

### Features

- Max Frequency 18 GHz
- Shielding Effectivity > 110dB
- 70% Phase Velocity
- Double Shielded
- FEP Jacket
- Wire Braid over Spiral Strip Shield
- Flexible Alternative to .141 Semi-Rigid
- Heavy Duty Heat Shrink Strain Relief Boot
- Precision Stainless Steel Connectors

### Applications

- General Purpose
- Laboratory Use
- Flexible RF Interconnect
- Automated (ATE) Test Systems



### Description

L-com's Cable Assembly LCCA30003 is an SMA male to SMA male right angle, 3.0 ft cable using 402SS Series coax with Heavy Duty Boot that ships same-day. L-com's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This L-com SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible 402SS Series coax and operates to 18 GHz. The right angle SMA interface on the 402SS Series cable allows for easier connections in tight spaces. Highly durable stainless-steel connectors and heavy-duty booting extend the life of this versatile flexible cable assembly. The double shield includes a silver plated copper braid over a silver plated copper spiral strip providing excellent shielding effectiveness greater than 110dB.

Custom versions of this cable assembly along with the rest of L-com's RF cable assemblies can be built and shipped same day. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for custom cable quotes.

SMA Male to SMA Male Right Angle Cable Using 402SS Series Coax with Heavy Duty Boot, 3.0 ft



## LCCA30003-FT3

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
RF Shielding	110			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Input Power (Peak)			550	Watts

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	3	5	10	18		GHz
Insertion Loss (Max.)	0.829	1.079	1.603	2.26		dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as  $0.03 \cdot \sqrt{\text{FGHz}}$  dB for the SMA Male connector and  $0.7 \cdot \sqrt{\text{FGHz}}$  dB for the SMA Male Right Angle connector.

### Mechanical Specifications

#### Cable Assembly

Length	36 in [914.4 mm]
Diameter	0.315 in [8 mm]
Weight	0.18 lbs [81.65 g]

#### Cable

Cable Type	402SS Series
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Tape
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.163 in [4.14 mm]

Repeated Minimum Bend Radius	1 in [25.4 mm]
------------------------------	----------------

SMA Male to SMA Male Right Angle Cable Using 402SS Series Coax with Heavy Duty Boot, 3.0 ft



## LCCA30003-FT3

### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 µin minimum	50 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100 µin minimum
Hex Size	5/16 inch	5/16 inch
Torque	12 in-lbs [1.36 Nm]	12 in-lbs [1.36 Nm]
Boot Material	Heavy Duty Heat Shrink Boot	Heavy Duty Heat Shrink Boot

### Environmental Specifications

#### Temperature

Operating Range -55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

- Values at 25°C, sea level.

SMA Male to SMA Male Right Angle Cable Using 402SS Series Coax with Heavy Duty Boot, 3.0 ft




**LCCA30003-FT3**

**How to Order**

Part Number Configuration:

**LCCA30003 - xx uu**

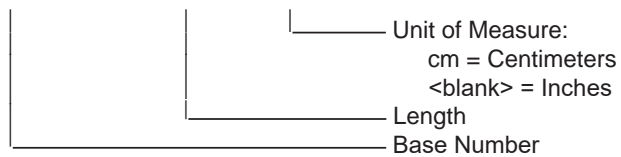

Example: LCCA30003-12 = 12 inches long cable  
LCCA30003-100cm = 100 cm long cable

SMA Male to SMA Male Right Angle Cable Using 402SS Series Coax with Heavy Duty Boot, 3.0 ft from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# SMA Male to SMA Male Right Angle Cable Using 402SS Series Coax with Heavy Duty Boot, 3.0 ft

## L-com CAD Drawing

REVISIONS		DATE	APPROVED
REV.	DESCRIPTION		
A	INITIAL RELEASE	10/09/2019	SELLIS

LENGTH MEASURED FROM CONTACT TO CONTACT

402SS SERIES

2X HEAVY DUTY SHRINK TUBE

SMA MALE

SMA MALE RIGHT ANGLE

WWW.L-COM.COM  
L-COM P/N

(SEE NOTE 1)

**NOTES:**

- CABLES 36" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END, 6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

<p><b>an INFINITE brand</b></p> <p>50 High Street, West Mill, 3rd Floor, Suite #30 North Andover, MA 01845, USA Phone: 1.800.341.5266   1.978.682.6936 Fax: 1.978.689.9484 www.l-com.com   e-mail: CustomerService@l-com.com</p>	<p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> <p>SCALE N/A</p>	<p>SIZE A</p> <p>CAGE CODE 43321</p> <p>DRAWN BY DFRISIELLO</p> <p>PART NUMBER LCCA30003</p> <p>REV A</p>
--	--	---

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;">.X = ±.2</td> <td style="border: none;">[.50]</td> <td style="border: none;">FRACTIONS</td> <td style="border: none;">±.05</td> </tr> <tr> <td style="border: none;">.XX = ±.02</td> <td style="border: none;">[.51]</td> <td style="border: none;">ANGLES ± 1°</td> <td style="border: none;">±.02</td> </tr> <tr> <td style="border: none;">.XXX = ±.005</td> <td style="border: none;">[.13]</td> <td style="border: none;">OVERALL CABLE LENGTH (L) TOLERANCES:</td> <td style="border: none;"></td> </tr> </table> <p style="font-size: small;">L ≤ 12 [305] = ±1 [25] / -0 12 [305] &lt; L ≤ 60 [1524] = ±2 [51] / -0 60 [1524] &lt; L ≤ 120 [3048] = ±4 [102] / -0 120 [3048] &lt; L ≤ 300 [7620] = ±6 [152] / -0 300 [7620] &lt; L = +5%L / -0</p> <p style="font-size: x-small;">ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>	.X = ±.2	[.50]	FRACTIONS	±.05	.XX = ±.02	[.51]	ANGLES ± 1°	±.02	.XXX = ±.005	[.13]	OVERALL CABLE LENGTH (L) TOLERANCES:		<p>1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END, 6.0" FROM THE FRONT OF THE CONNECTOR.</p> <p>THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.</p>
.X = ±.2	[.50]	FRACTIONS	±.05										
.XX = ±.02	[.51]	ANGLES ± 1°	±.02										
.XXX = ±.005	[.13]	OVERALL CABLE LENGTH (L) TOLERANCES:											