

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Plug-in relay interface for protection against interference on the control side, with soldered-in miniature switching relay, contacts (AgNi): Medium to large loads, 1 PDT, 230 V AC input voltage

### Your advantages

- ☑ Resistant to interference currents
- Applications with long control lines



## **Key Commercial Data**

Packing unit	10 pc		
GTIN	4 017918 078577		
GTIN	4017918078577		
Weight per Piece (excluding packing)	41.400 g		
Custom tariff number	85364900		
Country of origin	Germany		
Note	Made to Order (non-returnable)		

### Technical data

### **Dimensions**

Width	20.8 mm
Height	42.5 mm
Depth	112 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C 50 °C
Ambient temperature (storage/transport)	-20 °C 70 °C

#### Coil side



## Technical data

### Coil side

Nominal input voltage U <sub>N</sub>	230 V AC			
Input voltage range in reference to U <sub>N</sub>	0.9 1.1			
Typical input current at U <sub>N</sub>	18 mA AC			
Typical response time	10 ms			
Typical release time	8 ms			
Protective circuit	Bridge rectifier Bridge rectifier			
	Surge protection Varistor			
	RC element RC element			
Operating voltage display	Yellow LED			
Power dissipation for nominal condition	4.14 W			

### Contact side

Contact type	Single contact, 1-PDT		
Type of switch contact	Single contact		
Contact material  Maximum switching voltage	AgNi		
	250 V AC/DC		
Maximum inrush current	8 A		
Limiting continuous current	6 A		
Interrupting rating (ohmic load) max.	95 W (at 24 V DC)		
	50 W (at 48 V DC)		
	45 W (at 60 V DC)		
	35 W (at 110 V DC)		
	55 W (at 220 V DC)		
	2000 VA (for 250 V AC)		

#### General

Test voltage relay winding/relay contact 2.5 kV AC (50 Hz, 1 min.)			
Mechanical service life	approx. 2x 10 <sup>7</sup> cycles		
Mounting position	any		

## Standards and Regulations

Standards/regulations	IEC 60664		
	EN 50178		
Insulation	Basic insulation		
Pollution degree	2		
Overvoltage category	III		


## **Environmental Product Compliance**

	Lead 7439-92-1			
China RoHS	Environmentally Friendly Use Period = 50			
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"			



## Drawings



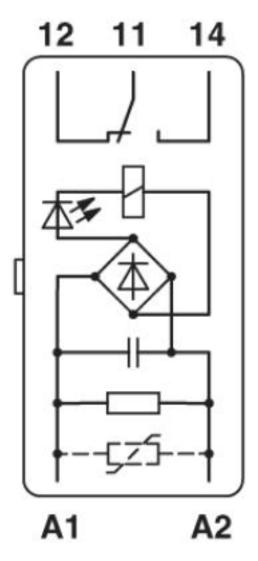

## Classifications

## eCl@ss

eCl@ss 4.0	27371100
eCl@ss 4.1	27371100
eCl@ss 5.0	27371600
eCl@ss 5.1	27371600
eCl@ss 6.0	27371600
eCl@ss 7.0	27371601
eCl@ss 8.0	27371601
eCl@ss 9.0	27371601



## Classifications

### **ETIM**

ETIM 2.0	EC001437
ETIM 3.0	EC001437
ETIM 4.0	EC001437
ETIM 5.0	EC001437
ETIM 6.0	EC001437
ETIM 7.0	EC001437

### UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515
UNSPSC 13.2	39122334
UNSPSC 18.0	39122334
UNSPSC 19.0	39122334
UNSPSC 20.0	39122334
UNSPSC 21.0	39122334

## Approvals

Α	n	nı	'n	v	al	s
, v	$\sim$	$\sim$	•	٧,	u	J

Approvals

EAC / EAC

Ex Approvals

### Approval details

EAC	EAC	TR_TS_D_00573_c
-----	-----	-----------------

EAC	EAC	RU*C- DE.*08.B.00010
-----	-----	-------------------------

### Accessories

Additional products



### Accessories

Basic terminal block - URELG 3-PMTK - 2820709



Basic termination blocks with test connection on both sides and knife disconnection for NS 32 and NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 3-pos.

Basic terminal block - UDK-RELG 3 - 2777043



Basic termination blocks with test connection on both sides and double connections with the same potential for NS 32 and NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 3-pos.

Basic terminal block - URELG 3 - 2820136



Basic termination blocks with screw connection for NS 32 and NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 3-pos.

Basic terminal block - ZFK-RELG 3 - 2829917



Basic termination blocks with spring-cage connection for NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 3-pos.

Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com