



# 42 mm sq.

1.8°/step RoHS

Bipolar winding, Connector type  
Unipolar winding, Connector type ▶ p. 45

## Customizing

Shaft length Shaft shape

Varies depending on the model number and quantity. Contact us for details.


### Bipolar winding, Connector type

Model no.		Holding torque at 2-phase energization	Rated current	Wiring resistance	Winding inductance	Rotor inertia	Mass	Motor length (L)
Single shaft	Dual shaft	N·m min.	A/phase	Ω/phase	mH/phase	×10 <sup>-4</sup> kg·m <sup>2</sup>	kg	mm
<b>SF2421-10B41</b>	<b>SF2421-10B11</b>	0.29	1	3.6	7	0.031	0.23	33±0.5
<b>SF2422-10B41</b>	<b>SF2422-10B11</b>	0.43	1	4.6	9.6	0.046	0.3	39±0.5
<b>SF2423-10B41</b>	<b>SF2423-10B11</b>	0.56	1	5.3	12.5	0.063	0.38	48±0.5
<b>SF2424-10B41</b>	<b>SF2424-10B11</b>	0.8	1	6.5	16	0.094	0.51	59.5±1

### Characteristics diagram


#### SF2421-10B41 SF2421-10B11

Constant current circuit  
Source voltage: 24 VDC  
Operating current:  
1 A/phase, 2-phase  
energization (full-step)  
Pull-out torque:  
 $J=0.94 \times 10^{-4} \text{ kg}\cdot\text{m}^2$  (use the  
rubber coupling)  
fs: Maximum self-start  
frequency when not  
loaded

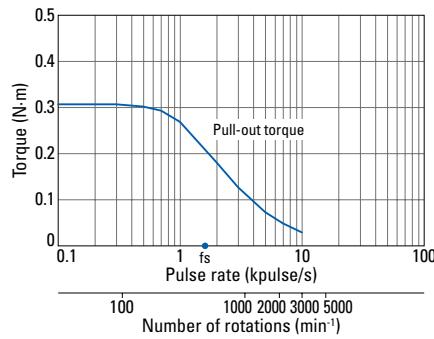


#### SF2422-10B41 SF2422-10B11

Constant current circuit  
Source voltage: 24 VDC  
Operating current:  
1 A/phase, 2-phase  
energization (full-step)  
Pull-out torque:  
 $J=0.94 \times 10^{-4} \text{ kg}\cdot\text{m}^2$  (use the  
rubber coupling)  
fs: Maximum self-start  
frequency when not  
loaded

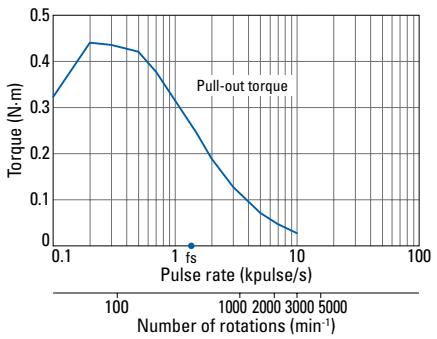


#### SF2423-10B41 SF2423-10B11


Constant current circuit  
Source voltage: 24 VDC  
Operating current:  
1 A/phase, 2-phase  
energization (full-step)  
Pull-out torque:  
 $J=0.94 \times 10^{-4} \text{ kg}\cdot\text{m}^2$  (use the  
rubber coupling)  
fs: Maximum self-start  
frequency when not  
loaded

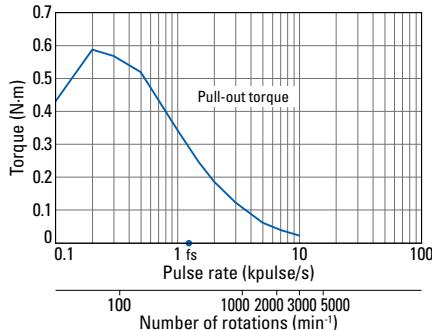

#### SF2424-10B41 SF2424-10B11

Constant current circuit  
Source voltage: 24 VDC  
Operating current:  
1 A/phase, 2-phase  
energization (full-step)  
Pull-out torque:  
 $J=2.6 \times 10^{-4} \text{ kg}\cdot\text{m}^2$  (use the  
rubber coupling)  
fs: Maximum self-start  
frequency when not  
loaded

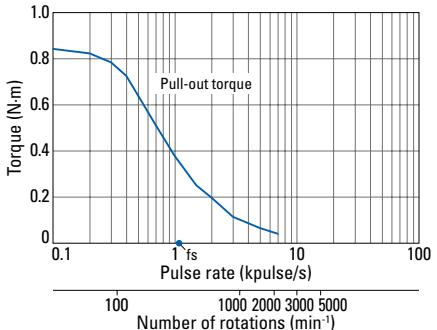

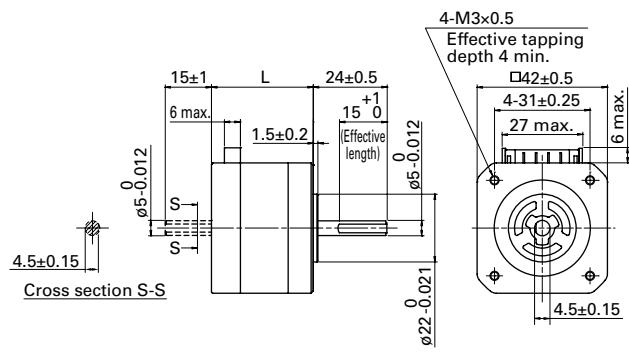
**Dimensions** (Unit: mm)

Option (sold separately): Motor cable model no. 4835775-1


Manufacturer: J.S.T.

Housing: PHR-11

Pin: SPH-002T-P0.5S

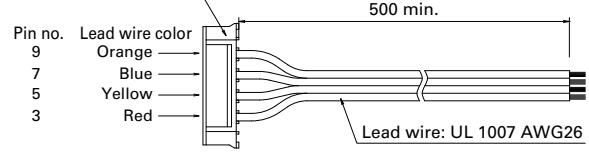

This motor cable is for model no. SF242□-10B□1.


**Internal wiring** ( ) connector pin number**Compatible drivers**

Model no.: BS1D200P10

Operating current select switch setting: A

*The characteristics diagram shown above is from our experimental circuit.*

## Allowable Radial/Thrust Load

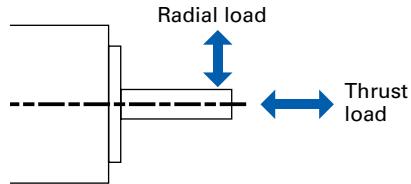

Motor size	Model no.	Distance from end of shaft: mm				Thrust load N
		0	5	10	15	
		Radial load: N				
<b>14 mm sq.</b>	SH214 <input type="checkbox"/>	10	11	13	—	0.7
<b>28 mm sq.</b>	SH228 <input type="checkbox"/>	42	48	56	66	3
<b>35 mm sq.</b>	SH353 <input type="checkbox"/>	40	50	67	98	10
<b>42 mm sq.</b>	SF242 <input type="checkbox"/>	20	29	49	68	10
	SH142 <input type="checkbox"/>	22	26	33	46	
	SS242 <input type="checkbox"/>	10	—	—	—	4.9
<b>50 mm sq.</b>	103H670 <input type="checkbox"/>	71	87	115	167	15
	SS250 <input type="checkbox"/>	8.5	—	—	—	4.9
<b>56 mm sq.</b>	103H712 <input type="checkbox"/>	52	65	85	123	15
	103H7128	85	105	138	200	15
<b>60 mm sq.</b>	103H782 <input type="checkbox"/>	70	87	114	165	20
	SH160 <input type="checkbox"/>					15
<b>86 mm</b>	SM286 <input type="checkbox"/>	167	193	229	280	60
	SH286 <input type="checkbox"/>					
<b>*106 mm</b>	103H822 <input type="checkbox"/>	191	234	301	421	60
	103H8922 <input type="checkbox"/>	321	356	401	457	100


# Internal Wiring and Rotation Direction

## Unipolar winding

Connector type model no.: SF242 □

### Internal wire connection


( ) connector pin number



Connector type model no.: 103H782 □□


### Internal wire connection

( ) connector pin number



Lead wire type

### Internal wire connection



### Direction of motor rotation

When excited by a direct current in the order shown below, the direction of rotation is clockwise as viewed from the output shaft side.

	Connector pin no.				
	(3, 9)	(1)	(7)	(5)	(11)
Exciting order	1	+	-	-	
	2	+	-	-	
	3	+		-	-
	4	+	-		-

### Direction of motor rotation

When excited by a direct current in the order shown below, the direction of rotation is clockwise as viewed from the output shaft side.


	Connector pin no.				
	(1, 6)	(4)	(3)	(5)	(2)
Exciting order	1	+	-	-	
	2	+		-	-
	3	+		-	-
	4	+	-		-

## Bipolar winding

Connector type model no.: SF242 □

### Internal wire connection

( ) connector pin number



### Direction of motor rotation


When excited by a direct current in the order shown below, the direction of rotation is clockwise as viewed from the output shaft side.

	Connector pin no.				
	(3)	(7)	(5)	(9)	
Exciting order	1	-	-	+	+
	2	+	-	-	+
	3	+	+	-	-
	4	-	+	+	-

Connector type model no.: 103H782 □

### Internal wire connection

( ) connector pin number



### Direction of motor rotation


When excited by a direct current in the order shown below, the direction of rotation is clockwise as viewed from the output shaft side.

	Connector pin no.				
	(3)	(2)	(4)	(1)	
Exciting order	1	-	-	+	+
	2	+	-	-	+
	3	+	+	-	-
	4	-	+	+	-

Lead wire type

### Internal wire connection

Orange, Blue



### Direction of motor rotation

When excited by a direct current in the order shown below, the direction of rotation is clockwise as viewed from the output shaft side.

	Lead wire color				
	Red	Blue	Yellow	Orange	
Exciting order	1	-	-	+	+
	2	+	-	-	+
	3	+	+	-	-
	4	-	+	+	-

# General Specifications

Motor model no.	SH214 <input type="checkbox"/>	SH228 <input type="checkbox"/>	SH353 <input type="checkbox"/>	SS242 <input type="checkbox"/>	SH142 <input type="checkbox"/>	SF242 <input type="checkbox"/>	SS250 <input type="checkbox"/>	103H670 <input type="checkbox"/>	103H712 <input type="checkbox"/>
Type	—								
Operating ambient temperature	-10 to +50°C								
Storage temperature	-20 to +65°C								
Operating ambient humidity	20 to 90% RH (no condensation)								
Storage humidity	5 to 95% RH (no condensation)								
Operation altitude	1000 m max. above sea level								
Vibration resistance	Vibration frequency 10 to 500 Hz, total amplitude 1.52 mm (10 to 70 Hz), vibration acceleration 150 m/s <sup>2</sup> (70 to 500 Hz), sweep time 15 min/cycle, 12 sweeps in each X, Y and Z direction.								
Impact resistance	500 m/s <sup>2</sup> of acceleration for 11 ms with half-sine wave applying three times for X, Y, and Z axes each, 18 times in total.								
Thermal class	Class B (+130°C)								
Withstandable voltage	At normal temperature and humidity, no failure with 500 VAC @50/60 Hz applied for one minute between motor winding and frame.								At normal temperature and humidity, no failure with 1000 VAC @50/60 Hz applied for one minute between motor winding and frame.
Insulation resistance	At normal temperature and humidity, not less than 100 MΩ between winding and frame by 500 VDC megger.								
Protection grade	—								
Winding temperature rise	80 K max. (Based on SANYO DENKI standard)								
Static angle error	±0.09°				±0.054°	±0.09°			±0.054°
Thrust play *1	0.075 mm max. (load: 0.35 N)	0.075 mm max. (load: 1.5 N)	0.075 mm max. (load: 5 N)	0.075 mm max. (load: 4 N)	0.075 mm max. (load: 5 N)	0.075 mm max. (load: 5 N)	0.075 mm max. (load: 4 N)	0.075 mm max. (load: 10 N)	0.075 mm max. (load: 10 N)
Radial play *2	0.025 mm max. (load: 5 N)								
Shaft runout	0.025 mm								
Concentricity of mounting pilot relative to shaft	ø0.05 mm	ø0.05 mm	ø0.075 mm	ø0.075 mm	ø0.05 mm	ø0.05 mm	ø0.075 mm	ø0.075 mm	ø0.075 mm
Squareness of mounting surface relative to shaft	0.1 mm	0.1 mm	0.1 mm	0.1 mm	0.1 mm	0.1 mm	0.1 mm	0.075 mm	0.075 mm
Direction of motor mounting	Can be freely mounted vertically or horizontally								

Motor model no.	SH160 <input type="checkbox"/>	103H782 <input type="checkbox"/>	SH286 <input type="checkbox"/>	103H8922 <input type="checkbox"/>	SM286 <input type="checkbox"/>	103H712 <input type="checkbox"/> -6 <input type="checkbox"/> 0	103H822 <input type="checkbox"/> -6 <input type="checkbox"/> 0	103H8922 <input type="checkbox"/> -63 <input type="checkbox"/> 1	CE Model
Type	—					S1 (continuous operation)			
Operating ambient temperature	-10 to +50°C					-10 to +40°C			
Storage temperature	-20 to +65°C					-20 to +60°C			
Operating ambient humidity	20 to 90% RH (no condensation)					95% RH max. at 40°C or less (no condensation)			
Storage humidity	5 to 95% RH (no condensation)					95% RH max. at 40°C or less, 57% RH max. at 50°C or less, 35% RH max. at 60°C or less (no condensation)			
Operation altitude	1000 m max. above sea level								
Vibration resistance	Vibration frequency 10 to 500 Hz, total amplitude 1.52 mm (10 to 70 Hz), vibration acceleration 150 m/s <sup>2</sup> (70 to 500 Hz), sweep time 15 min/cycle, 12 sweeps in each X, Y and Z direction.								
Impact resistance	500 m/s <sup>2</sup> of acceleration for 11 ms with half-sine wave applying three times for X, Y and Z axes each, 18 times in total.								
Thermal class	Class B (+130°C)				Class F (+155°C)	Class B (+130°C)			
Withstandable voltage	At normal temperature and humidity, no failure with 1000 VAC @50/60 Hz applied for one minute between motor winding and frame.				At normal temperature and humidity, no failure with 1500 VAC @50/60 Hz applied for one minute between motor winding and frame.				
Insulation resistance	At normal temperature and humidity, not less than 100 MΩ between winding and frame by 500 VDC megger.								
Protection grade	—				IP43				
Winding temperature rise	80 K max. (Based on SANYO DENKI standard)								
Static angle error	±0.054°	±0.09°			±0.054°	±0.09°			
Thrust play *1	0.075 mm max. (load: 10 N)								
Radial play *2	0.025 mm (load: 5 N)	0.025 mm (load: 5 N)	0.025 mm (load: 5 N)	0.025 mm (load: 10 N)	0.025 mm (load: 5 N)	0.025 mm (load: 5 N)	0.025 mm (load: 5 N)	0.025 mm (load: 10 N)	
Shaft runout	0.025 mm								
Concentricity of mounting pilot relative to shaft	ø0.075 mm								
Squareness of mounting surface relative to shaft	0.1 mm	0.075 mm	0.15 mm	0.1 mm	0.15 mm	0.075 mm	0.1 mm	0.1 mm	
Direction of motor mounting	Can be freely mounted vertically or horizontally								

\*1 Thrust play: Shaft displacement under axial load.

\*2 Radial play: Shaft displacement under radial load applied 1/3rd of the length from the end of the shaft.

## Safety standards

Model no.: SM286  CE/UL marked models

CE (TÜV)	Standard category	Applicable standard
	Low-voltage directives	EN 60034-1, EN 60034-5
UL	Acquired standards	File no.
	UL	UL 1004-1, UL 1004-6
	UL for Canada	E179832
CSA C22.2 No.100		

Model no.: 103H712  -6  0, 103H822  -6  0, 103H8922  -63  1 CE marked model

CE (TÜV)	Standard category	Applicable standard
	Low-voltage directives	EN 60034-1, EN 60034-5