


MCF 2W Series

Carbon Film Resistors



Features:

- Automatically insertable.
- High quality performance.
- Non-flame type available.
- Cost effective and commonly used.
- Too low or too high values can be supplied on a case to case basis.

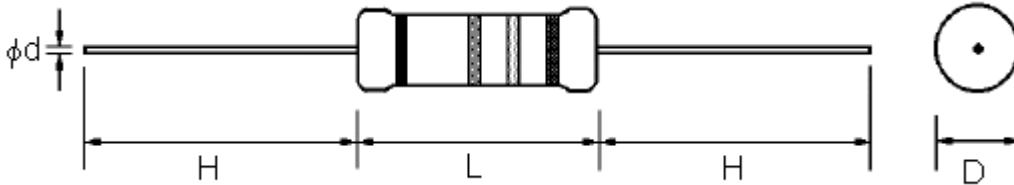

Performance Specifications:

Temperature coefficient	: $\pm 350\text{PPM}/^\circ\text{C}$ for $\leq 10\Omega$ $\pm 450\text{PPM}/^\circ\text{C}$ for $11\Omega - 99\text{K}\Omega$ $0 \sim -700\text{PPM}/^\circ\text{C}$ for $100\text{K}\Omega \sim 1\text{M}\Omega$ $0 \sim -1500\text{PPM}/^\circ\text{C}$ for $1.1\text{M}\Omega \sim 10\text{M}\Omega$.
Short-time overload	: $\Delta R/R \leq \pm(1.0\% + 0.05\Omega)$, with no evidence of mechanical damage.
Minimum insulation resistance	: 10,000 Megaohm.
Dielectric withstanding voltage	: No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Terminal strength	: No evidence of mechanical damage.
Resistance to soldering heat	: $\Delta R/R \leq \pm(1.0\% + 0.05\Omega)$, with no evidence of mechanical damage.
Minimum solderability	: 95% coverage.
Resistance to solvent	: No deterioration of protective coating and markings.
Temperature cycling	: $\Delta R/R \leq \pm(1.0\% + 0.05\Omega)$, with no evidence of mechanical damage.
Load life in humidity	: Normal type : $\Delta R/R \pm 3\%$ for $< 100\text{K}\Omega$, $\pm 5\%$ for $\geq 100\text{K}\Omega$ Non-flame type : $\Delta R/R \pm 5\%$ for $< 100\text{K}\Omega$, $\pm 10\%$ for $\geq 100\text{K}\Omega$.
Load life	: Normal type : $\Delta R/R \pm 2\%$ for $< 56\text{K}\Omega$, $\pm 3\%$ for $\geq 56\text{K}\Omega$ Non-flame type : $\Delta R/R \pm 5\%$ for $< 100\text{K}\Omega$, $\pm 10\%$ for $\geq 100\text{K}\Omega$.
Operating temperature	: -55°C to $+155^\circ\text{C}$.

Specification Table

Series	Power Rating at 70°C (W)	Dimension				Maximum Working Voltage (V)	Maximum Overload Voltage (V)	Dielectric Withstanding Voltage (V)	Resistance Range
		Maximum Diameter (D)	Maximum Length (L)	Height (H ± 3)	Lead Diameter (d ± 0.05)				
MCF 2W	2	5.5	16	28	0.7	500	1000	1000	$1\Omega \sim 10\text{M}\Omega$

Note: Standard E - 24 series values in $\pm 5\%$ tolerance.

Dimensions : Millimetres




MCF 2W Series


Carbon Film Resistors




Derating Curve

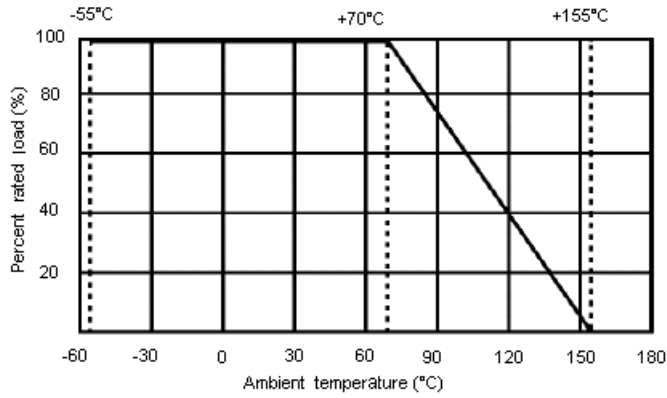

Current Noise

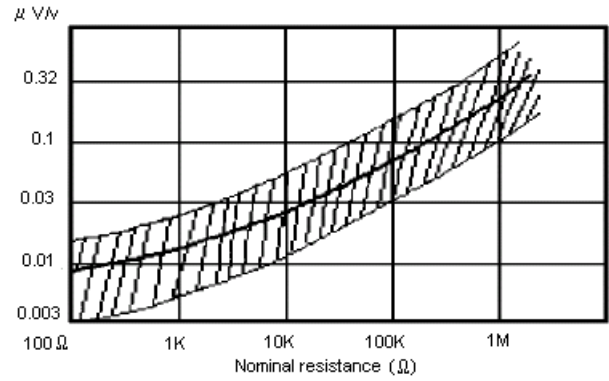

Temperature Coefficient

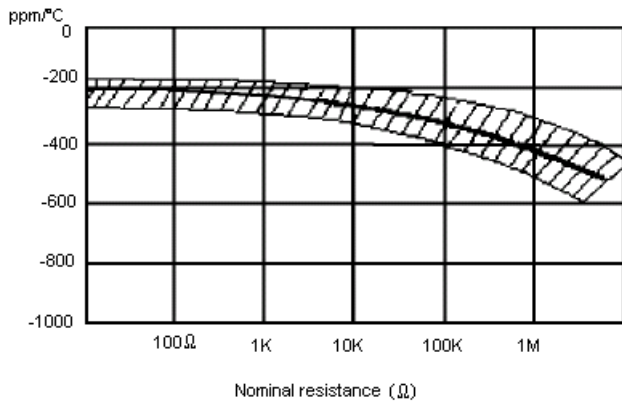

MCF 2W Series

Carbon Film Resistors



Resistance Preferred Value Range

E6	E12	E24	E96	E6	E12	E24	E96	E6	E12	E24	E96
10	10	10	10.0				21.5				46.4
			10.2	22	22	22	22.1	47	47	47	47.5
			10.5				22.6				48.7
			10.7				23.2				49.9
		11	11.0				23.7			51	51.1
			11.3			24	24.3				52.3
			11.5				24.9				53.6
			11.8				25.5				54.9
	12	12	12.1				26.1		56	56	56.2
			12.4				27.7				57.6
			12.7		27	27	27.4				59.0
		13	13.0				28.0				60.4
			13.3				28.7			62	61.9
			13.7				29.4				63.4
			14.0			30	30.1				64.9
			14.3				30.9				66.5
			14.7				31.6	68	68	68	68.1
15	15	15	15.0				32.4				69.8
			15.4	33	33	33	33.2				71.5
			15.8				34.0				73.2
		16	16.2				34.8			75	75.0
			16.5				35.7				76.8
			16.9			36	36.5				78.7
			17.4				37.4				80.6
			17.8				38.3		82	82	82.5
	18	18	18.2		39	39	39.2				84.5
			18.7				40.2				86.6
			19.1				41.2				88.7
			19.6				42.2			91	90.9
		20	20.0			43	43.2				93.1
			20.5				44.2				95.3
			21.0				45.3				97.6

Above values in accordance with IEC Publication 63 (1963) and BS2488



MCF 2W Series

Carbon Film Resistors



Part Number


Resistance Value	Part Number
10R	MCF 2W 10R
100R	MCF 2W 100R
1K	MCF 2W 1K
10K	MCF 2W 10K
100K	MCF 2W 100K
1M	MCF 2W 1M
15R	MCF 2W 15R
150R	MCF 2W 150R
1K5	MCF 2W 1K5
15K	MCF 2W 15K
150K	MCF 2W 150K
22R	MCF 2W 22R
220R	MCF 2W 220R
2K2	MCF 2W 2K2
22K	MCF 2W 22K
220K	MCF 2W 220K
33R	MCF 2W 33R
330R	MCF 2W 330R
3K3	MCF 2W 3K3
33K	MCF 2W 33K
330K	MCF 2W 330K
47R	MCF 2W 47R
470R	MCF 2W 470R
4K7	MCF 2W 4K7
47K	MCF 2W 47K
470K	MCF 2W 470K
68R	MCF 2W 68R
680R	MCF 2W 680R
6K8	MCF 2W 6K8
68K	MCF 2W 68K
680K	MCF 2W 680K

MCF 2W Series

Carbon Film Resistors



Part Number Explanation

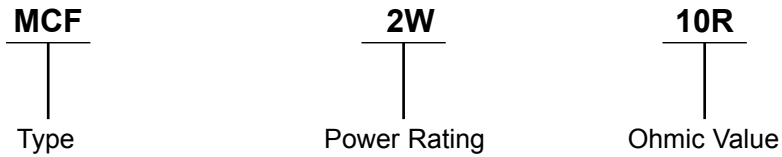

Ohmic Value : Where R = Ohms = Ω
K = Kiloohms = $K\Omega$
M = Meghaohms = $M\Omega$
And replaces the decimal point.
eg: 1R5 = 1.5Ω
4K7 = $4.7K\Omega$
6M8 = $6.8M\Omega$.

Stocked Values

Tolerance	Wattage (W)	Preferred Value Range	Range Value
5%	2	E24	1R - 10M



MCF 2W Series

Carbon Film Resistors



Notes:

International Sales Offices:



AUSTRALIA – Farnell InOne
Tel No: ++ 61 2 9645 8888
Fax No: ++ 61 2 9644 7898



FINLAND – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



NETHERLANDS – Farnell InOne
Tel No: ++ 31 30 241 7373
Fax No: ++ 31 30 241 7333



SWITZERLAND – Farnell InOne
Tel No: ++ 41 1 204 64 64
Fax No: ++ 41 1 204 64 54



AUSTRIA – Farnell InOne
Tel No: ++ 43 662 2180 680
Fax No: ++ 43 662 2180 670



FRANCE – Farnell InOne
Tel No: ++ 33 474 68 99 99
Fax No: ++ 33 474 68 99 90



NEW ZEALAND – Farnell InOne
Tel No: ++ 64 9 357 0646
Fax No: ++ 64 9 357 0656



UK – Farnell InOne
Tel No: ++ 44 8701 200 200
Fax No: ++ 44 8701 200 201



BELGIUM – Farnell InOne
Tel No: ++ 32 3 475 2810
Fax No: ++ 32 3 227 3648



GERMANY – Farnell InOne
Tel No: ++ 49 89 61 39 39 39
Fax No: ++ 49 89 613 59 01



NORWAY – Farnell InOne
Tel No: ++ 45 44 53 66 66
Fax No: ++ 45 44 53 66 02



UK – BuckHickman InOne
++ 44 8450 510 150
++ 44 8450 510 130



BRAZIL – Farnell-Newark InOne
Tel No: ++ 55 11 4066 9400
Fax No: ++ 55 11 4066 9410



HONG KONG – Farnell-Newark InOne
Tel No: ++ 852 2268 9888
Fax No: ++ 852 2268 9899



PORTUGAL – Farnell InOne
Tel No: ++ 34 93 475 8804
Fax No: ++ 34 93 474 5288



UK – CPC
++ 44 8701 202 530
++ 44 8701 202 531



CHINA – Farnell-Newark InOne
Tel No: ++86 10 6238 5152
Fax No: ++86 10 6238 5022



IRELAND – Farnell InOne
Tel No: ++ 353 1 830 9277
Fax No: ++ 353 1 830 9016



SINGAPORE – Farnell-Newark InOne
Tel No: ++ 65 6788 0200
Fax No: ++ 65 6788 0300



EXPORT – Farnell InOne
Tel No: ++ 44 8701 200 208
Fax No: ++ 44 8701 200 209

For enquiries from all other markets



DENMARK – Farnell InOne
Tel No: ++ 45 44 53 66 44
Fax No: ++ 45 44 53 66 06



ITALY – Farnell InOne
Tel No: ++ 39 02 93 995 200
Fax No: ++ 39 02 93 995 300



SPAIN – Farnell InOne
Tel No: ++ 34 93 475 8805
Fax No: ++ 34 93 474 5107



ESTONIA – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



MALAYSIA – Farnell-Newark InOne
Tel No: ++ 60 3 7873 8000
Fax No: ++ 60 3 7873 7000



SWEDEN – Farnell InOne
Tel No: ++ 46 8 730 50 00
Fax No: ++ 46 8 83 52 62

<http://www.farnellinone.com>

<http://www.buckhickmaninone.com>

<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2004.

