RF Cable Assembly

multicomp PRO


RoHS Compliant

Specifications:

Electrical Performance:

Impedance	: 50Ω
Frequency Range	: DC - 3GHz
Working Voltage	: 60Vrms Max.
Dielectric Withstanding Voltage	: 200Vrms Min.
Insulator Resistance	: 500MΩ Min.

Diagram

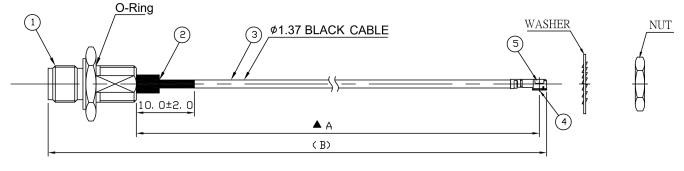



- 1. IP67 RPSMA (rear lock) B/H Jack for OD1.37mm Cable (Nut × 1 ,Washer × 1)
- 2. Heat Shrink Tube F32 OD2.5mm L = 10mm Colour : Black
- 3. OD1.37mm Tin Plated Cable Black Jacket
- 4. U.FL-LP-088 Halogen Free Shell for ø1.37mm Cable
- MOUNTING HOLE
- 5. U.FL-LP-088 Contact for ø1.37mm Cable

Part Number Table

Description	Product Length A	Product Length B	VSWR	Insertion Loss	Part Number
IP67 RPSMA (rear lock) B/H - U.FL100mm	100mm	116.5mm	1.4:1 Max.	-0.7dB Max.	MC000798
IP67 RPSMA (rear lock) B/H - U.FL150mm	150mm	216.5mm	1.4:1 Max.	-0.9dB Max.	MC000799
IP67 RPSMA (rear lock) B/H - U.FL200mm	200mm	316.5mm	1.4:1 Max.	-1.0dB Max.	MC000800

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

