

Data sheet | Item number: 870-403

Push-in type jumper bar; insulated; 3-way; Nominal current 18 A; light gray

www.wago.com/870-403



Data

Electrical data

Ratings per IEC/EN 60664-1

Rated current	18 A
---------------	------

Approvals Ex

Rated current (Ex e II)	13.5 A
-------------------------	--------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Geometrical Data

Width	14 mm / 0.551 inch
Depth	2,5 mm / 0.098 inch

Material Data

Color	light gray
Fire load	0.016 MJ
Weight	1.3 g

Commercial data

Product Group	16 (Rail Mounted Terminal Block with CCC)
Packaging type	BOX
Country of origin	DE
GTIN	4044918507264
Customs tariff number	85366990990

Counterpart

Downloads

Documentation

Bid Text

870-403 doc - Datei	Jan 4, 2018	doc 24.1 kB	Download
870-403 GAEB X81 - Datei	Feb 19, 2019	xml 2.6 kB	Download

Additional Information

Technical explanations	Apr 3, 2019	pdf 2.1 MB	Download
------------------------	-------------	---------------	----------

CAD/CAE-Data

CAD data

2D/3D Models 870-403	URL	Download
----------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

CAE data



WSCAD Universe 870-403

URL

Download

Handling Instructions

Jumpered

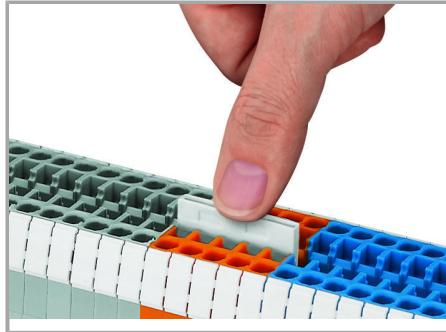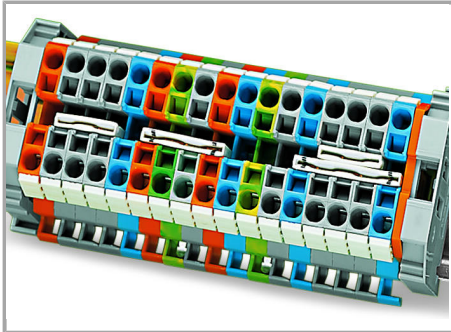

Commoning with push-in type jumper bars:

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Two parallel jumper slots are accommodated in one terminal block.

Push-in type jumper bars 1 – 3 – 5 – 7 or
1 – – 4 – – 7

upon request

Subject to changes. Please also observe the further product documentation!