multicomp PRO


RoHS Compliant



Features

- · Self-Inductance as low as 11nH
- ESR as low as $0.5 \text{ m}\Omega$
- Low profile
- · High thermal conductivity
- · Life expectancy as high as 100 Khrs
- Integrated mounting flanges
- Flame retardant UL94- V0

Construction



Applications

- DC filtering
- Wind power inverters
- · Solar power inverters
- Induction heaters
- · Electric vehicle inverters
- Motor drives



Technical Specifications

Physical Characteristics

Electrode material : Metallised polypropylene film

Winding construction : Polypropylene film, metallised polypropylene film

Enclosure : Preformed UL 94-VO plastic case with thermosetting resin-fill

Terminals : Nickel plated brass

Electrical Characteristics

Capacitance range : 30µF to 265µF

Capacity tolerance : ±10%

Rated voltage V DC : 700, 800, 900, 1000, 1200, 1400, 1600, 1800

Test voltage between terminals : 1.3 x rated voltage V DC for 60 seconds (not to be repeated)

Test voltage terminal to case : 3KV AC at 50Hz for 60 seconds
Dissipation factor (Tan d) : 0.0015 at 100Hz and 25°C

Temperature range : -40°C to +105°C

Insulation resistance M $\Omega \times \mu F$: 5,000 S at 25°C (S = M $\Omega \times \mu F$) Reference Standard : IEC 61071and IEC 60068

Marking on Capacitors

- · Each capacitor will have the following information printed on it.
- The capacitor grade viz DCL-23
- The capacitance value μF
- The rated voltage V DC
- · The max current Arms
- · Capacity tolerance and manufacturing code
- · Part number on non-standard capacitors

multicomp PRO

Standard Capacitor Values

Rated voltage VDC	Nominal Capacitance µF at 1 kHz	Case size ф × L mm	Typical ESR at 100kHz mΩ	Terminal Style	Fr** kHz	Rise in core temperature per watt dissipated°C	Ripple current rating Irms at 10 kHz to 100kHz					Part Number
							25°C	45°C	65°C	85°C	105°C	Part Number
700	100	85 × 51	0.75	FS	105	12.3	96	83	69	49	12	MP003970
700	100	85 × 51	0.75	MS	105	12.3	96	83	69	49	12	MP003973
	200	85 × 64	0.95	MS	71	10.8	87	75	63	44	10	MP003971
800	140	85 × 51	0.75	FS	105	12.3	96	83	69	49	12	MP003976
				MS	100		90					MP003977
	200	85 × 64	0.95	FS	71	10.8	87	75	63	44	10	MP003980
000	265	85 × 79	1.65	FS	61	8.9	77	67	55	39	9	MP003981
	205			MS								MP003982
	70	85 × 40	0.56	FS	168	14.2	86	74	61	42	9	MP003994
	70	85 × 40	0.56	MS	168	14.2	86	74	61	42	9	MP004009
	100	85 × 51	0.78	FS	98	12.3	93	81	71	51	12	MP003972
	65	85 × 40	0.50	FS	68	14.2	84	92	59	40	8	MP003992
900				MS			04					MP003993
900	150 85	85 × 64	0.97	MS	73	10.8	85	76	64	45	13	MP003978
		00 ^ 04		FS			65					MP003979
	100	85 × 51	0.78	MS	98	12.3	93	81	71	51	12	MP003999
	120	85 × 64	1.18	FS	91	10.8	78	68	56	40	9	MP003974
				MS								MP003975
1000	47	85 × 40	0.8	FS	176	14.2	85	73	62	38	10	MP003988
1000				MS								MP003989
	88	85 × 51	0.80	FS	136	12.3	89	77	64	45	11	MP003995
				MS								MP003996
	38	85 × 40	1.05	FS	254	14.2	72	62	52	37	9	MP003985
1200				MS								MP003986
1200	88	85x 64	1.46	FS	116	10.8	69	60	50	35	8	MP003997
				MS								MP003998
	34	85 × 51	51 1.47	FS	218	12.3	64	55	46	33	8	MP003983
				MS			04					MP003984
1400	48	85 × 64	1.87	FS	143	10.8	61	53	44	31	7	MP004005
				MS								MP004006
	64	85 × 79	3.81	FS	124	8.9	52	45	37	27	6	MP004007
				MS								MP004008
	30	85 × 51	1.71	FS	260	12.3	62	54	45	32	7	MP004000
1600				MS								MP004001
1000	42	85 × 64	2.18	FS	171	10.8	59	51	42	30	7	MP004003
			2.10	MS								MP004004





Rated voltage VDC	Nominal Capacitance µF at 1 kHz	Case size φ × L mm	Typical ESR at 100kHz mΩ	Terminal Style	Fr** kHz	Rise in core temperature per watt dissipated°C	Ripple current rating Irms at 10 kHz to 100kHz					Part Number
							25°C	45°C	65°C	85°C	105°C	rait Nullibei
	40	85 × 79	5.63	FS	185	8.9	43	37	31	22	5	MP003987
1800	40	85 × 79	5.63	MS	185	8.9	43	37	31	22	5	MP004002
1800	30	85 × 64	2.81	FS	226	10.8	50	43	36	26		MP003967
				MS							6	MP003968


Custom designed capacitors are available on request

Terminal Style: MS

Terminal Style: FS







Dimensions: Millimetres


Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro





^{**}Fr =Typical resonant frequency (Tol.±30%)


multicomp PRO


Typical Performance Graphs







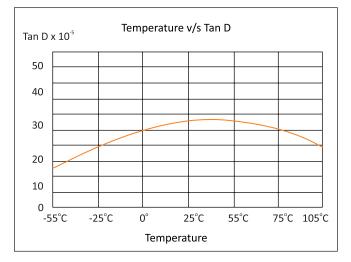



Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



Life Expectancy

Steps to calculate Hotspot Temperature

- · Locate the capacitor and the ESR from the electrical specifications
- Dissipated heat= (Irms² × ESR)
- Get the value from table 1 for Rth (°C/watt)
- Calculate internaltemperature rise = (Irms² × ESR) × Rth ("C/watt)
- Hotspot temperature of capacitor= T Ambient+ (Irms² × ESR) × Rth (°C/watt)
- · From the graph given below expected life can be obtained
- Ensure that the voltage and current specification are not exceeded

Can size	Rth					
DxH	°C/Watt					
85 x 40	14.2°C					
85 x 51	12.3°C					
85 x 64	10.8°C					
85 x 79	8.9°C					

Example:If $88 \,\mu\text{F}/800 \,\text{V}$ DC is being used at 40 Arms in a 40°C Ambient; then ESR from the table = 0.00065Ω and the case size is $\emptyset85 \times 40\text{mm}$


The dissipated wattage = $40 \times 40 \times 0.00065\Omega = 1.04$ watts

Temperature rise = 1.04 × 14.2°C/Watt = 14.76°C

The hotspot core temperature inside the capacitor= 40°C (Ambient)+ 14.76 (Rise)= 54.76 say 55°C From the graph below:If the capacitor is being used at 75% of Vrdc then the expected life will be approx 480,000 hours

Hotspot temperature Vs expected life with respect to % Vrdc



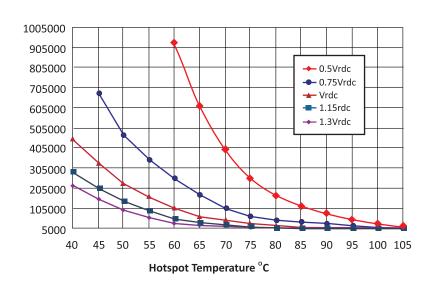

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

