DATASHEET - DILEM-10(240V50HZ)



Contactor, 240 V 50 Hz, 3 pole, 380 V 400 V, 4 kW, Contacts N/O = Normally open= 1 N/O, Screw terminals, AC operation



Part no. Catalog No. Alternate Catalog No.

DILEM-10(240V50HZ) 010032 talog XTMC9A10H5

Delivery program

beintery program			
Product range			Contactors
Application			Mini Contactors for Motors and Resistive Loads
Subrange			DILEM contactors
Utilization category			AC-1: Non-inductive or slightly inductive loads, resistance furnaces NAC-3: Normal AC induction motors: starting, switch off during running AC-4: Normal AC induction motors: starting, plugging, reversing, inching
			IE3 🗸
Notes			Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging.
Connection technique			Screw terminals
Description			With auxiliary contact
Number of poles			3 pole
Rated operational current			
AC-3			
380 V 400 V	I _e	А	9
AC-1			
Conventional free air thermal current, 3 pole, 50 - 60 Hz			
Open			
at 40 °C	I _{th} =I _e	А	22
Max. rating for three-phase motors, 50 - 60 Hz			
AC-3			
220 V 230 V	Р	kW	2.2
380 V 400 V	Р	kW	4
660 V 690 V	Р	kW	4
AC-4			
220 V 230 V	Р	kW	1.5
380 V 400 V	Ρ	kW	3
660 V 690 V	Р	kW	3
Contacts			
N/O = Normally open			1 N/0
Contact sequence			$\begin{array}{c} A_{1} \\ A_{2} \\ A_{2} \\ A_{2} \\ A_{2} \\ A_{2} \\ A_{2} \\ A_{3} \\ A_{4} \\ A_{6} \\ A_{14} \\ A_{14}$
For use with			DILEM DILE
Actuating voltage			240 V 50 Hz
Voltage AC/DC			AC operation

Technical data General

Standards			IEC/EN 60947, VDE 0660, CSA, UL
Lifespan, mechanical; Coil 50/60 Hz	Operations	x 10 ⁶	7
Lifespan, mechanical	Operations	x 10 ⁶	10
Maximum operating frequency			

Mechanical		One /h	9000
Mechanical electrical (Contactors without overload relay)	Operations/h	Ops./h	9000 Page 05/070
	operations/ii		Damp heat, constant, to IEC 60068-2-78
Climatic proofing			Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +50
Enclosed		°C	- 25 - 40
Storage		°C	
Min. ambient temperature, storage		°C	- 40
Ambient temperature, storage max.		°C	+ 80
Mounting position			As required, except vertical with terminals A1/A2 at the bottom
Mounting position			
Mechanical shock resistance (IEC/EN 60068-2-27)			
Half-sinusoidal shock, 10 ms			
Basic unit without auxiliary contact module			
Main contacts, make contacts		g	10
Main contacts Make/break contacts		g	
Make		g	8
Basic unit with auxiliary contact module			
Main contacts make contact		g	
Make		g	10
Auxiliary contacts Make/break contacts		g	20 / 20
Degree of Protection			IP20
Protection against direct contact when actuated from front (EN 50274)			Finger and back-of-hand proof
Altitude		m	Max. 2000
Weight		kg	0.17
Terminal capacity of auxiliary and main contacts Screw terminals			
Solid		2	1 x (0.75 - 2.5)
Sullu		mm ²	2 x (0.75 - 2.5)
Flexible with ferrule		mm ²	1 × (0.75 - 1.5) 2 × (0.75 - 1.5)
Solid or stranded		AWG	18 - 14
Stripping length		mm	8
Terminal screw			M3.5
Pozidriv screwdriver		Size	2
Standard screwdriver		mm	0.8 x 5.5 1 x 6
Max. tightening torque		Nm	1.2
Main conducting paths		VAC	2000
Rated impulse withstand voltage	U _{imp}	V AC	6000
Overvoltage category/pollution degree		V A C	111/3
Rated insulation voltage	Ui	V AC	690
Rated operational voltage	U _e	V AC	690
Rated operational voltage Safe isolation to EN 61140			
Rated operational voltage		V AC V AC V AC	690 300 300

Breaking capacity A and 220 V 230 V A 9 380 V 400 V A 64 500 V A 42 660 V 880 V A 42 Short-circuit protection maximum fuse V 42 Type '2', 500 V 0L/G A 10 Act 2 2 2 Act A 2 2 Act A 2 2 at 40 'C n = 1_e A 2 at 40 'C n = 1_e A 2 at 50 'C n = 1_e A 10 at 50 'C n = 1_e A 10 Notes A 10 10 open Notes A 10 Notes A 10 10 A	
380 400 VImage: solution of the solut	
500 V600 Keek V700 Keek V700 Keek V700 Keek V70	
660 V 680 VA A A2Short-circuit protection maximum fusegL/gGA0Type "1", 500 VgL/gGA0Type "1", 500 VgL/gGA0AC	
Short-circuit protection maximum fuse GL/GG A Type "2", 500 V GL/GG A Type "1", 500 V GL/GG A AC	
Type*2'.500 V gL/gG A 1 Type*1'.500 V gL/gG A 20 AC	
Type "1, 500 VBu/geABu/geAAC1AAARated operational currentAAAOpenAACa 440 °CBaleACa 440 °CBaleACa 450 °CBaleADa 650 °CBaleADa fabo °CBaleAAa fabo °CBaleAAa fabo °CBaleAAa fabo °CAAAa fabo °CAAAa fabo °CAAA	
AC Image: series of the series of the mail current, 3 pole, 50 · 60 Hz Image: series of the mail current, 3 pole, 50 · 60 Hz Image: series of the mail current, 3 pole, 50 · 60 Hz Image: series of the mail current, 3 pole, 50 · 60 Hz Image: series of the mail current, 3 pole, 50 · 60 Hz Image: series of the mail current, 3 pole, 50 · 60 Hz Image: series of the mail current, 3 pole, 50 · 60 Hz Image: series of the mail current, 3 pole, 50 · 60 Hz Image: series of the mail current, 3 pole, 50 · 60 Hz Image: series of the mail current, 3 pole, 50 · 60 Hz Image: series of the mail current, 1 pole Image: series of the mail current, 1 pol	
Rated operational current, 3 pole, 50 - 60 Hz Image: Conventional free air thermal current, 3 pole, 50 - 60 Hz Image: Conventional free air thermal current, 3 pole, 50 - 60 Hz Image: Conventional free air thermal current, 1 pole Image: Conventional free air thermal current,	
Conventional free air thermal current, 3 pole, 50-60 Hz Image: 1 minimized of the sector of the se	
OpenImage: Part of the section of the sec	
at 40 °CIn HayA2at 50 °CIn HayA0at 55 °CIn HayA1enclosedIn MaxA1NotesIn Maximu permissible ambient air temperature.Imaximu permissible ambient air temperature.NotesIn MaxAMaximu permissible ambient air temperature.openIn AAMaximu permissible ambient air temperature.open Aco-3In AAMaximu permissible ambient air temperature.AC-3In AAMaxNotesIn AAIn AAco-3In AAIn ANotesIn AAIn AAco-3In AAIn ANotesIn AAIn AAco-3In AIn AIn AAco-3<	
i at 50 °C Inh = Ie Ae 20 at 55 °C Inh = Ie Ae 19 enclosed Inh = Ie Ae 16 Notes Inh Ae Atmaximum permissible ambient air temperature. Conventional free air thermal current, 1 pole Imaximum permissible ambient air temperature. Notes Imaximum permissible ambient air temperature. open Inh Ae open Inh Ae AC-3 Inh Ae Rated operational current Inh Ae Open, 3-pole: 50 – 60 Hz Imaximum permissible ambient airtemperature (open.) Notes Imaximum permissible ambient airtemperature (open.) Ato-3 Imaximum permissible ambient airtemperature (open.) Notes Imaximum permissible ambient temperature (open.) Notes Imaximum permissible ambient temperature (open.) Ato-3 Imaximum permissible ambient temperature (open.) Notes Imaximum permissible ambient temperature (open.) Ato-3 Imaximum permissible ambient temperature (open.) Ato-4 Imaximum permissible ambient temperature (open.) Ato-4 Imaximum perm	
فاقة من المحافة المحاف المحافة المحافة ال المحافة المحافة ال	
Index Index <th< td=""><td></td></th<>	
Notes At maximum permissible ambient air temperature. Conventional free air thermal current, 1 pole I Notes I open thanaximum permissible ambient air temperature. enclosed thanaximum permissible ambient air temperature. AC-3 T Rated operational current thanaximum permissible ambient air temperature. Open, 3-pole: 50-60 Hz T Notes T Acta T <td></td>	
Conventional free air thermal current, 1 pole Image: Conventional free air therman current, 1 pole Notes A maximum permissible ambient air temperature. open the A enclosed the A AC-3 The A Rated operational current The The Open, 3-pole: 50 – 60 Hz The The Notes A Amaximum permissible ambient air temperature (open.) 220 V 230 V Image: Ambient Am	
Conventional free air thermal current, 1 pole Image: Conventional free air therman current, 1 pole Notes A maximum permissible ambient air temperature. open the A enclosed the A AC-3 The A Rated operational current The The Open, 3-pole: 50 – 60 Hz The The Notes A Amaximum permissible ambient air temperature (open.) 220 V 230 V Image: Ambient Am	
Notes Image: Mode State open Image: Mode State Image: Mode State Image: Mode State Image: Mode State Ac-3 Image: Mode State Image: Mode State Image: Mode State Ac-3 Image: Mode State Image: Mode State Image: Mode State Ac-3 Image: Mode State Image: Mode State Image: Mode State Ac-3 Image: Mode State Image: Mode State Image: Mode State Ac-3 Image: Mode State Image: Mode State Image: Mode State Ac-3 Image: Mode State Image: Mode State Image: Mode State Ac-3 Image: Mode State Image: Mode State Image: Mode State Ac-4 Image: Mode State Image: Mode State Image: Mode State Ac-4 Image: Mode State Image: Mode State Image: Mode State Ac-4 Image: Mode State Image: Mode State Image: Mode State Ac-4 Image: Mode State Image: Mode State Image: Mode State Ac-4 Image: Mode State Image: Mode State Image: Mode State Ac-4 Image: Mode State Image: Mode State Image: Mode State Ac-4 Image: Mode State	
openhA5enclosedhA4AC-3A-Rated operational currentOpen, 3-pole: 50 - 60 HzNotesIeA4220 V 230 VIeA9240 VIeA9	
enclosedhAAAC-3AAARated operational currentAAAOpen, 3-pole: 50 - 60 HzAAANotesAAA220 V 230 VIeA9240 VIeAA	
AC-3 Rated operational current Open, 3-pole: 50 – 60 Hz Herein and the maximum permissible ambient temperature (open.) 220 V 230 V Ie A 240 V Ie A	
Open, 3-pole: 50 – 60 Hz Image: Constraint of the sector	
Open, 3-pole: 50 – 60 Hz Image: Constraint of the sector	
NotesAt maximum permissible ambient temperature (open.)220 V 230 VIeA240 VIeA	
240 V I _e A 9	
415 V I _e A 9	
440V I _e A 9	
240V P kW 2.5 380 V 400 V P kW 4	
415 V P kW 4.3 440 V P kW 4.6	
500 V P kW 4	
660 V 690 V P kW 4	
AC-4	
Rated operational current	
Open, 3-pole: 50 – 60 Hz	
Notes At maximum permissible ambient air temperature.	
220 V 230 V I _e A 6.6	
240 V I _e A 6.6	
380 V 400 V I _e A 6.6	
440 V I _e A 6.6	
500 V I _e A 5	
660 V 690 V Ie A 3.4	
Motor rating P kWh	
220 V 230 V P kW 1.5	

2421/	D	1.1.47	10
240 V	P	kW	1.8
380 V 400 V	P	kW	3
415 V	P	kW	3.1
440 V	P	kW	3.3
500 V	P	kW	3
660 V 690 V DC	Р	kW	3
Rated operational current open			
DC-1			
12 V	le	A	20
24 V		A	20
60 V	l _e		
	l _e	A	20
110 V	l _e	A	20
220 V	le	A	20
Current heat losses (3- or 4-pole)			
at I _{th} , 50 °C		W	5.9
at I _e to AC-3/400 V		W	1.2
Magnet systems			
Voltage tolerance			
AC operated			
Single-voltage coil 50 Hz and dual-voltage coil 50 Hz, 60 Hz	Pick-up	x U _c	0.8 - 1.1
Dual-frequency coil 50/60 Hz	Pick-up	x U _c	
Voltage tolerance Dual-frequency coil 50/60 Hz, max. pick-up voltage		x U _c	1.1
Power consumption			
AC operation			
Single-voltage coil 50 Hz and dual-voltage coil 50 Hz, 60 Hz	Pick-up	VA	25
Single-voltage coil 50 Hz and dual-voltage coil 50 Hz, 60 Hz	Pick-up	W	22
Single-voltage coil 50 Hz and dual-voltage coil 50 Hz, 60 Hz	Sealing	VA	4.6
Single-voltage coil 50 Hz and dual-voltage coil 50 Hz, 60 Hz	Sealing	W	1.8
Duty factor		% DF	100
Switching times at 100 % $\rm U_{\rm c}$			
Make contact		ms	
Closing delay		ms	
Closing delay min.		ms	14
Closing delay max.		ms	21
Opening delay		ms	
Opening delay min.		ms	8
Opening delay max.		ms	18
Closing delay with top mounting auxiliary contact		ms	45
Reversing contactors			
Changeover time at 110 $\%~{\rm U_c}$			
Changeover time min.		ms	16
Changeover time max.		ms	21
Arcing time at 690 V AC		ms	12
Auxiliary contacts			
Positive operating contacts to EN 60947-5-1 appendix L, including auxiliary contact module	t		Yes
Rated impulse withstand voltage	U _{imp}	V AC	6000
Overvoltage category/pollution degree			111/3
Rated insulation voltage	Ui	V AC	690
Rated operational voltage	U _e	V AC	600
Safe isolation to EN 61140			
between coil and auxiliary contacts		V AC	300
,			
between the auxiliary contacts		V AC	300

40.45			
AC-15		٨	
220 V 240 V	le	A	6
380 V 415 V	le	A	3
500 V	le	A	1.5
DC L/R ≦ 15 ms			
Contacts in series:		А	
1	24 V	А	2.5
2	60 V	А	2.5
3	100 V	А	1.5
3	220 V	А	0.5
Conv. thermal current	I _{th}	А	10
Control circuit reliability	Failure rate	λ	<10 ⁻⁸ , < one failure at 100 million operations (at U _e = 24 V DC, U _{min} = 17 V, I _{min} = 5.4 mA)
Component lifespan at U _e = 240 V			
AC-15	Operations	x 10 ⁶	0.2
DC current		X IU	
	Oneratione	c	0.15
L/R = 50 ms: 2 contacts in series at I_e = 0.5 A	Operations	x 10 ⁶	0.15
Notes			Switch-on and switch-off conditions based on DC-13, time constant as specifie
hort-circuit rating without welding			
Maximum overcurrent protective device			
Short-circuit protection only			PKZM0-4
Short-circuit protection maximum fuse			
500 V		A gG/gL	6
500 V		A fast	10
urrent heat loss at a load of I _{th} per contact		W	1.1
ating data for approved types			
Switching capacity			
Maximum motor rating			
Three-phase			
200 V 208 V		HP	2
230 V		HP	3
240 V			
460 V		HP	5
480 V			
575 V 600 V		HP	5
Single-phase			A.F.
115 V 120 V 230 V		HP HP	0.5
240 V		III	1.0
General use		А	15
uxiliary contacts			
Pilot Duty			
AC operated			A600
DC operated			P300
General Use			
AC		V	600
AC		A	10
DC		v	250
DC		A	0.5
Short Circuit Current Rating		SCCR	
Basic Rating			
SCCR		kA	5
max. Fuse		A	45

Design verification as per IEC/EN 61439			
Technical data for design verification			
Rated operational current for specified heat dissipation	I _n	А	9
Heat dissipation per pole, current-dependent	P _{vid}	W	0.4
Equipment heat dissipation, current-dependent	P _{vid}	W	1.2
Static heat dissipation, non-current-dependent	P _{vs}	W	1.8
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	50
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)				
Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015])				
Rated control supply voltage Us at AC 50HZ		V	240 - 240	
Rated control supply voltage Us at AC 60HZ		V	0 - 0	
Rated control supply voltage Us at DC		V	0 - 0	
Voltage type for actuating			AC	
Rated operation current le at AC-1, 400 V		A	22	
Rated operation current le at AC-3, 400 V		A	9	
Rated operation power at AC-3, 400 V		kW	4	
Rated operation current le at AC-4, 400 V		A	6.6	
Rated operation power at AC-4, 400 V		kW	3	
Rated operation power NEMA		kW	3.7	
Modular version			No	
Number of auxiliary contacts as normally open contact			1	
Number of auxiliary contacts as normally closed contact			0	
Type of electrical connection of main circuit			Screw connection	
Number of normally closed contacts as main contact			0	


3


Approvals	
Product Standards	IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking
UL File No.	E29096
UL Category Control No.	NLDX
CSA File No.	012528
CSA Class No.	3211-04
North America Certification	UL listed, CSA certified
Specially designed for North America	No


Characteristics

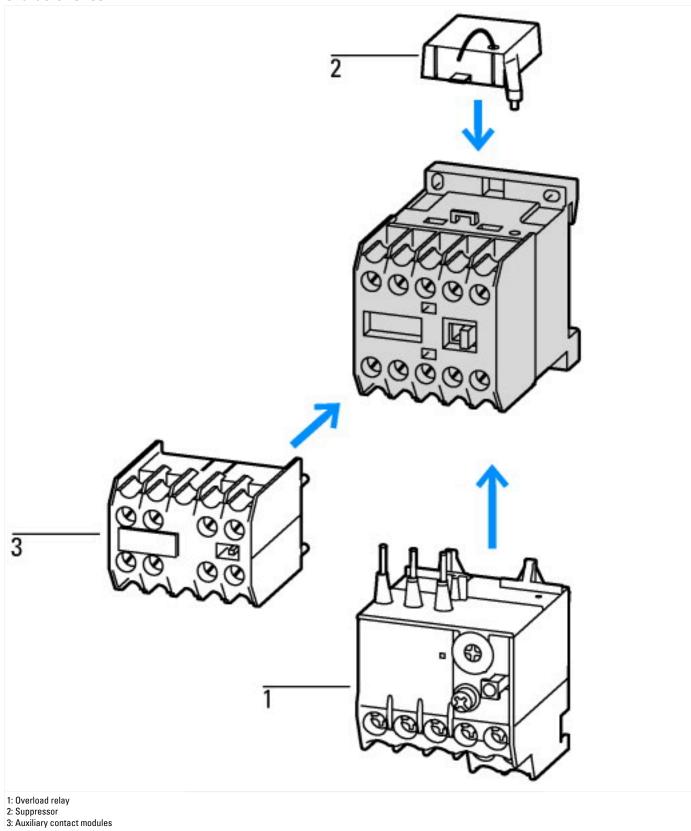


06/30/2020

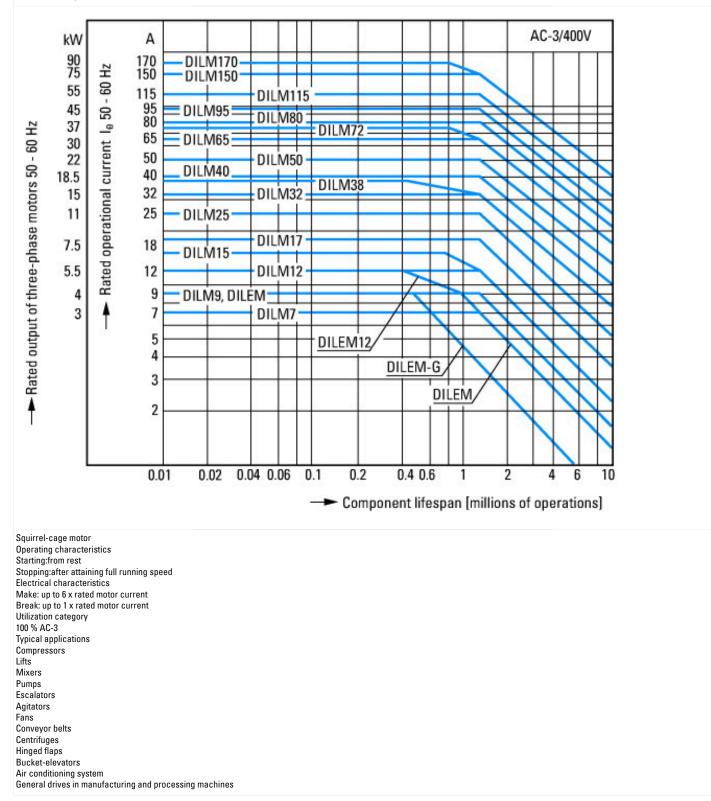

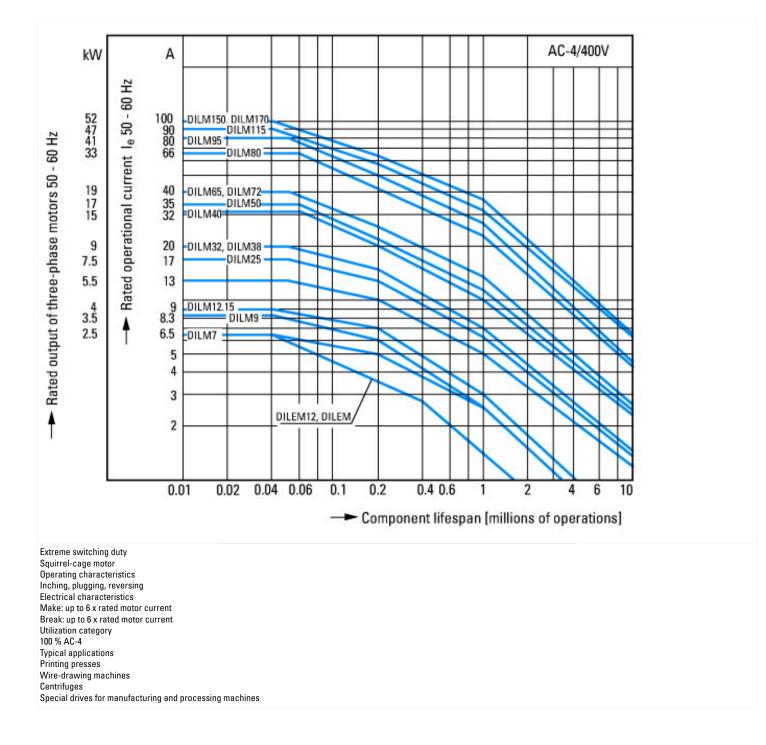


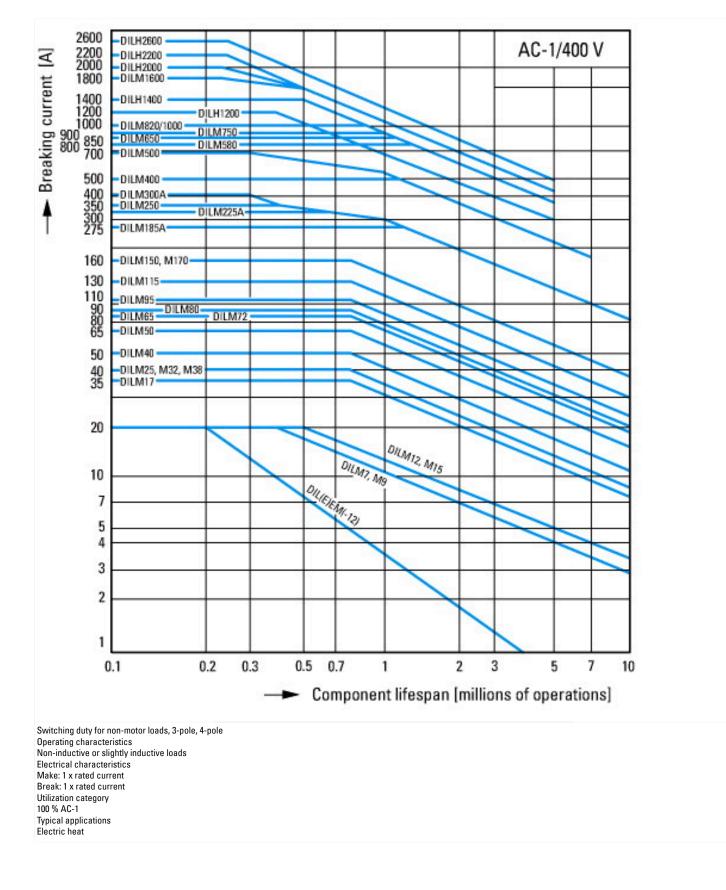


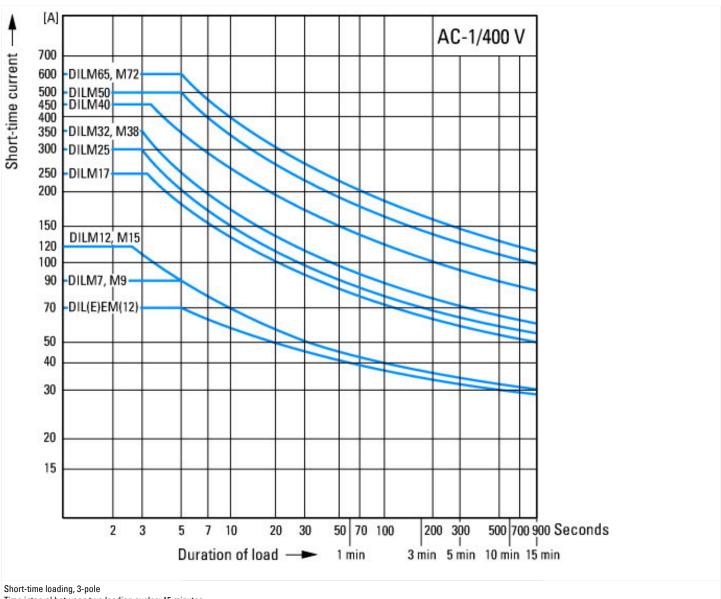

Time interval between two loading cycles: 15 minutes

Dimensions

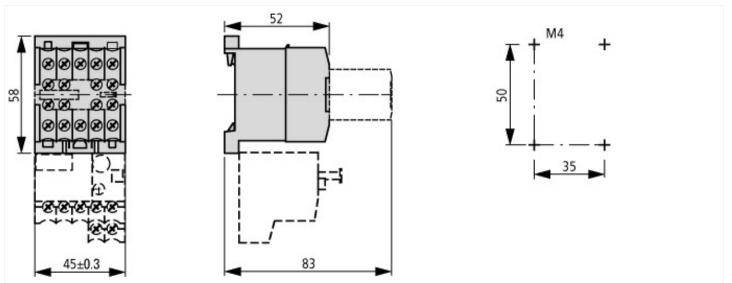

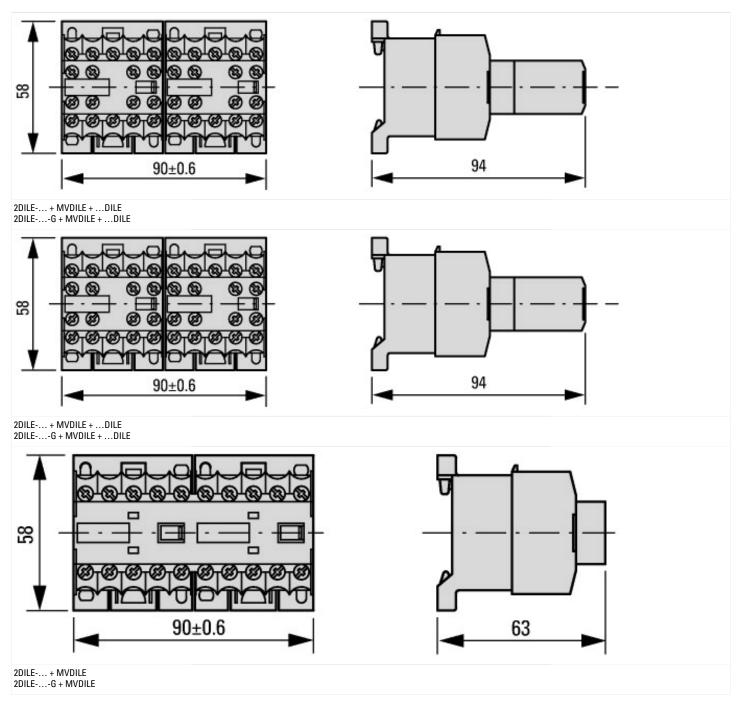

Additional product information (links)

IL03407009Z (AWA2100-0882) Mini contactor relay

IL03407009Z (AWA2100-0882) Mini contactor ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407009Z2020_05.pdf relay