


TDH50 Series

50 watt D2-PAK TO-263 Thick Film Surface Mount

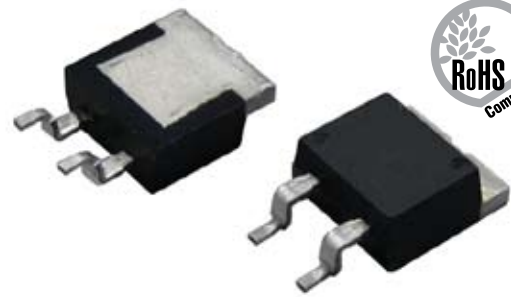

FEATURES

- 50W high power resistors in TO263 (D2-PAK) style package with matte Tin plated flange.
- Non-inductive design suits high frequency applications and high-speed pulse circuits.
- Low, 2.3 deg C/W heat resistance from resistor hot spot to flange and long life performance are presented with thick film metallization technology.
- Wide, 20 mΩ to 51K Ω resistance range.

APPLICATIONS

- UPS
- Power unit of machines
- Motor control
- Drive circuits
- Automotive
- Measurements
- Industrial computers
- High frequency electronics

CHARACTERISTICS

| Test Condition | Value | | |
|---|-------------------------------------|--------------------------------|------------------|
| Rating Power -55°C to 25°C flange temperature (when used with proper heatsink cooling system) | 50 Watt | | |
| Attached on simple footprint | 2 Watt | | |
| Heat Resistance Resistor hot spot to flange | 2.3°C/W | | |
| Resistance Range Resistance at terminal foot portion | 0.02-0.091Ω | 0.1-9.1Ω | 10-51KΩ |
| Nominal Res. Include 2.5, 4.0, 5.0, 8.0 and 16 | E6 | E24 | E24 |
| TCR TCR (ppm/°C) of low resistance will typically be increased as indicated. Testing point is at 5.27mm from bottom of molding of terminals | 300ppm 200ppm 140ppm 80ppm | 0.02Ω 0.05Ω 0.1Ω 0.2Ω | 250 100 50 |
| Tolerance 1% tolerance at 0.01-0.091Ω are available | 5%(J) | 1% (F) 5% (J) | ±1% (F) |
| Capacitance Equivalent parallel capacitance | 1.44pF | | |
| Inductance Equivalent series inductance | 8.38nH | | |
| Operation Temp. | -55°C to +155°C | | |
| Operating Volt. P is rating power and R resistance | Either 500V or $\sqrt{P \cdot R}$ | | |
| Withstand. Volt. Terminal and flange, 60 seconds. 1mA | 2000 VAC | | |
| Load Life 25°C, 90 min.ON, 30 min. OFF, 1000h. | ±1.0% | | |
| Humidity 40°C, 90-95%RH, DC 0.1W, 1000 hours. | ±1.0% | | |
| Temp. Cycle -55°C,30 min., +155°C,30 min., 5cyc | ±0.25% | | |
| Soldering Heat 350±5°C, 3 sec., | ±0.1% | | |
| Lead Solderability 245±5°C, 3seconds. | Over 95% of surface | | |
| Insulation Resistance Between terminals and tab. | Over 1,000MΩ | | |
| Vibration IEC60068-2-6. Test method is IEC60068-2-6, and specification is sine sweep wave form, 100Hz-2000Hz, 10 cycles, amplitude 0.75mm or 100m/s ² , 90minutes. direction x-y z, Amplitude 0.75mm will be applied under break point Frequency (about 60Hz) and 100m/ s ² over break point | ±0.25% | | |
| Flammability | UL94-V0 | | |
| Weight | 1.5 grams | | |


(continued)

TDH50 Series


50 watt D2-PAK TO-263 Thick Film Surface Mount

CHARACTERISTICS


Pulse Energy Durability

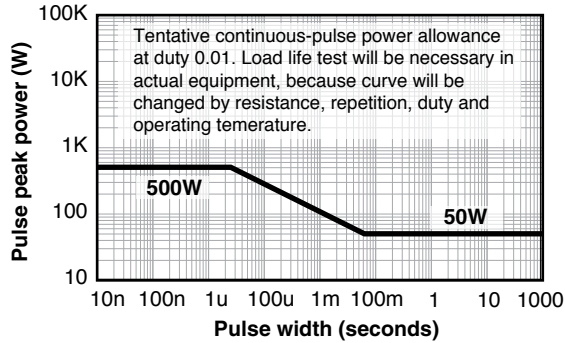


Derating

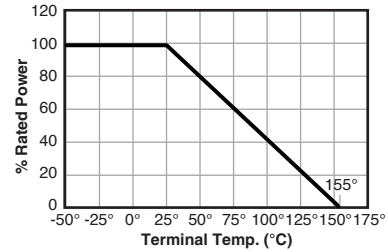


Construction

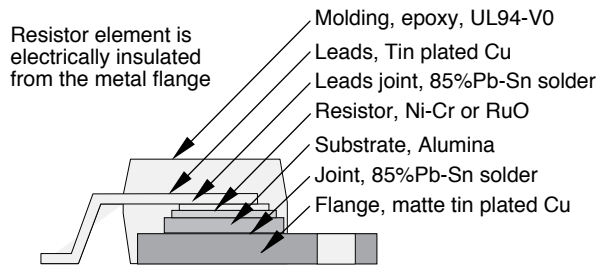

Soldering

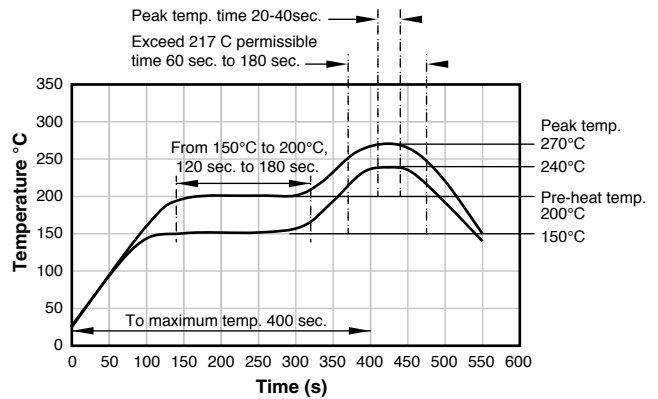


DIMENSIONS

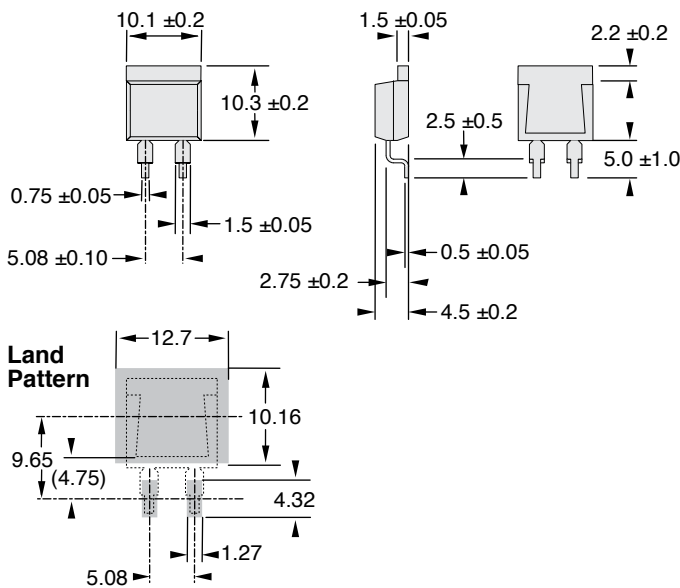

Tape Dimensions

Tape and Reel packaging supplied in 500 pcs per reel.

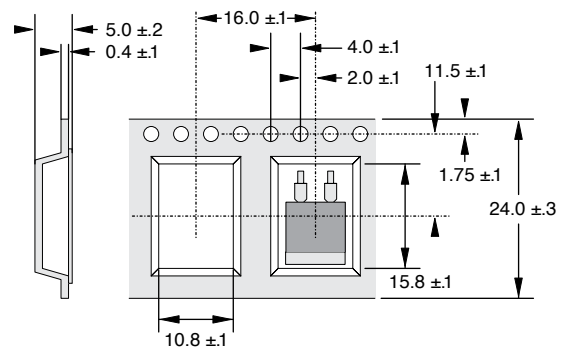

Reel Dimensions

Outer diameter: 330mm Width: 23.9mm min. 27.4mm max
Inner diameter: 100mm Package quantity: 500pcs/13" reel

(continued)

TDH50 Series

50 watt D2-PAK TO-263 Thick Film Surface Mount

ORDERING INFORMATION

| | |
|------------------------------------|---|
| T D H 5 0 R 1 0 0 J E - T R | Tape and reel (optional) 500 per reel 50 pcs tubes standard |
| Style | |
| Ohms | |
| R = Decimal | |
| Example: | |
| R100 = 0.10 | |
| 1R00 = 1.0 | |
| 10K0 = 10,000 | |
| Tolerance | |
| F = 1% | |
| J = 5% | |
| RoHS Compliant | |
| Non-compliant | |
| version unavailable | |

Standard Ohm Values

| Ohms | Part Number | Tolerance |
|--------|--------------|-----------|
| 0.05 | TDH50HR050JE | 5% |
| 0.1 | TDH50HR100FE | 1% |
| 0.2 | TDH50HR200FE | 1% |
| 1 | TDH50H1R00FE | 1% |
| 2 | TDH50H2R00FE | 1% |
| 5 | TDH50H5R00FE | 1% |
| 10 | TDH50H10R0FE | 1% |
| 20 | TDH50H20R0FE | 1% |
| 25 | TDH50H25R0FE | 1% |
| 50 | TDH50H50R0FE | 1% |
| 75 | TDH50H75R0FE | 1% |
| 100 | TDH50H100RFE | 1% |
| 200 | TDH50H200RFE | 1% |
| 500 | TDH50H500RFE | 1% |
| 1,000 | TDH50H1K00FE | 1% |
| 10,000 | TDH50H10K0FE | 1% |

THIS PRODUCT IS DESIGNED FOR USE WITH PROPER HEATSINKING.

Maximum base plate temperature of the resistor must be monitored and kept within specified limits to establish the power rating. Best technique is to attach a thermocouple to the side of the base plate of the resistor. Temperature of plastic housing or heat sink cannot be used to establish rating of the resistor.