



Analog input module; 6 analog inputs; +/-10V; 1 PT/KTY; Uref


Part no. XN-322-7AI-U2PT
 Catalog No. 178789
 Alternate Catalog No. XN-322-7AI-U2PT

Delivery program

Function		XN300 I/O slice modules
Connection technique		Push-in spring-cage terminal
Function		XN-322 analog input module for XN300
Short Description		6 analog inputs, +/-10V, 1 PT/KTY, Uref
Description		Analog I/O module with six +/-10 V / 16-bit inputs, one KTY10 / PT1000 temperature input (optionally a second temperature input), and one 10 V/15 mA reference voltage output.
For use with		XN-312-...

Technical data

General

Standards			IEC/EN 61131-2 IEC/EN 61000-6-2 IEC/EN 61000-6-4
Approvals			CE, cULus EAC
shipping classification			DNV GL
			
Electromagnetic compatibility (EMC)			
ESD	Air/contact discharge	kV	8 / 4
Electromagnetic fields	(0.08...1) / (1,4...2) / (2...2,7) GHz	V/m	10 / 3 / 1
Burst			
Supply cable		kV	2
Signal cable		kV	1
Surge			
Supply cable (balanced / unbalanced)		kV	0,5 / 0,5
Signal cable (unbalanced)		kV	1
Radiated RFI		V	10
Emitted interference (radiated, high frequency)	(30...230 MHz) / (230...1000 MHz)	dB	40 / 47 class A
Voltage fluctuations/voltage dips			Yes / 10 ms

Ambient conditions			
Climatic conditions			
Climatic proofing			Dry heat to IEC 60068-2-2 Damp heat as per EN 60068-2-3
Air pressure (operation)		hPa	795 - 1080
Relative humidity			0 - 95%, non condensing
Condensation			prevent with suitable measures
Temperature			
Operation		°C	0 - +60
Storage, transport	θ	°C	-20 - +85
Degree of Protection			
IP20			
Mounting position			
Horizontal			
Free fall, packaged (IEC/EN 60068-2-32)		m	1
Vibrations	3,5 mm / 1 g	Hz	5 - 8.4 / 8.4 -150
Mechanical shock resistance	Semisinusoidal Impacts 15 g/11 ms		18

Terminations

Rated operational data			
Insulating material group			I
Overvoltage category / pollution degree			III / 3
Rated operating voltage		V	160
Maximum load current/cross-sectional area		A / mm ²	X (not specified by plug manufacturer)
Connection design in TOP direction			
Push-in spring-cage terminal (plug-in connection)			
Stripping length		mm	10
Gauge pin IEC/EN 60947-1			A1
Connection specifications			
"e" solid H07V-U		mm ²	0.2 - 1.5
"f" flexible H 07V-K		mm ²	0.2 - 1.5
"f" with ferrules without plastic collar according to DIN 46228-1 (ferrules crimped gas-tight)		mm ²	0.25-1,5
"f" with ferrules with plastic collar according to DIN 46228-1 (ferrules crimped gas-tight)		mm ²	0.25-1,5
Cable size		AWG	24 - 16

Supply

Power supply - Input			
Power supply			
Current consumption for +5 V power supply (internal)	I	mA	(typ.) 50
Current consumption for +24 V power supply	I	mA	(typ.) 68
Potential isolation	PE (polyethylene)		yes
Power supply - Output			
Sensor/transmitter supply			
Rated operating voltage	U _a	V	10
Rated operational current	I _{max}	A	0.025
Potential isolation			no
Notes on power supply	Reference voltage output: permissible output current of 4.17 mA per channel		
Heat dissipation			
Heat dissipation (without active channels)		W	1.21
Max. heat dissipation		W	2.525
Notes on heat dissipation	The max. heat dissipation is specified as the maximum power produced inside the device's housing.		

Analog inputs

Channels		Quantity	7
Measured variables	Voltage or potentiometer, temperature		
Resolution		Bit	16
Min. value refresh time/cycle time	per channel / all channels	ms	1 / 1
Hardware input filter	Typically: 1 kHz, third-order low-pass filter		

Software input filter		parameterizable
Potential isolation		no
Notes on analog inputs		Inputs 1 and 7 can be used as temperature inputs

Functions

Voltage measurement		
Channels	Quantity	6
Measurement ranges	V DC	-10 ... +10
Value representation	m V	SIGNED16
For connection of:		2 conductors
Maximum input voltage	V DC	14
Common-mode range	V DC	±12
Input resistance	MΩ	> 10
Limiting frequency		Typically: 1 kHz (third-order low-pass filter)
Accuracy	% of full load	±0.3
Notes on voltage measurement		Open wire monitoring. The channels can also be used as potentiometer inputs.
Temperature and resistance measurement		
Channels	Quantity	2
Connectable sensors		PT1000, KTY10
Measurement ranges	temperature	PT1000:-25 ... +850 °C KTY10:-50 ... +150 °C
Value representation		SIGNED16 (0.1 °C)
For connection of:		2 conductors
Destruction limit	U _{max}	Supply voltage UAUX 14 V DC
Accuracy	% of full scale	±0.5
Notes on temperature and resistance measurements		Input resistance 33 kΩ

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I _n	A	0
Heat dissipation per pole, current-dependent	P _{vid}	W	0
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	2.525
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	0
Operating ambient temperature max.		°C	55
Degree of Protection			IP20
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Meets the product standard's requirements.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			

10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0


PLC's (EG000024) / Fieldbus, decentr. periphery - analogue I/O module (EC001596)		
Electric engineering, automation, process control engineering / Control / Field bus, decentralized peripheral / Field bus, decentralized peripheral - analogue I/O module (ecl@ss10.0.1-27-24-26-01 [BAA061014])		
Supply voltage AC 50 Hz	V	0 - 0
Supply voltage AC 60 Hz	V	0 - 0
Supply voltage DC	V	18 - 30
Voltage type of supply voltage		DC
Input, current		No
Input, voltage		Yes
Input, resistor		No
Input, resistance thermometer		Yes
Input, thermocouple		No
Input signal, configurable		No
Resolution of the analogue inputs	Bit	16
Output, current		No
Output, voltage		Yes
Output signal configurable		No
Resolution of the analogue outputs	Bit	0
Number of analogue inputs		7
Number of analogue outputs		1
Analogue inputs configurable		Yes
Analogue outputs configurable		Yes
Number of HW-interfaces industrial Ethernet		0
Number of interfaces PROFINET		0
Number of HW-interfaces RS-232		0
Number of HW-interfaces RS-422		0
Number of HW-interfaces RS-485		0
Number of HW-interfaces serial TTY		0
Number of HW-interfaces parallel		0
Number of HW-interfaces Wireless		0
Number of HW-interfaces USB		0
Number of HW-interfaces other		1
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for KNX		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No

Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		No
Radio standard Bluetooth		No
Radio standard WLAN 802.11		No
Radio standard GPRS		No
Radio standard GSM		No
Radio standard UMTS		No
IO link master		No
System accessory		Yes
Degree of protection (IP)		IP20
Degree of protection (NEMA)		
Type of electric connection		Screw-/spring clamp connection
Fieldbus connection over separate bus coupler possible		Yes
Rail mounting possible		Yes
Wall mounting/direct mounting		No
Front build in possible		No
Rack-assembly possible		No
Suitable for safety functions		No
Category according to EN 954-1		
SIL according to IEC 61508		None
Performance level acc. EN ISO 13849-1		None
Appendant operation agent (Ex ia)		No
Appendant operation agent (Ex ib)		No
Explosion safety category for gas		None
Explosion safety category for dust		None
Width	mm	16.8
Height	mm	104.2
Depth	mm	80.3

Approvals

Product Standards		CE, cULus
UL File No.		E135462

Dimensions

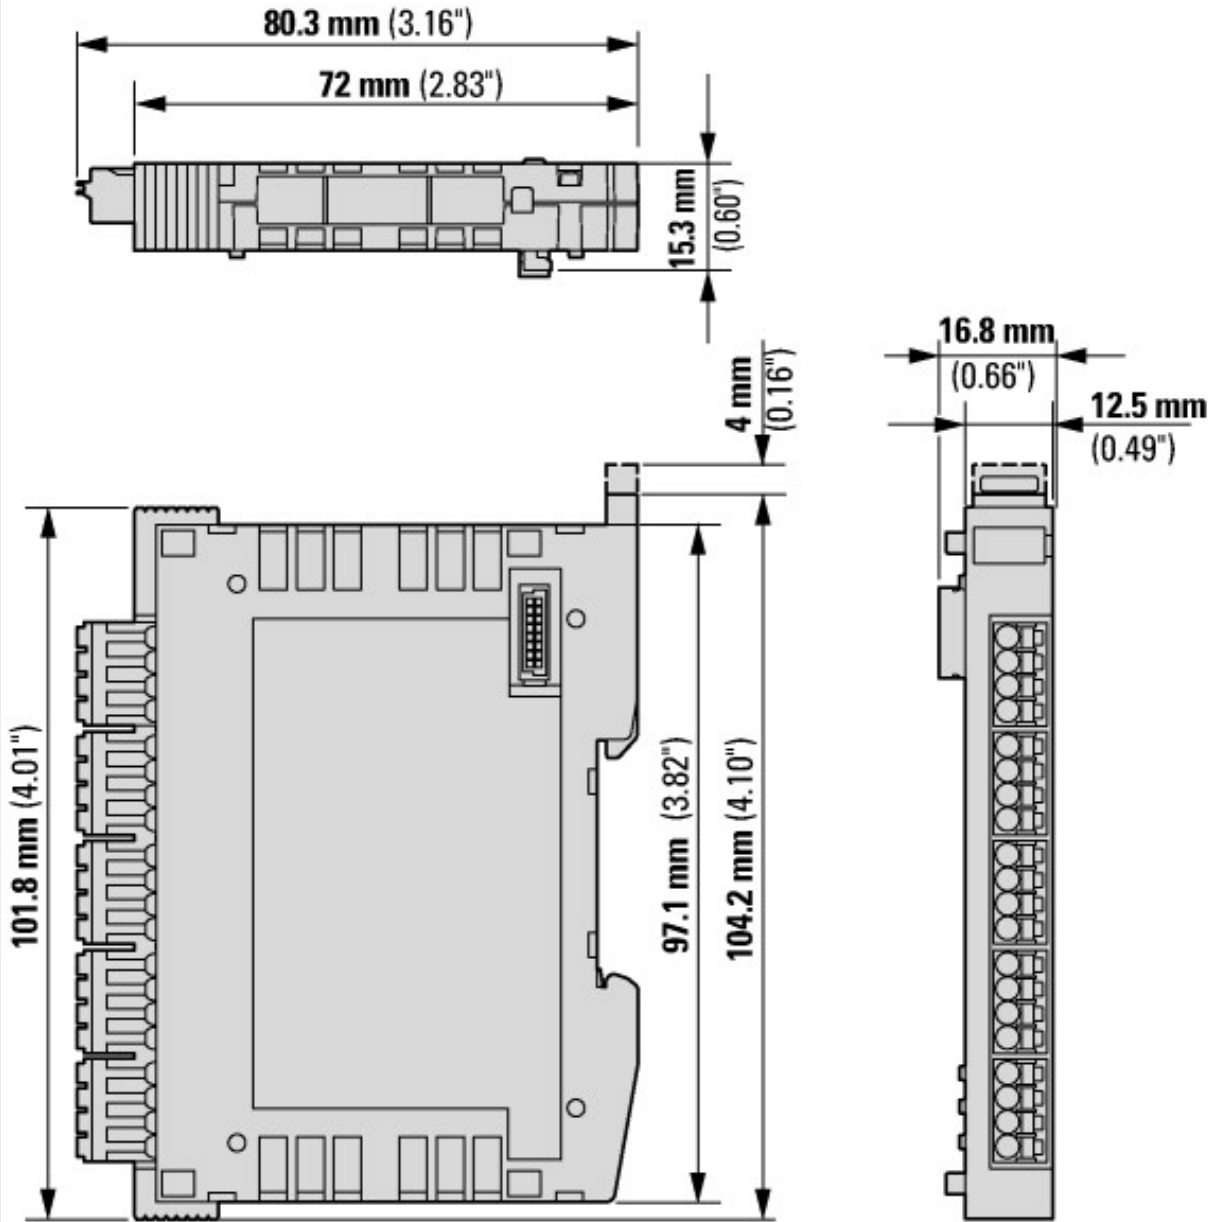

Notes: The plugs/connectors used depend on the version.

Additional product information (links)

Manual XN300 digital I/O modules, analog I/O modules, power supply modules, technology modules MN050002

Handbuch XN300 digitale E/A-Module, analoge E/A-Module, Stromversorgungsmodule, Technologiemodule MN050002 - Deutsch ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050002_DE.pdf

Manual XN300 digital I/O modules, analog I/O modules, power supply modules, technology modules MN050002 - English ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050002_EN.pdf

f1=1457&f2=1282&f3=1836;Download Wizard XN300-Assist <http://applications.eaton.eu/sdlc?LX=11&f1=1457&f2=1282&f3=1836;Download Wizard XN300-Assist>