


**Digital output module XI/ON ECO, 24 V DC, 16DO, 0.5A, pulse-switching**
**Part no. XNE-16DO-24VDC-0.5A-P**  
**Catalog No. 140039**
**EL-Nummer 0004520692**  
**(Norway)**

## Delivery program

|                   |  |  |  |
|-------------------|--|--|--|
| Function          |  |  | XI/ON I/O modules                                      |
| Function          |  |  | XNE Slice module                                       |
| Short Description |  |  | 16 Digital output, 24 V DC/0.5 A<br>Positive switching |

## Technical data

### General

|   |  |     |   |
|---|--|-----|---|
| Standards                                       |  |     | EN 61000-6-2<br>EN 61000-6-4<br>EN 61131-2  |
| Potential isolation                             |  |     | Yes, through optocoupler  |
| Ambient temperature                             |  |     |   |
| Ambient temperature, operation                  |  | °C  | 0 - +55   |
| Storage, transport                              | 9                                      | °C  | -25 - +85   |
| Relative humidity                               |  |     |   |
| Relative humidity                               |  |     | 5 - 95 % (indoor), Level RH-2, no condensation (for storage at 45°C)  |
| Ambient conditions, mechanical                  |  |     |   |
| Degree of Protection                            |  |     | IP20  |
| Harmful gases                                   |  | ppm | SO <sub>2</sub> : 10 (rel. humidity < 75%, no condensation)<br>H <sub>2</sub> S: 1.0 (rel. humidity < 75 %,no condensation) |
| Vibration resistance, operating conditions      |  |     | according to IEC/EN 60068-2-6   |
| Mechanical shock resistance                     |  | g   | according to IEC 60068-2-27   |
| Continuous shock resistance (IEC/EN 60068-2-29) |  |     | According to IEC 60068-2-29   |
| Drop and topple                                 |  |     | According to IEC 60068-2-31, free fall according to IEC 60068-2-32  |
| Electromagnetic compatibility (EMC)             |  |     |   |
| ESD   | Air/contact discharge                  | kV  | EN 61000-4-2  |
| Electromagnetic fields                          | (0.08...1) / (1,4...2) / (2...2,7) GHz | V/m | EN 61100-4-2  |
| Burst   |  |     | EN 61100-4-4  |
| Surge   |  |     | EN 61100-4-5  |
| Radiated RFI                                    |  | V   | EN 61100-4-6  |
| Emitted interference (radiated, high frequency) | (30...230 MHz) / (230...1000 MHz)      | dB  | EN 55016-2-3  |
| Voltage fluctuations/voltage dips               |  |     | EN 61131-2  |
| Type test                                       |  |     | to EN 61131-2   |
| Approvals                                       |  |     | CE, cULus   |

|  |  |  |                |
|--|--|--|----------------|
|  |  |  | EAC            |
| Other technical data (sheet catalogue) |  |  | Technical Data |

## Terminations

|  |  |                 |  |
|--|--|-----------------|--|
| Rated data   |  |                 | according to VDE 0611 Part 1/8.92 / IEC/EN 60947-7-1 |
| Connection design in TOP direction   |  |                 | Push-In spring-cage terminals                        |
| Stripping length   |  | mm              | 8  |
| Clamping range   |  |                 | max. 0.14 - 1.5 mm <sup>2</sup>                      |
| Connectable conductors   |  |                 |  |
| Outputs to EN 61131-2  |  | mm <sup>2</sup> | 0.25 - 1.5   |
| Reset after short-circuit rectified  |  | mm <sup>2</sup> | 0.25 - 1.5   |
| Vibration resistance, operating conditions   |  | mm <sup>2</sup> | 0.25 - 1.5   |
| "f" with ferrules with plastic collar according to DIN 46228-1 (ferrules crimped gas-tight)    |  | mm <sup>2</sup> | 0.25 - 0.75  |
| Connectable conductors   |  |                 |  |
| "e" solid H07V-U   |  | mm <sup>2</sup> | 0.25 - 1.5   |
| "f" flexible H 07V-K   |  | mm <sup>2</sup> | 0.25 - 1.5   |
| "f" with ferrules without plastic collar according to DIN 46228-1 (ferrules crimped gas-tight) |  | mm <sup>2</sup> | 0.25 - 1.5   |
| "f" with ferrules with plastic collar according to DIN 46228-1 (ferrules crimped gas-tight)    |  | mm <sup>2</sup> | 0.25 - 0.75  |
| Gauge pin IEC/EN 60947-1   |  |                 | A1   |

## Analog input modules

|  |                 |        |  |
|--|-----------------|--------|--|
| Channels                                       |                 | Number | 16   |
| Rated voltage through supply terminal          | U <sub>L</sub>  |        | 24 V DC  |
| Rated current consumption from supply terminal | I <sub>L</sub>  | mA     | 3  |
| Rated current consumption from module bus      | I <sub>MB</sub> | mA     | ≤ 25   |
| Connectable sensors                            |                 |        | Resistive loads<br>Inductive loads<br>Lamp loads |

## Analog output modules

|  |                 |        |                              |
|--|-----------------|--------|------------------------------|
| Channels                                       |                 | Number | 16                           |
| Rated voltage through supply terminal          | U <sub>L</sub>  |        | 24 V DC                      |
| Rated current consumption from supply terminal | I <sub>L</sub>  | mA     | 3                            |
| Rated current consumption from module bus      | I <sub>MB</sub> | mA     | ≤ 25                         |
| Load resistance                                |                 |        |                              |
| Resistive load                                 |                 | Ω      | ≥ 48                         |
| Inductive load                                 |                 | h      | As per DC13 to IEC 60947-5-1 |

## Digital outputs

|   |                                |        |  |
|---|--------------------------------|--------|--|
| Channels  |                                | Number | 16   |
| Rated voltage through supply terminal                                       | U <sub>L</sub>                 |        | 24 V DC  |
| Rated current consumption from the supply terminal (at load current = 0 mA) | I <sub>L</sub>                 | mA     | 3  |
| Rated current consumption from module bus                                   | I <sub>MB</sub>                | mA     | ≤ 25   |
| Power loss  | P                              | W      | Normally 2.5                                     |
| Output voltage  |                                |        |  |
| High level  | U <sub>H</sub> /U <sub>A</sub> |        | > U <sub>L</sub> - 1 V DC                        |
| Output current  |                                | A      |  |
| High level (rated value)  | I <sub>H</sub>                 |        | 0.5 A  |
| High level (permissible range)  | I <sub>H</sub>                 | A      | < 1.0  |
| Delay on signal change and resistive load                                   |                                |        |  |
| from Low to High level  |                                | μs     | 300  |
| From High to Low signal   |                                | μs     | 300  |
| Utilization factor  | %                              | g      | 50 %, max. 4 A                                   |
| Can be connected  |                                |        | Resistive loads<br>Inductive loads<br>Lamp loads |
| Resistive load  |                                | Ω      | ≥ 48   |
| Inductive load  |                                | h      | As per DC13 to IEC 60947-5-1                     |

|                                     |                 |    |                              |
|-------------------------------------|-----------------|----|------------------------------|
| Lamp load                           | R <sub>LL</sub> | W  | ≤ 6                          |
| Switching frequency                 |                 |    |                              |
| With resistive load                 | f               | Hz | 100                          |
| with inductive load                 |                 |    | As per DC13 to IEC 60947-5-1 |
| Switching frequency with lamp load  | f               | Hz | 10                           |
| Outputs to EN 61131-2               |                 |    | short-circuit proof          |
| Reset after short-circuit rectified | I <sub>i</sub>  |    | Automatic                    |

Digital inputs

|  |                 |        |         |
|--|-----------------|--------|---------|
| Channels                                       |                 | Number | 16      |
| Rated voltage through supply terminal          | U <sub>L</sub>  |        | 24 V DC |
| Rated current consumption from supply terminal | I <sub>L</sub>  | mA     | 3       |
| Rated current consumption from module bus      | I <sub>MB</sub> | mA     | ≤ 25    |

Relay modules

|  |                 |    |  |
|--|-----------------|----|--|
| Rated voltage through supply terminal          | U <sub>L</sub>  |    | 24 V DC  |
| Rated current consumption from supply terminal | I <sub>L</sub>  | mA | 3  |
| Rated current consumption from module bus      | I <sub>MB</sub> | mA | ≤ 25   |
| Power loss                                     | P               | W  | Normally 2.5                                     |
| Can be connected                               |                 |    | Resistive loads<br>Inductive loads<br>Lamp loads |
| Utilization factor                             | g               | %  | 100  |

Power supply module

|  |                 |    |         |
|--|-----------------|----|---------|
| Rated voltage through supply terminal          | U <sub>L</sub>  |    | 24 V DC |
| Rated current consumption from supply terminal | I <sub>L</sub>  | mA | 3       |
| Rated current consumption from module bus      | I <sub>MB</sub> | mA | ≤ 25    |
| Power loss                                     | P               | W  | 2.5     |

Counter module

|  |                 |        |         |
|--|-----------------|--------|---------|
| Channels                                       |                 | Number | 16      |
| Rated voltage through supply terminal          | U <sub>L</sub>  |        | 24 V DC |
| Rated current consumption from supply terminal | I <sub>L</sub>  | mA     | 3       |
| Rated current consumption from module bus      | I <sub>MB</sub> | mA     | ≤ 25    |

Digital outputs

|                                    |                 |    |                     |
|------------------------------------|-----------------|----|---------------------|
| Output current                     |                 | A  |                     |
| High level (permissible range)     | I <sub>H</sub>  | A  | < 1.0               |
| High level (rated value)           | I <sub>H</sub>  |    | 0.5 A               |
| Switching frequency                |                 |    |                     |
| Switching frequency with lamp load | f               | Hz | 10                  |
| Lamp load                          | R <sub>LL</sub> | W  | ≤ 6                 |
| Short-circuit rating               |                 |    | short-circuit proof |

Interfaces

|  |                 |    |              |
|--|-----------------|----|--------------|
| Rated voltage through supply terminal          | U <sub>L</sub>  |    | 24 V DC      |
| Rated current consumption from supply terminal | I <sub>L</sub>  | mA | 3            |
| Rated current consumption from module bus      | I <sub>MB</sub> | mA | ≤ 25         |
| Power loss                                     | P               | W  | Normally 2.5 |

Notes

|  |  |  |  |
|--|--|--|--|
| <p>The supply terminal (U<sub>L</sub>) provides power for the module electronics and for the consumers at the outputs. The total current required for each module consists of the sum of all partial currents.</p> <p>Part of the XI/ON module's electronics is supplied with module bus voltage (5 V DC), the other part through the supply terminal (U<sub>L</sub>).</p> <p>To increase the maximum output current to up to 1 A, two outputs can be connected in parallel.</p> |  |  |  |
| Note for table header  |  |  | <p>The rated current from supply terminal data apply at zero load current.</p> <p>Applies for resistive load: RLO &lt; 1kΩ</p> |

Design verification as per IEC/EN 61439

|  |  |  |
|--|--|--|
| Technical data for design verification |  |  |
|--|--|--|

|  |                   |    |  |
|--|-------------------|----|--|
| Rated operational current for specified heat dissipation   | I <sub>n</sub>    | A  | 0  |
| Heat dissipation per pole, current-dependent   | P <sub>vid</sub>  | W  | 0  |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub>  | W  | 0  |
| Static heat dissipation, non-current-dependent   | P <sub>vs</sub>   | W  | 2.5  |
| Heat dissipation capacity  | P <sub>diss</sub> | W  | 0  |
| Operating ambient temperature min.   |                   | °C | 0  |
| Operating ambient temperature max.   |                   | °C | 55   |
| Degree of Protection   |                   |    | IP20   |
| IEC/EN 61439 design verification   |                   |    |  |
| 10.2 Strength of materials and parts   |                   |    |  |
| 10.2.2 Corrosion resistance  |                   |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                   |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                   |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                   |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |                   |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |                   |    | Meets the product standard's requirements.   |
| 10.4 Clearances and creepage distances   |                   |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |                   |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |                   |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |                   |    |  |
| 10.9.2 Power-frequency electric strength   |                   |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |                   |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |                   |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |                   |    | Is the panel builder's responsibility.   |
| 10.12 Electromagnetic compatibility  |                   |    | Is the panel builder's responsibility.   |
| 10.13 Mechanical function  |                   |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

|   |  |    |         |
|---|--|----|---------|
| PLC's (EG000024) / Fieldbus, decentr. periphery - digital I/O module (EC001599)   |  |    |         |
| Electric engineering, automation, process control engineering / Control / Field bus, decentralized peripheral / Field bus, decentralized peripheral - digital I/O module (ecl@ss10.0.1-27-24-26-04 [BAA055014]) |  |    |         |
| Supply voltage AC 50 Hz   |  | V  | 0 - 0   |
| Supply voltage AC 60 Hz   |  | V  | 0 - 0   |
| Supply voltage DC   |  | V  | 18 - 30 |
| Voltage type of supply voltage  |  |    | DC      |
| Number of digital inputs  |  |    | 0       |
| Number of digital outputs   |  |    | 16      |
| Digital inputs configurable   |  |    | No      |
| Digital outputs configurable  |  |    | No      |
| Input current at signal 1   |  | mA | 0       |
| Permitted voltage at input  |  | V  | 0 - 0   |
| Type of voltage (input voltage)   |  |    | DC      |
| Type of digital output  |  |    | Other   |
| Output current  |  | A  | 0.5     |
| Permitted voltage at output   |  | V  | 0 - 29  |
| Type of output voltage  |  |    | DC      |
| Short-circuit protection, outputs available   |  |    | Yes     |


|  |    |                                |
|--|----|--------------------------------|
| Number of HW-interfaces industrial Ethernet            |    | 0                              |
| Number of interfaces PROFINET                          |    | 0                              |
| Number of HW-interfaces RS-232                         |    | 0                              |
| Number of HW-interfaces RS-422                         |    | 0                              |
| Number of HW-interfaces RS-485                         |    | 0                              |
| Number of HW-interfaces serial TTY                     |    | 0                              |
| Number of HW-interfaces parallel                       |    | 0                              |
| Number of HW-interfaces Wireless                       |    | 0                              |
| Number of HW-interfaces USB                            |    | 0                              |
| Number of HW-interfaces other                          |    | 1                              |
| With optical interface                                 |    | No                             |
| Supporting protocol for TCP/IP                         |    | No                             |
| Supporting protocol for PROFIBUS                       |    | Yes                            |
| Supporting protocol for CAN                            |    | Yes                            |
| Supporting protocol for INTERBUS                       |    | No                             |
| Supporting protocol for ASI                            |    | No                             |
| Supporting protocol for KNX                            |    | No                             |
| Supporting protocol for MODBUS                         |    | No                             |
| Supporting protocol for Data-Highway                   |    | No                             |
| Supporting protocol for DeviceNet                      |    | No                             |
| Supporting protocol for SUCONET                        |    | No                             |
| Supporting protocol for LON                            |    | No                             |
| Supporting protocol for PROFINET IO                    |    | No                             |
| Supporting protocol for PROFINET CBA                   |    | No                             |
| Supporting protocol for SERCOS                         |    | No                             |
| Supporting protocol for Foundation Fieldbus            |    | No                             |
| Supporting protocol for EtherNet/IP                    |    | No                             |
| Supporting protocol for AS-Interface Safety at Work    |    | No                             |
| Supporting protocol for DeviceNet Safety               |    | No                             |
| Supporting protocol for INTERBUS-Safety                |    | No                             |
| Supporting protocol for PROFIsafe                      |    | No                             |
| Supporting protocol for SafetyBUS p                    |    | No                             |
| Supporting protocol for other bus systems              |    | Yes                            |
| Radio standard Bluetooth                               |    | No                             |
| Radio standard WLAN 802.11                             |    | No                             |
| Radio standard GPRS                                    |    | No                             |
| Radio standard GSM                                     |    | No                             |
| Radio standard UMTS                                    |    | No                             |
| IO link master   |    | No                             |
| System accessory                                       |    | Yes                            |
| Degree of protection (IP)                              |    | IP20                           |
| Type of electric connection                            |    | Screw-/spring clamp connection |
| Time delay at signal exchange                          | ms | 0 - 0.1                        |
| Fieldbus connection over separate bus coupler possible |    | Yes                            |
| Rail mounting possible                                 |    | Yes                            |
| Wall mounting/direct mounting                          |    | No                             |
| Front build in possible                                |    | No                             |
| Rack-assembly possible                                 |    | No                             |
| Suitable for safety functions                          |    | No                             |
| Category according to EN 954-1                         |    | None                           |
| SIL according to IEC 61508                             |    | None                           |
| Performance level acc. EN ISO 13849-1                  |    | None                           |
| Appendant operation agent (Ex ia)                      |    | No                             |
| Appendant operation agent (Ex ib)                      |    | No                             |
| Explosion safety category for gas                      |    | None                           |

|                                    |    |       |
|------------------------------------|----|-------|
| Explosion safety category for dust |    | None  |
| Width                              | mm | 13    |
| Height                             | mm | 161.5 |
| Depth                              | mm | 74.5  |

## Approvals

|                                      |  |  |
|--------------------------------------|--|--|
| Product Standards                    |  | UL 508; CSA-C22.2 No. 142; IEC/EN 6113-2; CE marking |
| UL File No.                          |  | E205091  |
| UL Category Control No.              |  | NRAQ, NRAQ7  |
| CSA File No.                         |  | UL report applies to both US and Canada              |
| CSA Class No.                        |  | 2252-01, 2252-81                                     |
| North America Certification          |  | UL recognized, certified by UL for use in Canada     |
| Specially designed for North America |  | No   |
| Current Limiting Circuit-Breaker     |  | No   |
| Degree of Protection                 |  | IEC: IP20, UL/CSA Type: -                            |

## Dimensions

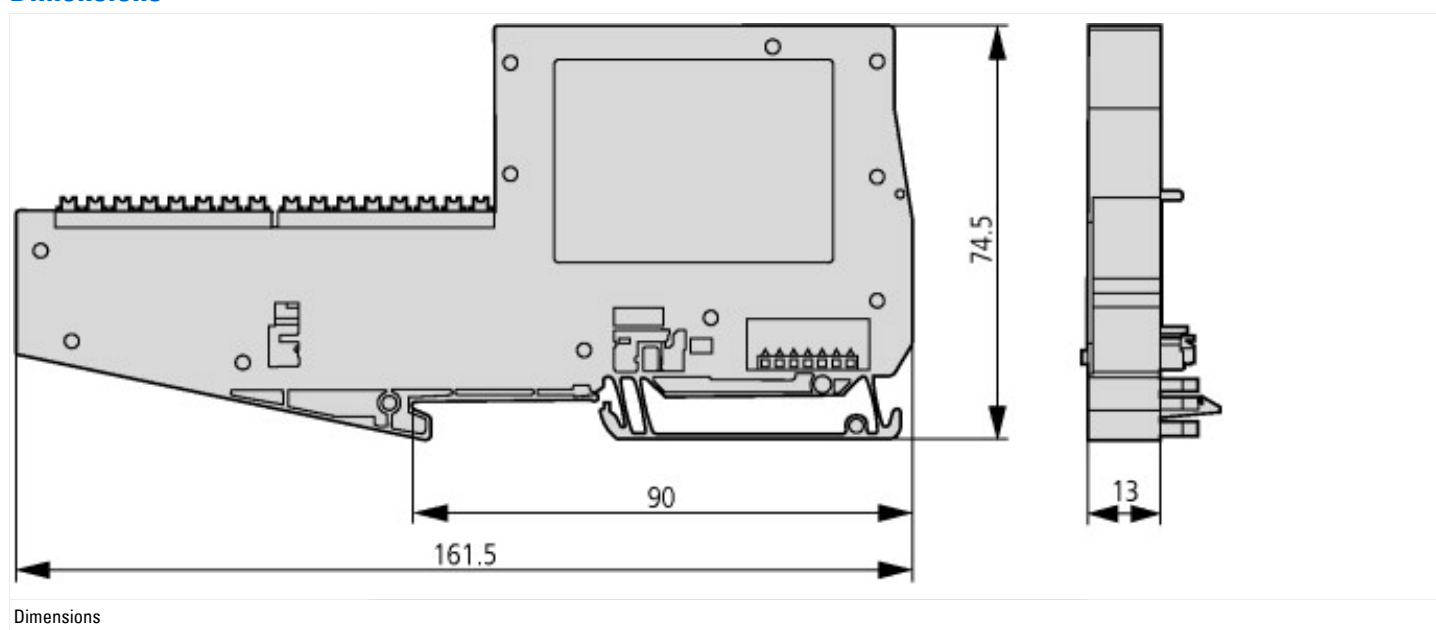

## Additional product information (links)

|  |   |
|--|---|
| <b>Manual Digital XI/ON modules, power supply module MN05002010Z</b>       |   |
| Benutzerhandbuch XI/ON-Module, Stromversorgungsmodul MN05002010Z - Deutsch | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002010Z_DE.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002010Z_DE.pdf</a>     |
| Manual Digital XI/ON modules, power supply module MN05002010Z - English    | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002010Z_EN.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002010Z_EN.pdf</a>     |
| Technical Data   | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=14.111">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=14.111</a> |