Resettable PPTC Fuses - 2920 multicomp PRO



MP005243




MP005244

Dimensions: Millimetres

RoHS Compliant

Features

- · Fast tripping, 2920 Size
- · Surface mountable, Solid state
- · Holding Current: 10A and 12A, @25°C
- Maximum Voltage: 16V
- Operating Temperature: -40°C to +85°C
- Agency Approvals: UL E345393, TUV R50450101



Dort NO	Maukina	Α		В		С		D	E
Part NO.	Marking	Min	Max	Min	Max	Min	Max	Min	Min
MP005243	1000	0.70	7.98	1 4 0	5.44	0.5	1.2	0.3	0.15
MP005244	1200	6.73		4.8	5.44	0.6	1.4		

Electrical Specifications

						Maximum T	ime-to-Trip	Resis	tance
Part NO.	VMAX (V)	IMAX (A)	Iн (A)	Iτ (A)	P _D (W)	Current	Time	RMIN	R1max
						(A)	(Sec)	(Ω)	(Ω)
MP005243	16	F0	10	20	1.6	50	5	0.0004	0.005
MP005244	16 50	12	24	1.6	50	7	0.0002	0.003	

Thermal Derating Chart-I_H (A)

Part NO.	Maximum holding current at assigned ambient temperature (A)								
Part NO.	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
MP005243	14	12.83	11.47	10	8.97	8.33	7.7	7.07	6.1
MP005244	16.8	15.4	13.76	12	10.76	10	9.24	8.48	7.32

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



Resettable PPTC Fuses - 2920 multicomp PRO

Physical Characteristics

Terminal Pad Materials	Tin-Plated Nickle-copper		
Soldering Characteristics	EIA Specification RS 186-9E, ANSI/J-STD-002		
Moisture Sensitivity	Level 2a, per IPC/JEDEC J-STD 020C		

Test Procedures And Requirements

Test Item	Test Conditions	Accept/Reject Criteria
Initial Resistance	In still air at 25°C	Rmin≤R≤R1max
Time to Trip	Specified current VMAX, 25°C	t≤ Maximum Time to Trip
Holding Current	1 hour at lн, 25°C	No trip
Trip Endurance	VMAX, IMAX, 1 hour	No arcing or burning

Solder Reflow Profiles And Pad Layout Dimensions

Solder pad layout Dimensions (mm)				
Normal Value	F	G	Н	
Normal value	2.3	5.1	5.6	
Profile Feature Pb-Free				

Average ramp up rate (Tsmax to Tp) 3°C/ max.

Preheat

- Temperature min (TSMIN) 150°C
- Temperature max (Tsmax) 200°C
- Time (tsmin to tsmax) 60 to 120 seconds

Time maintained above


- Temperature (T_L) 217°C
- Time(tL) 60 to 150 seconds


Peak/Classification temperature (TP) 260°C

Time within 5°C of actual peak temperature Time (tP) 30 seconds max

Ramp down rate 3°C/second max

Time 25°C to peak temperature 8 minutes max





Recommended reflow methods: IR, hot air oven, N2 environment for lead-free.

Devices are not designed to be wave soldered to the bottom side of the board.

Recommended maximum paste thickness is 0.25mm (0.01inch).

Devices can be cleaned using standard industry methods and aqueous solvents.

Devices can be reworked using the standard industry practices .Please also avoid direct contact to the device.

If reflow temperature exceed the recommended profile, devices may not meet the performance requirements.





Resettable PPTC Fuses - 2920 multicomp PRO


Packing Information


Tape Specifications

W	16+0.3/-0.1		
P0	4 ±0.1		
P1	8 ±0.1		
P2	2 ±0.1		
A0	5.55 ±0.1		
B0	7.85 ±0.1		
D0	1.5 +0.1/-0		
D1	1.5 +0.1/-0		
F	7.5 ±0.1		
E	1.75 ±0.1		
T	0.3 ±0.05		
K0	1 ±0.1		
	1.3 ±0.1		
Reel Dimensions			
Α	178 ±2		
D	13.3 ±0.3		

16.9 ±0.8

59 + 1

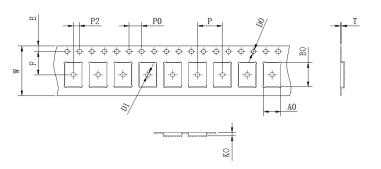



Storage

W

Ν

The maximum ambient temperature shall not exceed 40°C. Storage temperatures higher than 40°C could result in the deformation of packaging materials. The maximum relative humidity recommended for storage is 70%. High humidity with high temperature can accelerate the oxidation of the solder plating on the termination and reduce the solderability of the components. Sealed plastic bags with desiccant shall be used to reduce the oxidation of the termination and shall only be opened prior to use

Warning

- Use PPTC beyond the maximum ratings or improper use may result in device damage, electrical arcing and flame.
- PPTC are intended for protection against occasional over current or over temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Use PPTC with a large inductance in circuit will generate a circuit voltage above the rated voltage of the PPTC.
- · Avoid impact PPTC device its thermal expansion like placed under pressure or installed in limited space.
- Contamination of the PPTC material with certain silicon based oils or some aggressive solvents can adversely impact the
 performance of the devices.
- Users should independently evaluate the suitability of the product and test each product selected for their own application.

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

