

15W AC to DC Converter - PCB Mount

multicomp PRO

**RoHS
Compliant**



Features

- Universal Input : 85V AC to 264V AC/100 - 370V DC
- Operating temperature range: -40°C to +70°C
- High isolation voltage up to 4K V AC
- Regulated output, Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- High efficiency, high reliability
- Plastic case, meets UL94V-0
- EMI performance meets CISPR32 / EN55032 CLASS B
- IEC62368, UL62368, EN62368 standards approval



This is a 20W compact size power converter with ultra-slim volume. It features universal input voltage, taking both DC and AC input voltage, low power consumption, low ripple & noise, high efficiency, high reliability, 4000V AC safer isolation. It offers good EMC performance, meet IEC/EN61000-4, CISPR32/EN55032, UL62368 and EN62368 standards, and widely used in industrial, electricity, instruments, telecommunication and civil applications. Note: Please refer to Design Reference when module being used in a bad EMC environment.

Selection Guide					
Certification	Part No.*	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency at 230V AC (%) Typ.	Max. Capacitive Load (μF)
UL/CE/CB	MP-LDE15-20B03	6.6W	3.3V/2700mA	72	10000
	MP-LDE15-20B05	13.5W	5V/2700mA	76	6600
	MP-LDE15-20B09	15W	9V/1660mA	77	4400
	MP-LDE15-20B12		12V/1250mA	80	3000
	MP-LDE15-20B24		24V/625mA	81	800

Input Specifications						
Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Voltage Range	AC input	85	-	264	V	DC
	DC input	100		370		
Input Frequency		47		63		Hz
Input Current	115V AC	-	0.27	0.32	A	
	230V AC		0.17	0.2		
Inrush Current	115V AC	-	12	-		
	230V AC		36	-		
Recommended External Input Fuse		3.15A/250V, slow fusing, necessary				
Hot Plug		Unavailable				

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

15W AC to DC Converter - PCB Mount

multicomp PRO

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	0%-100%	3.3V output	-	±3	-	%
		Other models		±2		
Line Regulation	Full load			±0.5		
Load Regulation	0%-100% load			±1		
Ripple & Noise*	20MHz Bandwidth (peak-to-peak value)			50	120	mV
Temperature Coefficient				±0.02	-	%/°C
Short Circuit Protection			Hiccup, continuous, self-recovery			
Over-current Protection			≥130% Io, self-recovery			
Over-voltage Protection	3.3/5V output		≤7.5V			
	9V output		≤15V			
	12/15V output		≤20V			
	24V output		≤30V			
Minimum Load			0	-		%
Hold-up Time	115V AC input		5	10	-	ms
	230V AC input		44	55		

Note: *Ripple and noise tested with "parallel cable" method, Testing at rated load. Please see AC-DC Converter Application Notes for specific operation methods.

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Isolation Voltage	Input-output	Test time: 1min (leakage current°C 5mA)	4000	-	-	V AC	
Operating Temperature			-40	-	+70	°C	
Storage Temperature					+85		
Storage Humidity			-	-	95	%RH	
Welding Temperature	Wave-Soldering		260 ± 5°C; time: 5 - 10s				
	Manual-Welding		360 ± 10°C; time: 3 - 5s				
Switching Frequency			-	100	-	kHz	
Power Derating	-40°C to -10°C						
	+45°C to +70°C	3.3/5V	4	-	-	% / °C	
		Others					
	85V AC to 130V AC	5V	-25°C to +70°C	2.5	-	-	% / V AC
			-40°C to -25°C				
85V AC to 100V AC	Others	-25°C to +70°C	1	-	-	% / V AC	
		-40°C to -25°C					
240V AC to 264V AC							
Safety Standard			IEC62368/EN62368/UL62368				
Safety Certification			IEC62368/EN62368/UL62368				
Safety Class			CLASS II				
MTBF			MIL-HDBK-217F@25°C > 300,000 h				

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicomp PRO


15W AC to DC Converter - PCB Mount

multicomp PRO

Physical Specifications		
Casing Material		Black flame-retardant and heat-resistant plastic (UL94 V-0)
Package Dimensions	DIP	53.8mm × 28.8mm × 23.5mm
	A2S chassis mounting	76mm × 31.5mm × 32.3mm
	A4S Din-Rail mounting	76mm × 31.5mm × 36.9mm
Weight	DIP	60g (Typ.)
	A2S chassis mounting	80g (Typ.)
	A4S Din-Rail mounting	100g(Typ.)
Cooling Method		Free air convection



EMC Specifications			
EMI	CE	CISPR32/EN55032	CLASS B
	RE	CISPR32/EN55032	CLASS B
EMS	ESD	IEC/EN61000-4-2	Contact ±6KV/ Air ±8KV perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m perf. Criteria A
	EFT	IEC/EN 61000-4-4	± 4KV perf. Criteria B
	Surge	IEC/EN 61000-4-5	line to line ± 2KV perf. Criteria B
		IEC/EN 61000-4-5	line to line ± 4KV/line to ground ±4 KV (See Fig. 2 for recommended circuit) perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s perf. Criteria A
Voltage dips, short interruptions and voltage variations		IEC/EN61000-4-11	0%,70% perf. Criteria B

Product Characteristic Curve


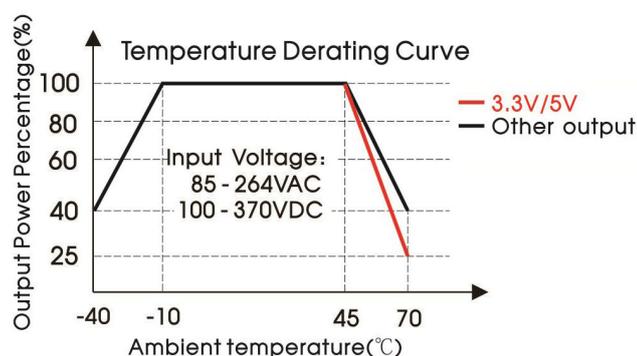


15W AC to DC Converter - PCB Mount

multicomp PRO

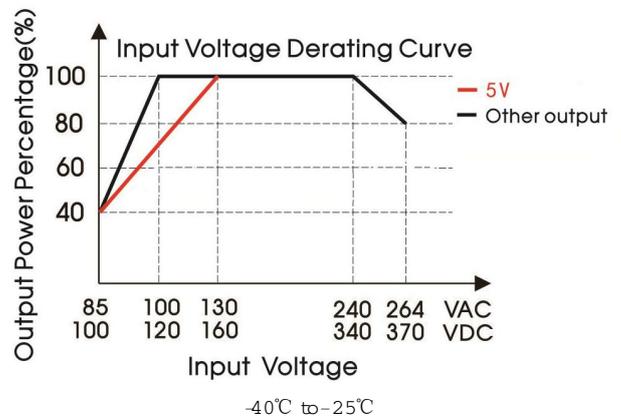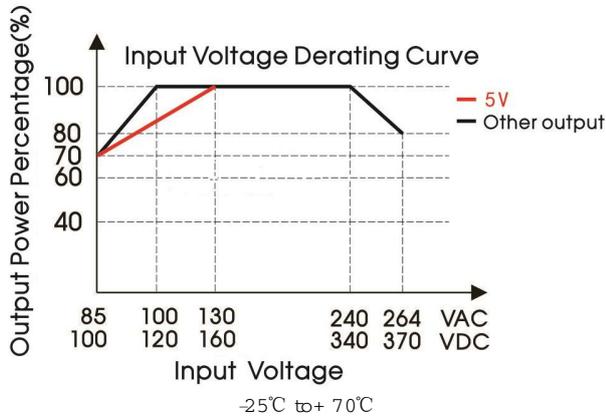

Note: ① Input voltages should be derated based on temperature rating when it is 85-100VAC/240-264VAC/100±40VDC/340-370VDC;
 ② This product is suitable for use in natural air cooling environments, if in a closed environment, please contact our company's SA.

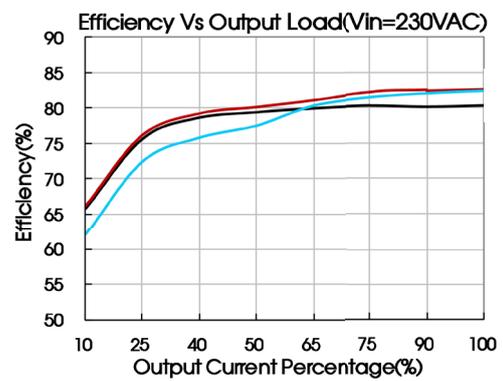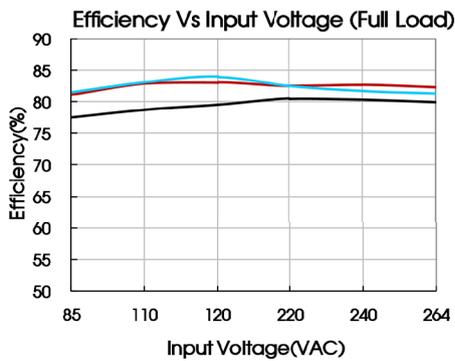

Design Reference

1. Typical Application

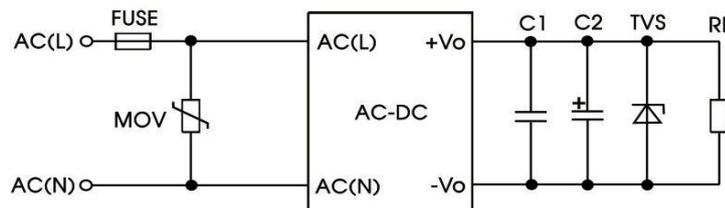


Fig. 1

15W AC to DC Converter - PCB Mount

Part No.	FUSE	MOV	C1	C2	TVS tube
MP-LDE15-20B03	3.15A/250V, slow fusing, necessary	S20K300	1 μ F/50V	220 μ F/16V	SMBJ7A
MP-LDE15-20B05				120 μ F/25V	SMBJ12A
MP-LDE15-20B09					SMBJ20A
MP-LDE15-20B12					SMBJ30A
MP-LDE15-20B24				68 μ F/35V	SMBJ30A

Output Filter Components:

- Output filtering capacitor C2 is electrolytic capacitor, it is recommended to apply electrolytic capacitor with high frequency and low resistance. For capacitance and current of capacitor please refer to manufacture's datasheet. Capacitor voltage reduced to at least 80%. C1 is ceramic capacitor, which is used to filter high-frequency noise. TVS is a recommended component to protect post-circuits if converter fails.
- The product in the application must connect external electrolytic capacitors C2, to achieve lower ripple noise and better dynamic load performance.
- When the product's output terminal is connected to high frequency switch type load, electrolytic capacitor C2's selection is as following:

Model	C2
MP-LDE15-20B03	470 μ F/16V (Solid capacitor)
MP-LDE15-20B05	
MP-LDE15-20B09	
MP-LDE15-20B12	390 μ F/25V
MP-LDE15-20B24	220 μ F/35V

2. EMC Solution-Recommended Circuit

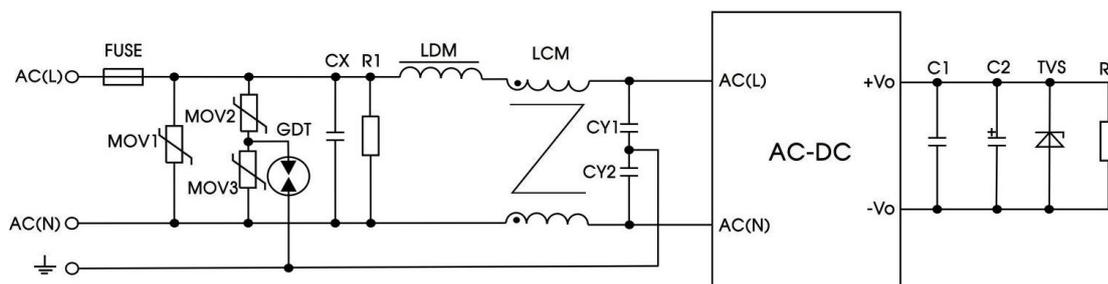


Fig2


15W AC to DC Converter - PCB Mount



Note: Output External circuit refer to the typical application circuit.

Element model	Recommended value
MOV1	S20K300
MOV2	S10K300
MOV3	S10K300
CX	0.22 μ F/275VAC
CY1, CY2	1nF/400VAC
R1	1M Ω /2W
LDM	4.7 μ H
LCM	2mH
GDT	EM3600XS
FUSE	6.3A/250V, slow fusing, necessary

Dimensions and Recommended Layout

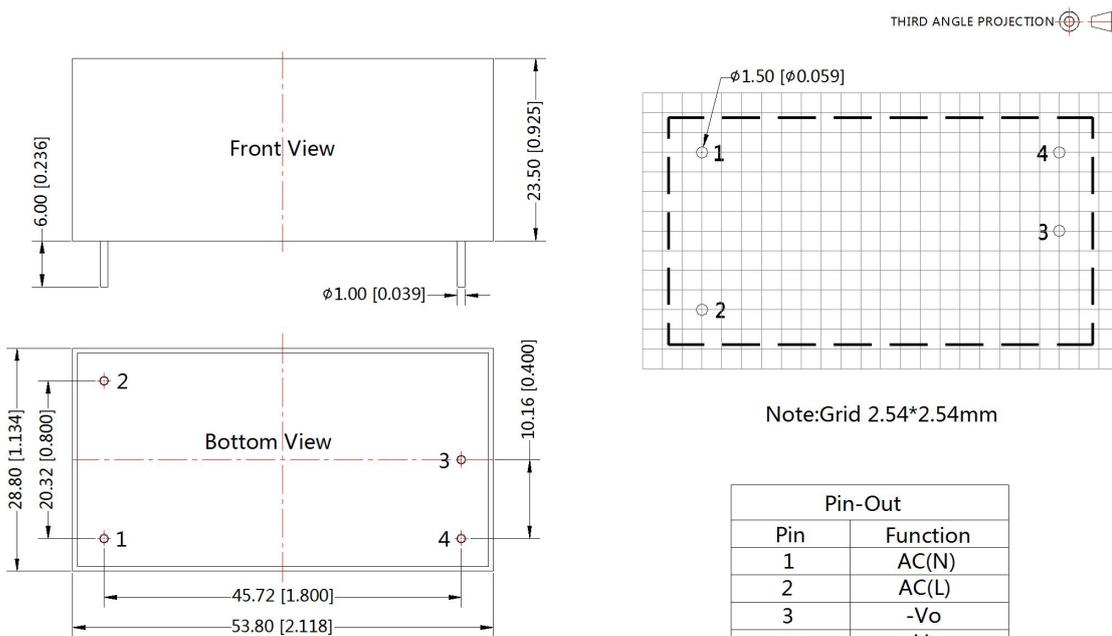

Note:
 Unit :mm[inch]
 Pin diameter tolerances : $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 0.50[\pm 0.020]$

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

