



74AHC1G86Q

5 Vcc

4 Y

SINGLE 2-INPUT POSITIVE EXCLUSIVE OR GATE

(Top View)

SOT 25 / SOT 353

#### Description

The 74AHC1G86Q is an automotive compliant single, two-input positive Exclusive OR gate with a standard push-pull output. The device is designed for operation with a power supply range of 2.0V to 5.5V. The gate performs the positive Boolean function:

$$Y = A \oplus B \text{ or } Y = \overline{A}B + A\overline{B}$$

#### Features

- Grade 1 Ambient Temperature Operation: -40°C to +125°C
- Supply Voltage Range from 2.0V to 5.5V
- ±8mA Output Drive at 5.0V
- CMOS Low-Power Consumption
- Schmitt Trigger Action at All Inputs Make the Circuit Tolerant for Slower Input Rise and Fall Time
- Inputs Not Limited by Vcc
- Balanced Propagation Delays
- Balanced Drive Capability
- ESD Protection Tested per AEC-Q100
- Exceeds 2000-V Human Body Model (AEC-Q100-002)
- Exceeds 1000-V Charged Device Model (AEC-Q100-011)
- Latch-Up Exceeds 100mA (AEC-Q100-004)
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- The 74AHC1G86Q is suitable for automotive applications requiring specific change control; this part is AEC-Q100 qualified, PPAP capable, and manufactured in IATF 16949 certified facilities.

https://www.diodes.com/quality/product-definitions/

# Applications

General Purpose Logic

**Pin Assignments** 

Wide Array of Products, such as:

AI1

B 2

GND 3

- Automotive Applications within Grade 1 Temperature Range
- Industrial Computing/Controls/Automation
- High Reliability Networking/Communications
- Industrial/Agricultural Equipment


- Notes: 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
  - 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  - 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.



# **Pin Descriptions**

Pin Name	Description
А	Data Input
В	Data Input
GND	Ground
Y	Data Output
Vcc	Supply Voltage

# Logic Diagram



### **Function Table**

Inp	Inputs			
А	В	Y		
н	Н	L		
L	Н	Н		
Н	L	Н		
L	L	L		

# Absolute Maximum Ratings (Notes 4 & 5)

Symbol	Description	Rating	Unit
ESD HBM	Human Body Model ESD Protection	2	kV
ESD CDM	Charged Device Model ESD Protection	1	kV
Vcc	Supply Voltage Range	-0.5 to 6.5	V
Vı	Input Voltage Range	-0.5 to 6.5	V
Vo	Voltage Applied to Output in High or Low State	-0.5 to V <sub>CC</sub> + 0.5	V
lıк	Input Clamp Current VI < 0	-20	mA
Іок	Output Clamp Current (Vo < 0 or Vo > Vcc)	±20	mA
lo	Continuous Output Current (Vo = 0 to Vcc)	±25	mA
lcc	Continuous Current Through Vcc	50	mA
I <sub>GND</sub>	Continuous Current Through GND	-50	mA
TJ	Operating Junction Temperature	-40 to +150	°C
T <sub>STG</sub>	Storage Temperature	-65 to +150	°C
PD	Total Power Dissipation (Note 6)	250	mW

4. Stresses beyond the absolute maximum can result in immediate failure or reduced reliability. These are stress values and device operation should

be within recommend values.
5. Forcing the maximum allowed voltage could cause a condition exceeding the maximum current or conversely forcing the maximum current could cause a condition exceeding the maximum current and voltage must be maintained within the controlled range.

6. This will need to be derated at higher operating temperatures to prevent exceeding maximum T<sub>J</sub>. Refer to package thermal characteristics section.

Notes:



Symbol		Parameter	Min	Max	Unit	
Vcc	Operating Voltage	—	2	5.5	V	
		V <sub>CC</sub> = 2V	1.5	_		
Vін	High-Level Input Voltage	V <sub>CC</sub> = 3V	2.1	—	V	
		Vcc = 5.5V	3.85	—		
		$V_{CC} = 2V$	—	0.5		
VIL	VIL Low-Level Input Voltage	V <sub>CC</sub> = 3V	—	0.9	V	
		Vcc = 5.5V	—	1.65		
VI	Input Voltage		0	5.5	V	
Vo	Output Voltage		0	Vcc	V	
		$V_{CC} = 2V$	_	-50	μA	
Іон	High-Level Output Current	$V_{CC} = 3.3V \pm 0.3V$	—	-4		
		$V_{CC} = 5V \pm 0.5V$	_	-8	mA	
		V <sub>CC</sub> = 2V	_	50	μA	
Iol	Low-Level Output Current	$V_{CC} = 5V \pm 0.5V$	_	4		
		V <sub>CC</sub> = 3V	—	8	mA	
	Input Transition Rise or Fall	$V_{CC} = 3.3V \pm 0.3V$	<u> </u>	100		
Δt/ΔV	Rate	$V_{CC} = 5V \pm 0.5V$	_	20	ns/V	

Note: 7. Unused inputs should be held at  $V_{CC}$  or Ground.

Currench al	Demonster	Toot Conditions	Maa		+25°C		-40°C to	o +85°C	-40°C to	+125°C	11
Symbol Parameter	Test Conditions	Vcc	Min	Тур	Max	Min	Max	Min	Max	Unit	
			2V	1.9	2	_	1.9	_	1.9	_	
		Іон = -50μА	3V	2.9	3	_	2.9	_	2.9	_	
Vон	High Level		4.5V	4.4	4.5	_	4.4	_	4.4	_	V
••••	Output Voltage	I <sub>OH</sub> = -4mA	3V	2.58		_	2.48	_	2.40	_	
	Iон = -8mA	4.5V	3.94	_		3.8		3.70	_		
		IOL = 50µA	2V	_	_	0.1	_	0.1	_	0.1	-
			3V	_	_	0.1	_	0.1		0.1	
Vol	Low Level Output		4.5V	_	_	0.1	—	0.1	—	0.1	V
	Voltage	IoL = 4mA	3V	—		0.36	_	0.44	_	0.55	-
		Iol = 8mA	4.5V	_		0.36	—	0.44	_	0.55	
II.	Input Current	$V_I = 5.5V$ or GND	0 to 5.5V	_	_	±0.1	_	±1	_	±2	μA
lcc	Supply Current	VI = 5.5V or GND Io = 0	5.5V	_	_	1	_	10	_	40	μA
Cı	Input Capacitance	VI = VCC or GND	5.5V	_	2.0	10	_	10	_	10	pF



# **Package Characteristics**

Symbol	Parameter	Package Test Conditions		Min	Тур	Max	Unit
0	Thermal Resistance	SOT25	Note 0		184	—	****
θја	Junction-to-Ambient	SOT353	Note 8		385	—	°C/W
0	Thermal Resistance	SOT25	Note 0		62	_	00444
θις	Junction-to-Case	SOT353	Note 8	_	164	_	°C/W

Note: 8. Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.

# **Switching Characteristics**

Vcc = 3.3V ± 0.3V (See Figure 1)

Parameter	eter From To				+25°C			-40°C to +85°C		-40°C to +125°C	
(Input)	(Input)	ut) (Output)	Conditions	Min	Тур	Max	Min	Мах	Min	Мах	
tPD A or B	or B Y	CL = 15pF	0.6	4.0	11.0	0.6	13.0	0.6	14.0	ns	
		CL = 50pF	0.6	5.8	14.5	0.6	16.5	0.6	18.5	ns	

#### Vcc = 5V ± 0.5V (See Figure 1)

Parameter From (Input)	-	То	Test		+25°C		-40°C to	o +85°C	-40°C to	o +125°C	Unit
	(Input)	(Output)	Conditions	Min	Тур	Max	Min	Мах	Min	Max	
tPD A or B	Y	$C_L = 15 pF$	0.6	3.4	6.8	0.6	8.0	0.6	8.5	ns	
		$C_L = 50 pF$	0.6	4.9	8.8	0.6	10.0	0.6	11.5	ns	


# **Operating Characteristics**

 $T_A = +25^{\circ}C$ 


Parameter		Test Conditions	V <sub>CC</sub> = 5V Typ	Unit
Cpd	Power Dissipation Capacitance	f = 1MHz No Load	10	pF





### **Measurement Information**



Vcc	In	puts	VM	CL	
VCC	VI	tr/tr	¥ WI	UL	
3.3V±0.3V	Vcc	≤3ns	Vcc/2	15pF	
5V±0.5V	Vcc	≤3ns	Vcc/2	15pF	
3.3V±0.3V	Vcc	≤3ns	Vcc/2	50pF	
5V±0.5V	Vcc	≤3ns	Vcc/2	50pF	





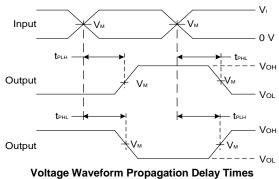


Inverting and Non-Inverting Outputs



- Notes:
- A. Includes test lead and test apparatus capacitance.
  B. All pulses are supplied at pulse repetition rate ≤ 1MHz.
  C. Inputs are measured separately one transition per measurement.
  - D.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{PD}$ .



### Ordering Information (Note 9)

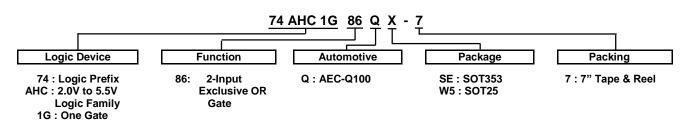


Part Number	Package	Package	Package Size	7" Таре	and Reel
i alt Nulliber	Code	(Notes 10 & 11)	i ackage size	Quantity	Part Number Suffix
74AHC1G86QSE-7	SE	SOT353	2.15mm × 2.1mm × 1.1mm 0.65mm lead pitch	3000/Tape & Reel	-7
74AHC1G86QW5-7	W5	SOT25	3.0mm × 2.8mm × 1.2mm 0.95mm lead pitch	3000/Tape & Reel	-7

Notes:

For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.
 Pad layout as shown in Diodes Incorporated's package outline PDFs, which can be found on our website at http://www.diodes.com/package-outlines.html.
 The taping orientation is located on our website at https://www.diodes.com/assets/Packaging-Support-Docs/ap02007.pdf.

### **Marking Information**



	Identification Code Year 0~9
W :	Week: A~Z 1~26 week
—	a~z 27~52 week z represents week 52 and 53
<u>x</u> :	A~ Z: Internal Code


Part Number	Package Identification Cod	
74AHC1G86QW5-7	SOT25	YXQ
74AHC1G86QSE-7	SOT353	YXQ



# **Package Outline Dimensions**


Please see http://www.diodes.com/package-outlines.html for the latest version.

(1) Package Type: SOT25

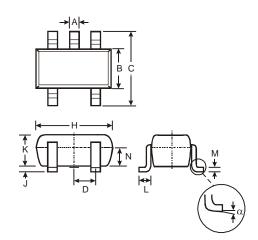

SOT25			
Dim	Min	Max	Тур
Α	0.35	0.50	0.38
В	1.50	1.70	1.60
С	2.70	3.00	2.80
D	-	-	0.95
н	2.90	3.10	3.00
J	0.013	0.10	0.05
К	1.00	1.30	1.10
L	0.35	0.55	0.40
м	0.10	0.20	0.15
Ν	0.70	0.80	0.75
α	0°	8°	-
All Dimensions in mm			

#### (2) Package Type: SOT353

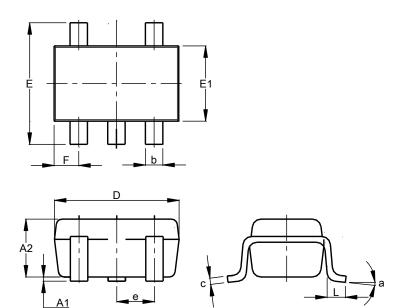


SOT353			
Dim	Min	Max	Тур
A1	0.00	0.10	0.05
A2	0.90	1.00	0.95
b	0.10	0.30	0.25
С	0.10	0.22	0.11
D	1.80	2.20	2.15
E	2.00	2.20	2.10
E1	1.15	1.35	1.30
е	0.650 BSC		
F	0.40	0.45	0.425
L	0.25	0.40	0.30
а	0°	8°	
All Dimensions in mm			



# **Suggested Pad Layout**


Please see http://www.diodes.com/package-outlines.html for the latest version.

(1) Package Type: SOT25



Dimensions	Value
Z	3.20
G	1.60
Х	0.55
Y	0.80
C1	2.40
C2	0.95

#### (2) Package Type: SOT353



Dimensions	Value (in mm)
С	0.650
C1	1.900
G	1.300
Х	0.420
X1	1.720
Y	0.600
Y1	2.500

#### **Mechanical Data**

#### SOT25

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 3
- Weight: 0.0158 grams (Approximate)

#### SOT353

- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 3
- Weight: 0.0064 grams (Approximate)



#### IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2020, Diodes Incorporated

#### www.diodes.com