San Ace 40 9CRJ type

Counter Rotating Fan

Features

High Static Pressure and High Airflow

This fan delivers a maximum static pressure of 2400 Pa and a maximum airflow of $1.06 \, \text{m}^3 / \text{min}$.

Compared with our current model,* the maximum static pressure has increased by 1.4 times and the maximum airflow has increased by 1.1 times.

This fan can efficiently cool high-density equipment that is hard to ventilate, contributing to system downsizing.

Energy Saving

Power consumption has been reduced by approximately 20% compared with the current model.*

The PWM control function enables the control of fan speed, contributing to energy saving.

* San Ace 40 9CRH type $40 \times 40 \times 56$ mm Counter Rotating Fan (model: 9CRH0412P5J001).





40×40×56 mm

Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated s [min Inlet		Max. ai [m³/min]	irflow [CFM]	Max. stat [Pa]	ic pressure [inchH ₂ O]	SPL [dB(A)]	Operating temperature [°C]	Expected life [h]
9CRJ0412P5J001	12	10.8 to 12.6	100	3.1	37.2	36200	32000	1.06	37.4	2400	9.64	72	-20 to +70	30000/60°C (53000/40°C)
			20	0.1	1.2	4500	4000	0.11	3.9	40	0.16	28		

^{*} PWM input frequency is 25 kHz; models without specifications at 0% PWM duty cycle have zero fan speed at 0%.

Models with the following sensor specifications are also available as options: Without sensor Lock sensor

Common Specifications

 □ Material
 Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-0)

 □ Expected life
 Refer to specifications

 (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)

 Expected life at 40°C is for reference only.

 □ Motor protection function
 Locked rotor burnout protection, Reverse polarity protection

 □ Dielectric strength
 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)

 □ Insulation resistance
 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)

 □ Sound pressure level (SPL)
 At 1 m away from the air inlet

 □ Operating temperature
 Refer to specifications (Non-condensing)


 □ Storage temperature
 -30 to +70°C (Non-condensing)

 □ Lead wire
 Inlet ⊕ Red ⊕ Black (Sensor) Yellow (Control) Brown


 Outlet ⊕ Orange ⊕ Gray (Sensor) Purple (Control) White

Airflow - Static Pressure Characteristics


PWM duty cycle



Operating voltage range




PWM Duty -Speed Characteristics Example



PWM Input Signal Example

Input signal waveform



 $\begin{array}{l} V^{\text{IH}}=2.8~to~5.25~V \quad V^{\text{IL}}=0~to~0.4~V \\ PWM~duty~cycle~(\%)=\frac{T_1}{T}\times100 \qquad PWM~frequency~25~(kHz)=\frac{1}{T} \\ Current~source~(Isource)=2~mA~max.~(when~control~voltage~is~0~V) \\ Current~sink~(Isink)=2~mA~max.~(when~control~voltage~is~5.25~V) \end{array}$


Control terminal voltage = 5.25 V max. (when control terminal is open)

When the control terminal is open,

fan speed is the same as when PWM duty cycle is 100%.


Either TTL input, open collector or open drain can be used for PWM control input signal.

Example of Connection Schematic




Specifications for Pulse Sensors

Output circuit: Open collector

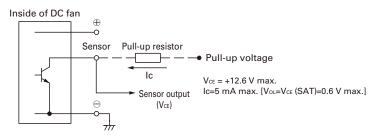


Output waveform (Need pull-up resistor)

In case of steady running

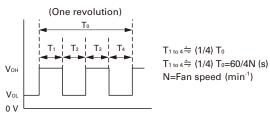


Dimensions (unit: mm)

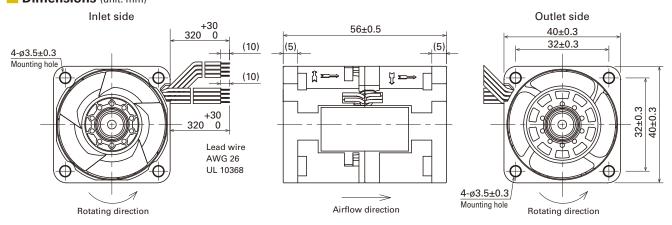

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side



Notice

- Please read the "Safety Precautions" on our website before using the product.
- The products shown in this catalog are subject to Japanese Export Control Law. Diversion contrary to the law of exporting country is prohibited.
- •For protecting fan bearings against electrolytic corrosion near strong electromagnetic noise sources, we provide effective countermeasures such as Electrolytic Corrosion Proof Fans and EMC guards. Contact us for details.

SANYO DENKI CO., LTD. 3-33-1 Minami-Otsuka, Toshima-ku, Tokyo 170-8451, Japan TEL: +81 3 5927 1020

https://www.sanyodenki.com

The names of companies and/or their products specified in this catalog are the trade names, and/or trademarks and/or registered trademarks of such respective companies. "San Ace" is a trademark of SANYO DENKI CO.,LTD.