

6

-20 °C to 130 °C

power

6000 V

500

3

TTT

FKM

2000 m

max. 75 A* 630V (AC/DC)

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

PA, UL 94/V0

when connected IP 66/67

zinc diecast / nickel plated

signal

4000 V

max. 30 A* 250 V (AC/DC)

Technical Data

Electrical Data

rated insulation voltage (L-L)

number of pins

rated current rated voltage

mating cycles

pollution degree

Material

insulation insert

housing

seals

over voltage category

max. height for operation

temperature range protection type

940 Receptacle

speedtec - ready


6-pin Earth-to-Housing Connection according to VDE 0627 flange mount /Flange 40x40 Anti-vibration o-ring

C EG A 257 NN 00 00 0056 000 C E A 257 N 00 00 0056 000



Contact Arrangement mating view





Tools (not part of product contents)

© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.


While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH Be Connectivity Industrial Gmbh Bernrieder Straße 15 94559 Niederwinkling, Deutschland Tel.: +49 9962 2002-0 Fax: +49 9962 2002-70 E-Mail: intercontec@te.com Web: www.intercontec.biz

ssue: 03.09.2018



61.4

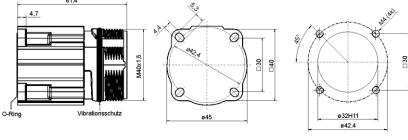

Main Dimensions Receptacle

*for max, wire cross-section pay attention to the cross-section of used contacts