

#### LOW DROPOUT VOLTAGE LINEAR LED DRIVER IC IN SOT26


### **Description**

This Linear LED driver is designed to meet the stringent requirements of automotive applications.

The BCR430UW6Q is a monolithically integrated linear LED controller designed to function as a Constant Current Regulator (CCR) for linear LED driving. The device operates over a voltage range from 5V to 42V and regulates the output LED current up to 100mA, set by an external resistor. It is designed for driving LEDs in strings and will reduce current at increasing temperatures to self-protect. The low voltage drop during current regulation allows efficient driving of LED strings with a range of forward voltages and supply voltage tolerances.

# **Applications**

Automotive Lighting



### Typical Configuration

#### **Features**

- LED Current Tolerance of ±5% at 95mA Output Current
- Thermal Protection Reduces LED Current at Elevated Temperature
- Low Typical Saturation Voltage of 115mV at 50mA
- 5mA to 100mA Adjustable LED Current with an External Resistor
- 5V to 42V Supply Voltage
- High Power 1W Dissipation in SOT26
- No External Capacitor is Required for Stable Operation
- LED Dimming Using PWM
- Parallel Devices to Increase Regulated Current
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- The BCR430UW6Q is suitable for automotive applications requiring specific change control; this part is AEC-Q100 qualified, PPAP capable, and manufactured in IATF16949 certified facilities.

https://www.diodes.com/quality/product-definitions/

#### **Mechanical Data**

- Case: SOT26
- Case Material: Molded Plastic. "Green" Molding Compound.
   UL Flammability Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin-Plated Leads.
   Solderable per MIL-STD-202, Method 208 (€3)
- Weight: 0.018 grams (Approximate)



SOT26

### **Ordering Information** (Note 4)


Part Number	Compliance	Marking	Reel Size (inches)	Tape Width (mm)	Quantity per Reel
BCR430UW6Q-7	Automotive	430	7	8	3,000

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.



## **Marking Information**




 $\frac{430 = \text{Part Marking (See Ordering Information)}}{\overline{Y}M = \text{Date Code Marking}}$  $\overline{Y} = \text{Year (ex: I = 2021)}$ 

M = Month (ex: 9 = September)

Date Code Key

Year	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031
Code	Н	I	J	K	L	М	N	0	Р	R	S	T
Month	Jan	Feb	Mar	Apr	Mav	Jun	Jul	Aug	Sep	Oct	Nov	Dec

# **Pinout Diagram**




Top View: SOT26

## **Pin Description**

Pin Number	Pin Name	Function
1	NC	Not Connected
2	GND	Power Ground
3	REXT	External Resistor for Adjusting Output Current
4	VS	Supply Voltage
5	NC	Not Connected
6	OUT	IOUT - Regulated Output Current

# **Functional Block Diagram**



2 of 9 BCR430UW6Q www.diodes.com Datasheet number: DS42783 Rev. 2 - 2



### Absolute Maximum Ratings (Voltage relative to GND, @TA = +25°C, unless otherwise specified.)

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vs	-0.5	45	V
Output Current	Іоит	0	100	mA
Output Voltage	V <sub>OUT</sub>	-0.5	42	V
R <sub>EXT</sub> Current	I <sub>REXT</sub>	0	0.3	mA
Rext Voltage	VREXT	-0.5	5	V

### **Recommended Operating Conditions**

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vs	5	42	V
OUT Pin Voltage Range	Vouт	0.5	40	V
Output Current (Note 6)	l <sub>OUT</sub>	5	100	mA
Ambient Temperature Range (Notes 5 & 6)	TA	-40	+125	°C
Normal Operation Junction Temperature Range (Note 7)	TJ	-40	+125	°C

### Thermal Characteristics (@TA = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit		
Dower Discipation	(Note 7)	D-	922	mW	
Power Dissipation	(Note 8)	PD	993	IIIVV	
Thermal Decistance, Junction to Ambient	(Note 7)	Davis	136		
Thermal Resistance, Junction to Ambient	(Note 8)	RθJA	126	°C/W	
Thermal Resistance, Junction to Lead	(Note 9)	Rejl	88.5		
Operating Junction Temperature		TJ	-40 to +150	°C	
Recommended Storage Temperature		Ts	-55 to +165	°C	

### ESD Ratings (Note 10)

Characteristics	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge – Human Body Model	НВМ	2000	V	2
Charge Device Model	CDM	1000	V	C5

Notes:

- 5. Subject to the device junction temperature not exceeding the onset point of Over Temperature Protection (OTP) operation. The OTP operation typically starts at +125°C, but can start as low as +100°C or as high as +140°C.
- 6. A typical device will operate at its defined output current (set by Rext) up to a junction temperature of +125°C. However, if the combination of power dissipation and ambient temperature drives T<sub>J</sub> above +125°, the output current will be reduced linearly with temperature, reaching zero output current at +150°C.
- 7. For a device mounted on MRP FR4-PCB; device is measured under still air conditions whilst operating in a steady-state.
- 8. Same as Note 7, except the device is mounted on 25mm  $\times$  25mm 2oz copper.
- 9.  $R_{\theta JL}$  = Thermal resistance from junction to solder-point (at the end of the OUT leads).
- 10. Refer to JEDEC specification JESD22-A114 and JESD22-A115.



# Electrical Characteristics (@TA = +25°C, unless otherwise specified.)

Characteristic	Symbol	Min	Тур	Max	Unit	Tes	t Condition
Supply Voltage	Vs	5	_	42	V	_	
Supply Current (Note 11)	la.	180	261	400	μΑ	IOUT = 50mA, V	s = 5V
Supply Current (Note 11)	ls	_	285	500	μΑ	I <sub>OUT</sub> = 50mA, V	s = 42V
Quiescent Current	IQ	40	67	100	μΑ	Vs = 42V; Rext = open	
Output Current Range	Іоит	5	_	100	mA	_	
		18	20.8	22.7	mA	$R_{EXT} = 30k\Omega$	
Output Current, Set by R <sub>EXT</sub> (Note 11)	Іоит	45.7	49.1	52.3	mA	$R_{EXT} = 12.7k\Omega$	Vout > 1V; Vs ≥ 5V
(Note 11)		90	95.3	100	mA	$R_{EXT} = 6.49 k\Omega$	
Driver Voltage Drop (Note 11)	Vout-min	50	115	200	mV	Iout = 50mA	
REXT Pin Voltage (Note 11)	V	0.880	0.903	0.960	V	$R_{EXT} = 300k\Omega$	
REXT FIII Voltage (Note 11)	VREXT	0.875	0.892	0.955	V	$R_{EXT} = 6.49 k\Omega$	
Thermal Knee Junction Temperature (Note 12)	Τĸ	_	+125	_	°C	_	
Output Current Change	(ΔІоит/Іоит) /		0.0032		%/°C	T <sub>J</sub> > -40°C; T <sub>J</sub> =	= +120°C;
vs. Temperature	ΔTJ		0.0032	_	/6/ C	I <sub>OUT</sub> = 50mA	
Output Current Change	(Δlouт/lout) /	_	0.0055	_	%/V	IOUT = 50mA;	
vs. Supply Voltage or Output Voltage	ΔV		3.2000		, 3, 1	5V < Vs < 42V	or 1V < Vout < 40V


Notes:

<sup>11.</sup> Measured under pulsed conditions. Pulse width ≤ 300μs. Duty cycle ≤ 2%.


12. Thermal Knee Junction Temperature is defined as the asymptotic intersection of the +25°C temperature I<sub>OUT</sub> current and the I<sub>OUT</sub> current in overtemperature protection mode.



# Typical Thermal Characteristics (@TA = +25°C, unless otherwise specified.)



### **Derating Curve**





Ta=25°C
25mm x25mm FR4 PC board, 202.

110
20 Del 100
21 Del 100
21 Del 100
22 Del 100
23 Del 100
24 Del 100
25 Del 100
26 Del 100
27 Del 100
28 Del 100
29 Del 100
20 Del 100

**Transient Thermal Resistance** 

**Transient Thermal Resistance** 

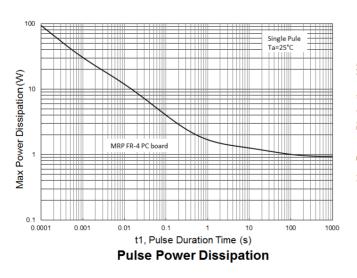





**Pulse Power Dissipation** 





## Typical Electrical Characteristics (continued) (@TA = +25°C, unless otherwise specified.)

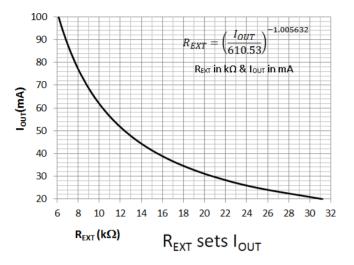





The LED current is set according to the resistor value which is connected to the REXT pin.






T<sub>JUNCTION</sub> vs I<sub>OUT</sub> with Shutdown








 $V_{\rm OUT}$  vs  $I_{\rm OUT}$ 

Extended Vout vs Iout




# **Application Information**

### **Typical Application Circuit**




No external capacitor is required for stable operation. Suitable for diming with VS or REXT pin modulation.

Switching / Timing Information (@ $V_S = 10V$ ,  $V_{OUT} = 1V$ , 1kHz, 50% Mark-Space ratio,  $R_{EXT}$  modulation.)

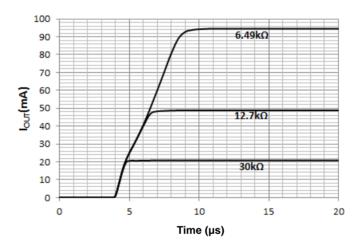

For  $R_{EXT}=6.49k\Omega$ ,  $t_R=14\mu s$  at -40°C,  $9\mu s$  at +25°C and  $7\mu s$  at +110°C. Rise time does not change significantly with LED loads (delay increases by less than  $2\mu s$ ).

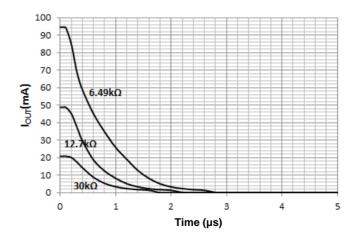


Fall time is independent of temperature. Fall time does not change significantly with LED loads.



## **Package Outline Dimensions**

Please see https://www.diodes.com/package-outlines.html for the latest version.

### SOT26

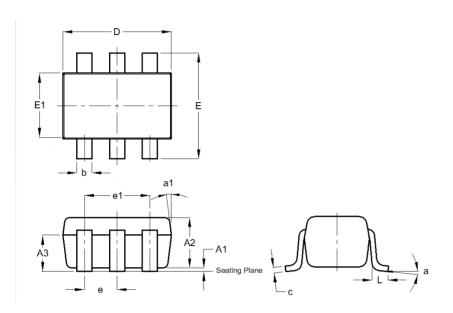


	SOT26						
Dim	Min	Max	Тур				
A1	0.013	0.10	0.05				
A2	1.00	1.30	1.10				
A3	0.70	0.80	0.75				
b	0.35	0.50	0.38				
С	0.10	0.20	0.15				
D	2.90	3.10	3.00				
е	-	-	0.95				
e1	-	-	1.90				
Е	2.70	3.00	2.80				
E1	1.50	1.70	1.60				
L	0.35	0.55	0.40				
а	-	-	8°				
a1	-	-	7°				
All	Dimen	sions i	in mm				

## **Suggested Pad Layout**

Please see https://www.diodes.com/package-outlines.html for the latest version.

#### SOT26



Dimensions	Value (in mm)
С	2.40
C1	0.95
G	1.60
Х	0.55
Y	0.80
V1	3 20



#### **IMPORTANT NOTICE**

- 1. DIODES INCORPORATED AND ITS SUBSIDIARIES ("DIODES") MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
- 2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes products. Diodes products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of the Diodes products for their intended applications, (c) ensuring their applications, which incorporate Diodes products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
- 3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
- 4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
- 5. Diodes products are provided subject to Diodes' Standard Terms and Conditions of Sale (<a href="https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/">https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/</a>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- 6. Diodes products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
- 7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
- 8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

Copyright © 2021 Diodes Incorporated

www.diodes.com