


OSLON® Pure 1010 RGBW and Tuneable White (TW) PowerStars

ILH-OP04-xxxx-PC221-WIR200.

At the heart of each PowerStar are 4 OSLON® Pure 1010 chip scale LEDs. OSLON® Pure 1010 can be driven up to 700mA while OSRAM's latest power chip technology remains efficient even at the highest drive currents. OSLON® Pure 1010 LEDs are lambertian emitters and a real chip scale package presenting the highest luminance available on the market.

PowerStars are available in RGBW (Red, Green, Blue and White) or TW (2700K, 3000K, 4000K and 6500K). Each LED can be individually controlled allowing users to produce a wide range of colours. A low thermal resistance of 7.2K/W ensures cool running and a highly efficient product. PowerStars are compact, powerful LED light sources built on aluminium substrates for optimal thermal management. Available with 200mm wires as standard.

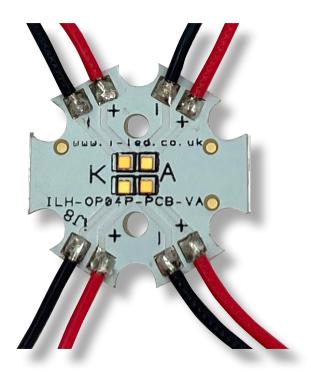

CONTENTS

Applications	page 2	Heatsink Options	page 6
Technical Features	page 2	Power Supply Options	page 6
Product Options	page 3	Thermal Interface Material Options	page 7
Minimum and Maximum Ratings	page 3	Assembly Information	page 7
Accessories	page 4	Important Information and Precautions	page 7
Technical Drawings	page 5	Safety Information	page 8
IED Radiation Diggram	page 5		







APPLICATIONS

- » General lighting
- » Decorative lighting
- » Task lighting
- » Spot lighting

- » Downlighters
- » Retail lighting
- » Entertainment lighting
- » Human centric lighting

TECHNICAL FEATURES

LED Family	OSLON® Pure 1010
Lifetime	Up to 100,000 hours lifetime to 70% of original brightness
Mounting	Mounting holes using M3 screws allows easy installation
Dimensions (L x W x H)	20 x 20 x 1.7mm
Wiring	Available with 8x 200mm wires
Heatsinks	Required over 350mA. Suitable options on <u>page 6</u> or visit <u>our website</u> for a full range
Power Supply	4 - 75W dimming and non dimming. Suitable options on <u>page 7</u> or visit <u>our website</u> for a full range
Chain	PowerStars can be linked together to produce longer chains
Current Range	Whites 100-700mA Colours 30-1000mA
Thermal Resistance	7.2K/W
Configuration	4 individual connected LEDs





PRODUCT OPTIONS

ILS Part Number	Colour	Colour Temp or Dominant Wavelenght	Typical Power W §	Forward Voltage	Flux † at 700mA	Radiance Angle	Relevant OSRAM LED Data
	Deep Blue	455nm	1.96W	2.7-3.2V	31lm	120° (±60°)	GD VJLPE1
	True Green	525nm	1.96W	2.7-3.2V	214lm	120° (±60°)	GT VJLPE1
ILH-OP04-RGBW-PC221-WIR200.	Red	630nm	1.96W	2.7-3.2V	43lm	120° (±60°)	GR VJLPE1
	Neutral White	4000K	1.96W	2.7-3.2V	112lm	120° (±60°)	GW VJLPE1.CM
	Hot White	2700K	1.96W	2.7-3.2V	90lm	120° (±60°)	GW VJLPE1.CM
ILH-OP04-HWUL-PC221-WIR200.	Warm White	3000K	1.96W	2.7-3.2V	105lm	120° (±60°)	GW VJLPE1.CM
	Neutral White	4000K	1.96W	2.7-3.2V	112lm	120° (±60°)	GW VJLPE1.CM
	Ultra White	6500K	1.96W	2.7-3.2V	142lm	120° (±60°)	GW VJLPE1.CM

Due to the special conditions of the manufacturing processes of LEDs, the typical data of technical parameters can only reflect overall statistical figures, and do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data.

§ Tolerance +/- 10%

MINIMUM AND MAXIMUM RATINGS

ILS Part Number	Operating Temperature at Tc-Point [° C]	Storage Temperature [° C]	Forward Current per chip [mA]	Reverse Voltage [Vdc]
ILH-OP04-RGBW-PC221-WIR200.	-40 °C ~ 100 °C	40 °C ~ 100 °C	Whites 100-700mA Colours 30-1000mA	Not designed for reverse operation
ILH-OP04-HWUL-PC221-WIR200.	-40 °C ~ 100 °C	40 °C ~ 100 °C	100-700mA	Not designed for reverse operation

Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED module. Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED module.

The temperature of the LED module must be measured at the Tc-Point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label.







 $[\]dagger$ Measured with 20mS 700mA pulse at 85 $^{\circ}\text{C}$

ACCESSORIES

Lenses



LEDiL precision-engineered lenses allow for rapid deployment of all types of light fixtures, including street lights, wall-wash, high-bay, sconces, emergency beacons, parking garage/low-bay, MR and AR downlights, and dock lights. Precision-engineered for maximum efficiency and durability, LEDiL lenses are released alongside the latest producs from our LED suppliers. Suitable options on page 6 or visit our website for a full range.

Heatsinks



ILS has a series of aluminium alloy heatsinks to be used with our standard range of PowerStars and PowerClusters.

These Heatsinks are supplied with fixing screws for the light engine and for fixing to a base plate. They also come with Thermal Interface Material (TIM) attached to the top surface. Suitable options on page 6 or visit our website for a full range.

Power Supplies

ILS has a comprehensive range of standard power supplies. The table below shows the total number of ILS products each power supply can drive. Additional Power Supplies are being introduced so please call us or check our website for the latest offering. Suitable options on page-7



Thermal Interface Material (TIM)

ILS has produced a range of high-performance, cost effective Thermal Interface Materials to perfectly match their standard products. Our product fills the air pockets between the two surfaces, forming a continuous layer to conduct heat away from the LED to the heatsink. ILS offers TIM in three options – double sided adhesive, single sided adhesive and non adhesive. Suitable options on page 7 or visit our website for a full range.








TECHNICAL DRAWINGS (MM)

3D drawing files are available on request from ILS. Please call or email

RADIATION OF SINGLE LED

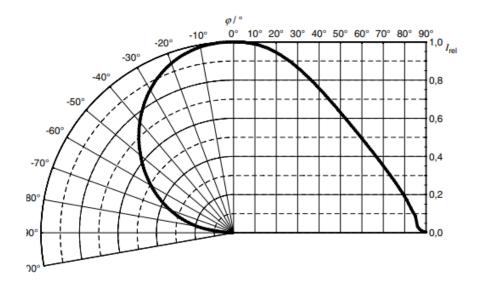








HEATSINK OPTIONS

ILS Product	350mA	700mA	1000mA
No heatsink, in free air			
ILA-HSINK-STAR-50X20MM			
ILA-HSINK-STAR-50X40MM			

KEY

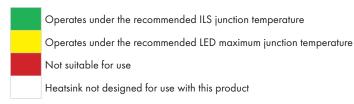

Click here to visit our website for our latest range

POWER SUPPLY OPTIONS

ILS has a comprehensive range of standard power supplies. The table below shows the total number of ILS products each power supply can drive.

Additional power supplies are being introduced so please call us or check our website for the latest offering.

	ILS Driver Part Number	Rating	Current	Output Voltage	Dimming
OC CC C	IZC070-004F-4065C-SAL	4W	700mA	2-6V	No
	ILA-4CHANNEL-LED-TUNER-001.	10W	10-500mA	20V	Yes via PSU
The same of	IZCVAR-040M-9020C-SAL	40W	350-1050mA	350mA 2-100V, 500mA 2-80V, 600mA 2-67V, 700mA 2-57V,900mA 2-45V, 1050mA 2-40V	0-10V, PWM and Resistance
I COSCAR I	OTI-DALI-10/220-240/700-NFC	10W	150-700mA	2.5-45V	DALI

Click here to visit our website for our latest range









THERMAL INTERFACE MATERIAL OPTIONS

Non Adhesive	Single Sided Adhesive	Double Sided Adhesive
ILA-TIM-STAR-OA	ILA-TIM-STAR-1A	ILA-TIM-STAR-2A.

Other sizes are available, including customised parts

Click here to visit our website for our latest range

ASSEMBLY INFORMATION

- » The mounting of the PowerStar has to be on a metal heatsink.
- » In order to optimise the thermal management, the metal surface needs to be clean (dirt and oil free) and planar for the best contact with the LED module. A thermal grease or heat transfer material is highly recommended.

IMPORTANT INFORMATION AND PRECAUTIONS



The PowerStar's LED, when powered up, is very bright. Thus it is advised that you do not look directly at it. Turn the PowerStar away from you and do not shine into the eyes of others.



PowerStars will overheat in operation if not attached to a suitable Heatsink. Overheating can cause failure or irreparable damage.



Do not operate PowerStars with a power supply with unlimited current. Connection to constant voltage Power Supplies that are not current limited may cause the PowerStar to consume current above the specified maximum and cause failure or irreparable damage.



PowerStars, when operated, can reach high temperatures thus there is risk of injury if they are touched.



DO NOT HOT PLUG ON LED SIDE OF POWER SUPPLY.



DO NOT TOUCH or PUSH on the LED as this can cause irreparable damage.







SAFETY INFORMATION



The LED module itself and all its components must not be mechanically stressed.



Assembly must not damage or destroy conducting paths on the circuit board.



The mounting of the module is carried out by attaching it at the mounting holes. Metal mounting screws must be insulated with synthetic washers to prevent circuit board damage and possible short circuiting.



To avoid mechanical damage to the connecting cables, the boards should be attached securely to the intended substrate. Heavy vibration should be avoided.



Observe correct polarity! Depending on the product, incorrect polarity will lead to emission of red or no light. The module can be destroyed!



Pay attention to standard ESD precautions when installing the PowerStars.



The PowerStars, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion. Damage by corrosion will not be accepted as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.



For outdoor usage, a housing is definitely required to protect the board against environmental influences. The design of the housing must correspond to the IP standards in the application. It is also the responsibility of the user to ensure any housings or modifications keep the Tc junction temperature to within stated ranges.



To also ease the luminaire/installation approval, electronic control gear for LED or LED modules should carry the CE mark and be ENEC certified. In Europe the declarations of conformity must include the following standards: CE: EC 61374-2-13, EN 55015, IEC 61547 and IEC 61000-3-2 - ENEC: 61374-2-13 and IEC/EN 62384.



The evaluation of eye safety occurs according to the standard IEC 62471:2006 ("photobiological safety of lamps and lamp systems"). Within the risk grouping system of this CIE standard, the LED specified in this datasheet falls into the class "moderate risk" (exposure time 0.25s). Under real circumstances (for exposure time, eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. As is also true when viewing other bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment and even accidents, depending on the situation.





FURTHER INFORMATION

The values contained in this datasheet can change due to technical innovation. Any such changes will be made without separate notification

If you require further assistance or have a specific or custom enquiry, please contact the ILS team via email or phone. Alternatively please visit our website for more product info and to see our full ranges.



Unit 2, Berkshire Business Centre, Berkshire Drive, Thatcham, Berkshire, RG19 4EW +44 (0)1635 294606

> info@i-led.co.uk https://i-led.co.uk

ABOUT ILS

ILS offers a high level of technical skill, professionalism and commercial understanding to companies requiring market-leading optoelectronics solutions. Offering conceptual advice, electronics design and manufacturing capability, we use high quality production resources both in-house and in Asia, providing project support from prototyping to mass production. We also understand the need to provide cost effective solutions and we do so using high quality components to ensure that the end product's reliability and quality is uncompromised. Apart from LEDs in the visible spectrum, we have a wide range of Infrared, UV LEDs, UV tubes, and lasers.

ILS is a division of Intelligent Group Solutions Ltd (IGS) a well-established respected industry leading Optoelectronics solutions provider. Much of IGS' business comes from providing semi-custom or custom products both in component and sub-assembly form, and from providing design support and prototyping within the European market place. We can deliver production displays to wherever in the world that the customer's manufacturing or assembly is being undertaken.

INTELLIGENT GROUP SOLUTIONS DIVISIONS

















