


Data sheet | Item number: 855-8004

Power tap; without fuse; 10 mm² (8 AWG) - 16 mm² (6 AWG); N-conductor

www.wago.com/855-8004

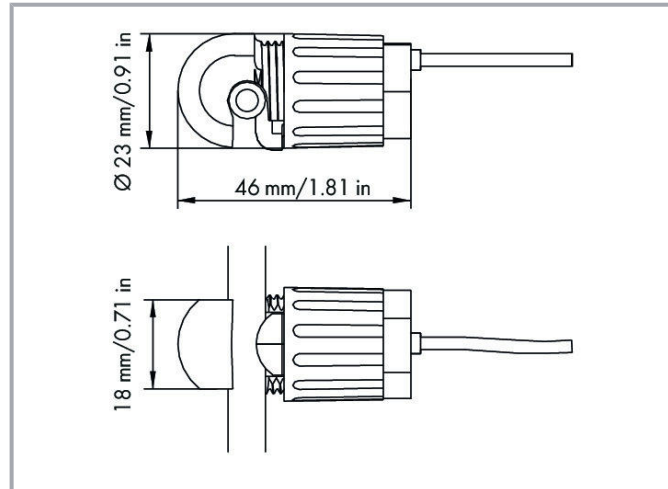

Item description

Short description:

These voltage taps (855 Series) easily and safely tap the measurement voltage.

This allows a fuse-protected measurement voltage to be tapped from an insulated conductor with just one turn – no tools required.

Features:

- Safely tap the measurement voltage with just one turn
- Tool-free assembly
- Secure mounting
- Voltage taps (855-8001 and 855-8003) include a (5 x 25) mm 2 A fuse
- For insulated conductors up to 16 mm² (6 AWG)
- Cable length: 3 m

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Data

Technical data

Output – voltage tap

Rated voltage	AC 400 V
Continuous current (max.)	2 A
Voltage drop at output (max.)	≤ AC 0.5 V
Fuse (voltage path)	-

Safety and protection

Rated surge voltage	6 kV
Overvoltage category	III
Pollution degree	2
Protection type	IP20

Test voltage

Test voltage	AC 3 kV; 50 Hz; 1 min
--------------	-----------------------

Connection data

Connection technology	IDC
Solid conductor	10 ... 16 mm ² / 8 ... 6 AWG
Fine-stranded conductor	10 ... 16 mm ² / 8 ... 6 AWG
Feedthrough for measurement conductor	Ø 5 ... 7 mm
Cable type	Secondary side: 1 x 1.0 mm ² ; flexible; with ferrule

Physical data

Width	23 mm / 0.906 inch
Height	50 mm / 1.969 inch
Depth	23 mm / 0.906 inch
Cable length	3 m

Mechanical data

Mounting type	Insulation displacement connection (IDC)
Mounting type	Mounting on insulated round cable
Usability	Can be reused several times (max. 24 times)

Subject to changes. Please also observe the further product documentation!



Material data

Flammability class per UL94	V2
Housing material	PA 66
Weight	21 g

Environmental requirements

Pollution degree	2
Surrounding air temperature (operation)	-5 ... 55 °C
Surrounding air temperature (storage)	-20 ... 70 °C
Relative humidity	5 ... 85 % (without condensation)
Operating altitude (max.)	2000 m

Standards and specifications

Conformity marking	CE
Standards/Specifications	EN 60947-7-1

Commercial data

PU (SPU)	10 (1) Stück
Packaging type	box
Country of origin	NL
GTIN	4055143378840
Customs tariff number	85366990990

Optional accessories

General accessories

	Item no.: 2007-8873 Compact terminal block; for current and voltage transformers; 6,00 mm ² ; multicoloured	www.wago.com/2007-8873
	Item no.: 2007-8874 Compact terminal block; for current and voltage transformers; 6,00 mm ² ; multicoloured	www.wago.com/2007-8874
	Item no.: 2007-8875 Compact terminal block; for current transformer circuit; 6,00 mm ² ; multicoloured	www.wago.com/2007-8875
	Item no.: 2007-8876 Compact terminal block; for 3-phase current transformer circuit; 6,00 mm ² ; multicoloured	www.wago.com/2007-8876
	Item no.: 2007-8877 Compact terminal block; for current transformer circuit; 6,00 mm ² ; multicoloured	www.wago.com/2007-8877
	Item no.: 2857-570/024-000	

Subject to changes. Please also observe the further product documentation!



3-Phase Power Measurement Module; 3x400/690 V/RC; Modbus RTU; Digital output; Configuration via software; Supply voltage: 24 VDC www.wago.com/2857-570/024-000



Item no.: 2857-570/024-001
3-Phase Power Measurement Module; 3x400/690 V/1 A; Modbus RTU; Digital output; Configuration via software; Supply voltage: 24 VDC www.wago.com/2857-570/024-001



Item no.: 2857-570/024-005
3-Phase Power Measurement Module; 3x400/690 V/5 A; Modbus RTU; Digital output; Configuration via software; Supply voltage: 24 VDC www.wago.com/2857-570/024-005



Item no.: 857-560
Voltage signal conditioner; Voltage input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width www.wago.com/857-560



Item no.: 857-569
Power signal conditioner; Current and voltage input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width www.wago.com/857-569

Downloads

Documentation

Bid Text

Item no.	Date	File name	Size	Action
855-8004	20 Feb 2019	docx	17.6 kB	Download

docx - Datei

855-8004	19 Feb 2019	xml	5.1 kB	Download
----------	-------------	-----	--------	----------

X81 - Datei

Instruction Leaflet

Potentialabgriffe	pdf	79.6 kB	Download
-------------------	-----	---------	----------

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf	265.8 kB	Download
--	---------	-----	----------	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 855-8004	URL	Download
---	-----	----------

Power tap; without fuse; 10 mm² (8 AWG) - 16 mm² (6 AWG); N-conductor

Subject to changes. Please also observe the further product documentation!



Installation Notes

Installation



Installation on an insulated conductor with insulation displacement connection (IDC)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.