



35W CONVECTION COOLED

The LCW series of regulated output convection cooled AC-DC power supplies are designed to provide a cost effective solution for industrial electronics, technology and household applications. Features include wide range AC input from 85-305VAC, output voltage adjustment, low stand-by power consumption, output short circuit protection, over current and over voltage protection. Applications include auxiliary power sources, security installations, lighting control, smart home or office control systems, ticketing and vending applications.

Features

- 35W convection cooled
- Integrated connector cover
- ITE, industrial & household approvals
- Class B conducted & radiated emissions
- Input voltage range 85-305VAC
- Regulated single outputs from 5.0V to 24VDC
- Output voltage trim ±10%
- Efficiency to 88%
- Short circuit, overvoltage & overload protection
- Conformal coating option
- -30°C to +70°C operating temperature
- 3 year warranty

AC-DC POWER SUPPLIES



Applications









Household Appliances

Industrial Instrumentation Technology Electronics

Dimensions

3.64" x 3.22" x 1.18" (92.5 x 82.0 x 30.0mm)

Models & Ratings

Model Number(3)	Outp	out Voltage	Output Current	Ripple & Noise	Efficiency ⁽²⁾	Maximum	Power
Model Nulliber	Nominal	Adjustment Range ⁽⁴⁾	Output Current	pk to pk ⁽¹⁾	Efficiency	Capacitive Load	
LCW35US05	5.0V	4.5 - 5.5V	7.0A	80mV	86%	8000µF	35W
LCW35US12	12.0V	10.8 - 13.2V	3.0A	120mV	88%	1500µF	35W
LCW35US15	15.0V	13.5 - 16.5V	2.4A	120mV	86%	1000μF	35W
LCW35US24	24.0V	21.6 - 26.4V	1.5A	150mV	87%	750µF	35W

Notes:

- $1.\ Ripple\ \&\ noise\ measured\ with\ 20MHz\ bandwidth\ and\ 47\mu F\ electrolytic\ capacitor\ in\ parallel\ with\ 0.1\mu F\ ceramic\ capacitor.$
- 2. Typical efficiencies measured at 230VAC full load.
- 3. Add suffix -E to model number to specify conformal coating option, MOQ applies, please contact sales.
- 4. Output power rating must not be exceeded.

─ LCW35 Series

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
	85	115/230	305	VAC	Derate output power linearly from 100% at 100VAC to 80% at 85VAC
Input Voltage - Operating	120		430	VDC	Alternative input. Not to be used in addition to AC input. DC input not included in safety approvals, external DC rated fuse required. Derate output power linearly from 100% at 140VDC to 80% at 120VDC
Input Frequency	47	50/60	63	Hz	
Innest Comment Full Load			0.8	А	115VAC
Input Current - Full Load			0.6		230VAC
No Load Input Power			0.3	W	
Inwards Comment		30		^	115VAC cold start at 25°C ambient
Inrush Current		50		Α	230VAC cold start at 25°C ambient
Earth Leakage Current			0.75	mA	277VAC/50Hz (Typ)
Input Protection	T2.0A/300VAC Internal fuse fitted in line				

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Co	onditions
Output Voltage	4.5		26.4	VDC	See Models	s & Ratings table
Initial Cat Assume		±2		%		LCW35US05
Initial Set Accuracy		±1		%	Full load	All other models
Voltage Adjustment		±10		%		
Minimum Load	0			А	No minimur	m load required
Start Up Delay	58		130	ms	115VAC full	lload
Start Op Delay	60		138	1115	230VAC full	ll load
Hold Up Time		8		ms	115VAC	
noid up Time		30		1115	230VAC	
Drift			±0.03	%	After 20 mii	nutes warm up, 230VAC, 0°C to 50°C
Line Regulation		±0.5		%	100-264VA	C, full load
Load Regulation			±1.0	%	0-100% LC	LCW35US03/05
Load negulation			±0.5		load	All other models
Transient Response			10	%	Recovery w step	vithin 1% in less than 5ms for a 50-75% and 75-50% loa
Ripple & Noise				mV pk-pk	See Models	s & Ratings table
Over/Undershoot			10	%	Full load 5n	ns recovery
			6.3		LCW35US0	05
Owner-there Donto-ties			16.2		LCW35US1	
Overvoltage Protection			21.7		LCW35US1	Hiccup mode, auto recovery
			33.6		LCW35US2	24
Overload Protection	110		200	%	Nominal ou	utput current, auto recovery
Temperature Coefficient		±0.03	5	%/°C		
Short Circuit Protection	Continuous,	hiccup with	auto recovery			



General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions	
Efficiency		86		%	230VAC Full load (see Models & Ratings table)	
Isolation: Input to Output	4000			VAC		
Input to Ground	2000			VAC	Class I construction	
Output to Ground	1250			VAC		
Switching Frequency		65		kHz		
Power Density			2.52	W/in³		
Mean Time Between Failure	300			khrs	MIL-HDBK-217F, Notice 2 25°C GB	
Weight		0.374 (170)		lb(g)		
Case Material	Aluminium	Aluminium chassis with vented galvanized steel cover				
Conformal Coating Option	Acrylic resi	Acrylic resin, UL94V-0 rated, certified (UL No. E351072), minimum 30µm coating thickness. Add suffix -E to part number				

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-30		+70	°C	See derating curve
Storage Temperature	-40		+85	°C	
Cooling	Natural con	vection			
Humidity	5		90	%RH	Non-condensing
Operating Altitude			5000	m	
Shock and Vibration	Tested according to EN60068-2-27, 10 - 500Hz, 5g (1H) for each X, Y and Z plane				

EMC: Emissions

Phenomenon	Standard	Test Level	Notes & Conditions
Conducted	EN55032	Class B	
Radiated	EN55032	Class B	

EMC: Immunity

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
ESD Immunity	EN61000-4-2	3	Α	Contact ±6kV/Air ±8kV
Radiated Immunity	EN61000-4-3	3	Α	10V/m
EFT	EN61000-4-4	3	Α	±2kV
Surge	EN61000-4-5	Installation class 4	Α	Line to line ±2kV, line to ground ±4kV
Conducted	EN61000-4-6	3	Α	10Vrms
	EN61000-4-11	Dip. 100% (0VAC), 10ms	Α	
		Dip. 100% (0VAC), 20ms	В	
Dips		Dip. 60% (88VAC), 200ms	Α	
		Dip. 30% (154VAC), 500ms	Α	
		Dip. 20% (176VAC), 5000ms	Α	
Interrupt		Int. 100% (0VAC), 5000ms	В	




Safety Approvals


Certification	Standard	Notes & Conditions
UL	UL62368-1	Information Technology
EN	EN62368-1, EN60335, EN61558	Information Technology and Household
CE	Meets all applicable directives	
UKCA	Meets all applicable legislation	


Application Notes

Temperature Derating

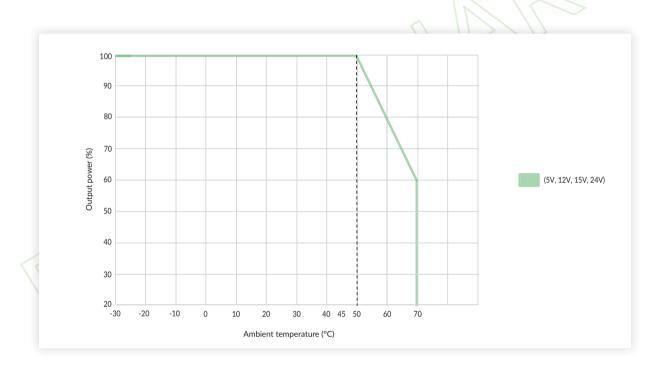

Mechanical Details

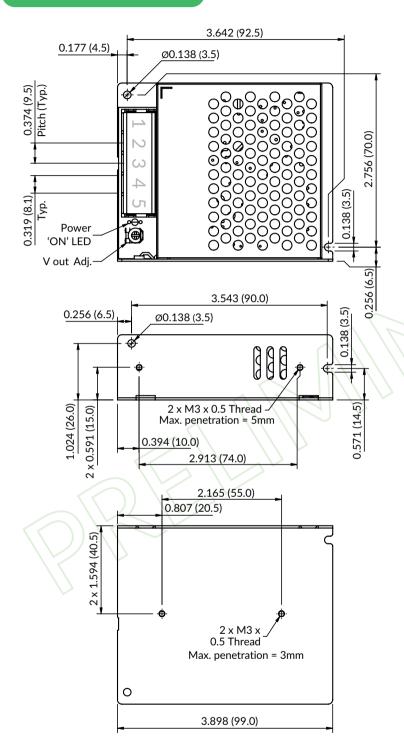



F	Pin-Out				
Pin	Function				
1	AC(L)				
2	AC(N)				
3	GND				
4	-Vo				
5	+Vo				

Connector torque: M3.5, 0.8Nm

Notes:

- 1. All dimensions are in inches (mm).
- 2. Tightening torque: M3, 0.4Nm fixings
- 3. General tolerances: ±0.039 (±1.00)
- 4. Chassis must be connected to protective earth.
- 5. Use 22-14 AWG wire range for connector