

60x60x15mm (12V)



Model	P/N		Rating Voltage (VDC)	Power Current (AMP)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)	Weight (g)
KD1206PHB1	H	○	12	0.15	1.8	4300	21	0.18	37.5	39
KD1206PHB2	H	○	12	0.09	1.1	3800	18	0.14	31.5	39
KD1206PHB3	H	○	12	0.06	0.7	3000	15	0.12	28	39
KD1206PHS1	H	●	12	0.15	1.8	4300	21	0.18	36	39
KD1206PHS2	H	●	12	0.09	1.1	3800	18	0.14	31	39
KD1206PHS3	H	●	12	0.06	0.7	3000	15	0.12	25	39

60x60x20 mm



Model	P/N	Bearing	(VDC)	(AMP)	(WATTS)	(RPM)	(CFM)	(Inch-H ₂ O)	(dBA)	(g)
KD1206PKBX	13.(2)	●	12	0.21	2.5	5100	28	0.28	40	55
KD1206PKB1	13.(2)	●	12	0.16	1.9	4500	25	0.21	35.5	55
KD1206PKB2	13.(2)	●	12	0.10	1.2	3700	21	0.15	31	55
KD1206PKB3	13.(2)	●	12	0.08	1.0	3100	17	0.10	26	55
KD1206PKSX	13	●	12	0.21	2.5	5100	28	0.28	39	55
KD1206PKS1	13	●	12	0.16	1.9	4500	25	0.21	34.5	55
KD1206PKS2	13	●	12	0.10	1.2	3700	21	0.15	29	55
KD1206PKS1	13	●	12	0.08	1.0	3100	17	0.10	24	55



Model	P/N	Bearing	(VDC)	(AMP)	(WATTS)	(RPM)	(CFM)	(Inch-H ₂ O)	(dBA)	(g)
KD2406PKB2		○	24	0.07	1.7	4200	19	0.15	32	45
KD2406PKB3		○	24	0.05	1.2	3500	16	0.13	27	45

60x60x25 mm



Model	P/N	Bearing	(VDC)	(AMP)	(WATTS)	(RPM)	(CFM)	(Inch-H ₂ O)	(dBA)	(g)
KD0506PTB2		○	5	0.32	1.6	4300	18	0.16	31.3	60
KD0506PTB3		○	5	0.23	1.2	3600	16.2	0.11	27	60
KD0506PTS2		●	5	0.33	1.7	3800	17.8	0.15	31	60
KD0506PTS3		●	5	0.23	1.2	3300	15.9	0.10	26.7	60
KD2406PTB1		○	24	0.11	2.6	5100	22.1	0.22	34.3	60
KD2406PTB2		○	24	0.08	1.9	4300	18	0.16	31.3	60
KD2406PTB3		○	24	0.06	1.4	3600	16.2	0.11	27	60
KD2406PTS1		●	24	0.11	2.6	4500	21.7	0.20	34	60
KD2406PTS2		●	24	0.08	1.9	3800	17.6	0.15	31	60
KD2406PTS3		●	24	0.06	1.4	3300	15.9	0.10	26.7	60



Model	P/N	Bearing	(VDC)	(AMP)	(WATTS)	(RPM)	(CFM)	(Inch-H ₂ O)	(dBA)	(g)
KD1206PTBX	13.(2)	●	12	0.15□	1.8□	5100□	26.5□	0.30□	36□	73
KD1206PTB1	13.(2)	●	12	0.12	1.4□	4500□	23.5□	0.24□	33□	73
KD1206PTB2	13.(2)	●	12	0.09□	1.1□	3900□	20.5□	0.18□	28□	73
KD1206PTB3	13.(2)	●	12	0.08□	1.0□	3500□	18□	0.15	26□	73
KD1206PTB4	13.(2)	●	12	0.07	0.8	3100	15.5	0.12	22	73
KD1206PTSX	13	●	12	0.16□	1.9□	5000□	26□	0.30	35□	73
KD1206PTS1	13	●	12	0.13□	1.6□	4400□	23	0.24□	32□	73
KD1206PTS2□	13	●	12	0.10□	1.2□	3800□	20	0.17□	27□	73
KD1206PTS3□	13	●	12	0.09	1.1□	3400□	17□	0.14□	25□	73
KD1206PTS4	13	●	12	0.07	0.8	3000	15	0.11	20	73□


70x70x15 mm



Model	P/N	Bearing	(VDC)	(AMP)	(WATTS)	(RPM)	(CFM)	(Inch-H ₂ O)	(dBA)	(g)
KD1207PHB1	13.(2)	●	12	0.24	2.9	3800	35	0.15	37	45
KD1207PHB2	13.(2)	●	12	0.17	2.0	3350	30	0.11	33	45
KD1207PHB3	13.(2)	●	12	0.11	1.3	2650	24	0.08	29	45
KD1207PHS1	13	●	12	0.24	2.9	3800	35	0.15	36	45
KD1207PHS2	13	●	12	0.17	2.0	3350	30	0.11	32	45
KD1207PHS3	13	●	12	0.11	1.3	2650	24	0.08	28	45

*Specifications subject to change without notice.

DC Brushless Fan Model Numbering System

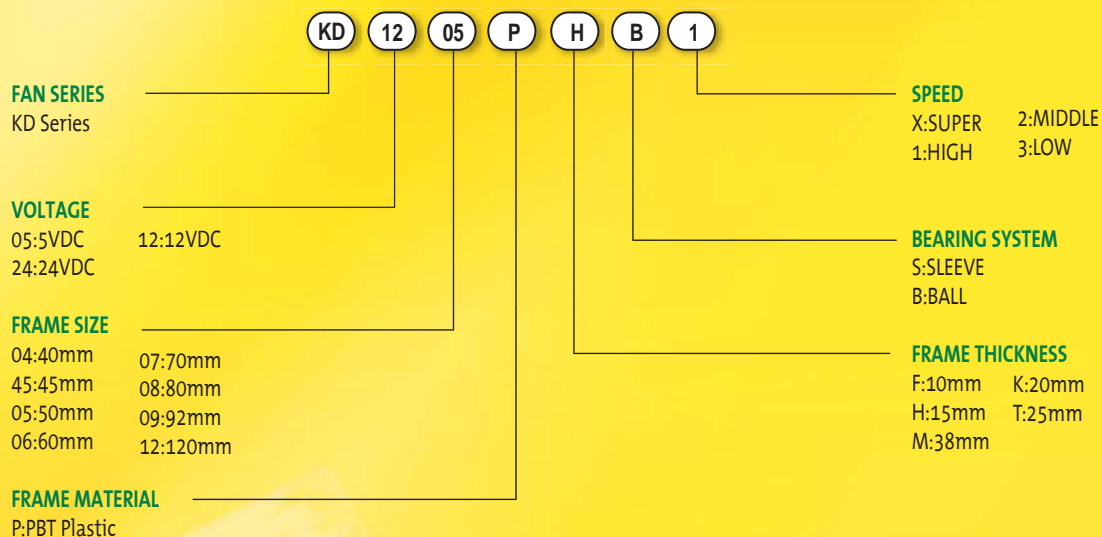

P/N

Example: KD1205PHB1 P/N:(2).GN

- 11/13 Motor model
- (2) Two ball bearing
- G Big hub
- (9) 9 Blades
- GN RoHS compliance

Worldwide Locations >>>

Headquarters:

Sunonwealth Electric Machine Industry Co., Ltd.

TEL: +886-7-8135888 FAX: +886-7-8230505/8230606/8231010
URL: <http://www.sunon.com>

Sunon Inc. (U.S.A.)

TEL: +1-714-255-0208 FAX: +1-714-255-0802
URL: <http://www.sunonusa.com>

Sunon SAS (Europe)

TEL: +33-1-46154515 FAX: +33-1-46154510
URL: <http://www.sunoneurope.com>

Sunon Corporation (Japan)

TEL: +81-3-5395-3069 FAX: +81-3-5395-3080
URL: <http://www.sunon.co.jp>

Sunon Technologies Pte Ltd. (Singapore)

TEL: +65-6795-0300 FAX: +65-6795-0600

Sunonwealth Electric Machine Industry (HK) Ltd. (Hong Kong)

TEL: +852-24-111-388 FAX: +852-24-050-707

Sunon Shanghai Office (Shanghai, China)

TEL: +86-021-54072207 FAX: +86-021-54072207 Ext.23
URL: <http://www.sunon.com.cn>

Sunon Shen Zhen Office (Shen Zhen, China)

TEL: +86-755-26880688 FAX: +86-755-26880288

Sunon Guangzhou Office (Guangzhou, China)

TEL: +86-20-87788928 FAX: +86-20-87786786