BNC Straight Plug Crimp

multicomp PRO



Specifications

Electrical Frequency Range Nominal Impedance VSWR Materials Bodies Centre Contact Insulation Crimp Ferrule Mechanical Cable Attachment Crimp Size Required


: DC-4MHz

- RoHS Compliant
- : 50Ω
- : 1.3 Max.
- : Brass Per JIS-C3604
- : Brass Per JIS-C3604
- : PTFE Per ASTM D1457 and ASTM D1710
- : Brass Per JIS-C2700
- : Outer: Crimp, Inner: Solder / Crimp : Contact: Solder
- Ferrule: 3.9 (0.154) Hex. Crimp Tool

Operating Temperature Range : -65°C to +165°C

Environmental

Diagram

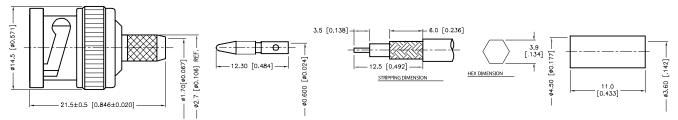

No.	Description	Material	Finish
1	Body	Brass	Nickel 100µ″ Min.
2	Washer		
3	Spring Washer	SK-5	
4	Washer	Brass	
5	Gasket	Silicone	Red
6	Insulation	PTFE	None
7	Shell	Zinc	Nickel 100µ″ Min.
8	Crimp Ferrule	Brass	
9	Centre Contact		Gold

Part Number Table

Description	Part Number
BNC Straight Plug Crimp	MC23569

Dimensions : Millimetres (Inches)

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

