# Compact and Programmable M12 RTD Temperature Transmitters



# M12TXC Series



✓ M12 Connection

✓ 4 to 20 mA Output

✓ -50 to 120°C (-58 to 248°F)

RTD  $100\Omega$  sensor with built-in transmitter and  $\frac{1}{6}$  NPT is programmable by a computer. The configuration kit required for programming is M12TX-CONFIG. This unique probe is ideal for areas with space limitations where traditional head connections are too large to fit. The M12 thread design offers a secure industrial connection.

# **Specifications**

**Body:** Stainless steel AISI 316L **Probe Length:** 13 and 24 mm

(0.51 and 0.94")

**Diameter:** 3 mm (0.12")

Probe Type: Thermowell AISI 316L SS Process Connection: 1/8 NPT male

thread or G1/8 thread

Connection: M12x1 male in accordance to VDE0627 (output connection)

Sensor: RTD PT100 class A up to 300°C in accordance to IEC751 Range: -50 to 110°C (-58 to 248°F) Tmax, Electronic: 80°C (176°F)

### **Sensor Break Monitoring:**

**Selectable:** Upscale (>21.0 mA) or downscale (<3.6 mA) action **Sensor Short-Circuit:** Fixed to

downscale (<3.6 mA) action Output: 4 to 20 mA

Factory Default: 4 to 20 mA = 0 to 100°C (32 to 212°F)

Permissible Load: 700 @ 24 Vdc [RLo= (Vsupply-8,5)/0,020]
Response Time (90%): <50 ms Isolation In - Out: Non-isolated Power Supply: 8.5 to 32 Vdc

(polarity protected)

**Environment Conditions:** 

**Temperature:** -40 to 80°C (-40 to 176°F) (for plastic body)



M12TXC-PT100-3MM-13MM-1/8NPT



M12TXC-PT100-3MM-24MM-1/8NPT

Both models shown smaller than actual size.

Relative Humidity: 0 to 100% EMC: In accordance to EN 61326 Degree of Protection: IP65 and IP67 in accordance to IEC60529

Accuracy:

Transmitter: Maximum of ±0.2°C

or  $\pm 0.2\%$  of span

Sensor: class A in accordance

to IEC751

Temperature Influence (Deviation from 20°C): Maximum of ±0.3°C/25°C or ±0.3% of span/25°C

Supply Voltage Influence: Negligible Range Configurations: It is possible set the input temperature range (span) by the M12TX-CONFIG configuration kit (PC with OS Windows® required)


Zero Adjustments: Any value between -50 to 50°C (-58 to 122°F)


Minimum Span: 50°C [if the zero value is set between one of these values: -40°C, -20°C, 0°C, 20°C, 40°C (-40°F, -4°F, 32°F, 68°F, 104°F), the minimum span is 20°C (68°F) rather than 50°C (122°F)]

Sensor Error Compensation: Over 2 points (maximum 1% of span)

Factory Setting: 0 to 100°C/ sensor break >21 mA (upscale)

Response Time: Diameter 3 mm (0.12") <3.5 seconds, diameter 6 mm (0.24") <13 seconds (test in water to IEC751- time for reaching 63.2% of instantaneous temperature change)





# M12TX-CONFIG Specifications

Interface: PC connection through the USB port with connection cable included in the kit

M12TX + Connection: Through

extension cable with M12 female connector included in the kit Note: The transmitter is powered from the USB interface

**Programming Software:** 


M12TX + Configurator for Windows® 2000 (SP3), XP (SP2), Vista (32- and 64-bit), 7 (32- and 64-bit)

**Configurable Parameters:** 

Temperature range [-50 to 800°C (-58 to 1472°F)], measurement unit (°C/°F/°K), sensor break monitoring (upscale/downscale), identifying name of the transmitter (16 alphanumeric characters), input sensor error compensation over one or two points

Supported Languages: Italian, English, French, German, Swedish Included in the Kit: Interface USB, connection cable between USB port and interface, connection cable between interface and M12TX + transmitter, memory-stick USB with installation software, introductive manual for software installation and USB



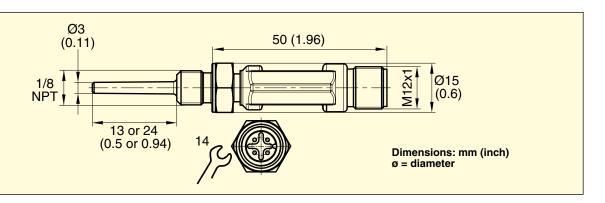

### **Standard**

| To Order                     |   |
|------------------------------|---|
| Model No.                    | Description   |
| M12TXC-PT100-3MM-13MM-1/8NPT | Temperature transmitter, output 4 to 20 mA, 3 mm (0.11") diameter, 13 mm (0.5") long, $\frac{1}{8}$ NPT |
| M12TXC-PT100-3MM-24MM-1/8NPT | Temperature transmitter, output 4 to 20 mA, 3 mm (0.11") diameter, 24 mm (0.94") long, 1/8 NPT          |

### **Metric**

| Model No.                  | Description   |
|----------------------------|---|
| M12TXC-PT100-3MM-13MM-G1/8 | Temperature transmitter, output 4 to 20 mA, 3 mm (0.11") diameter, 13 mm (0.5") long, $G\frac{1}{8}$ thread |
| M12TXC-PT100-3MM-24MM-G1/8 | Temperature transmitter, output 4 to 20 mA, 3 mm (0.11") diameter, 24 mm (0.94") long, G1/6 thread          |

Ordering Examples: M12TXC-PT100-3MM-1/8NPT, temperature transmitter, output 4 to 20 mA, 3 mm diameter, 13 mm long. M12TXC-PT100-3MM-24MM-1/8NPT, temperature transmitter, output 4 to 20 mA, 3 mm diameter, 24 mm long.



## **Accessories**

| Model No.         | Description  |
|-------------------|--|
| M12C-PUR-4-S-F-10 | Polyurethane cable, straight 4-pin M12 female connector one end, flying leads one end, 10 m (32.8') long |
| M12TX-CONFIG      | Configuration kit for M12TXC, USB serial interface, connection cables, programming software for Windows® |