

2903001

https://www.phoenixcontact.com/us/products/2903001

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Primary-switched UNO POWER power supply for DIN rail mounting, input: 1-phase, output: 15 V DC/55 W

Product Description

UNO POWER power supplies with basic functionality

Thanks to their high power density, compact UNO POWER power supplies are the ideal solution for loads up to 240 W, particularly in compact control boxes. The power supply units are available in various performance classes and overall widths. Their high degree of efficiency and low idling losses ensure a high level of energy efficiency.

Your advantages

- Flexible mounting by simply snapping onto the DIN rail
- More space in the control cabinet with up to 20 % higher power density
- · Maximum energy efficiency, thanks to over 90 % efficiency and extremely low idling losses under 0.3 W
- Outdoor installation, thanks to the wide temperature range from -25°C to +70°C



2903001

https://www.phoenixcontact.com/us/products/2903001

Commercial Data

Item number	2903001
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	C14
Product Key	CMPU19
Catalog Page	Page 272 (C-4-2019)
GTIN	4046356808729
Weight per Piece (including packing)	254.8 g
Weight per Piece (excluding packing)	246.5 g
Customs tariff number	85044030
Country of origin	PL



2903001

https://www.phoenixcontact.com/us/products/2903001

Technical Data

Input data

AC operation

Nominal input voltage range 100 ∨ AC 264 ∨ AC Input voltage range 85 ∨ AC 264 ∨ AC Input voltage range AC 85 ∨ AC 264 ∨ AC Voltage type of supply voltage AC Inrush current < 25 A (typ.) Inrush current integral (I²t) < 0.5 A²s (typ.) Frequency range (f _N) 50 Hz 60 Hz ±10 % Mains buffering time > 25 ms (120 ∨ AC) ≥ 90 ms (230 ∨ AC) typ. 1.3 A (100 ∨ AC) Current consumption typ. 0.6 A (240 ∨ AC) Nominal power consumption 127.6 ∨A Protective circuit Transient surge protection; Varistor Power factor (cos phi) 0.49 Typical response time < 1 s Input fuse 3.15 A (slow-blow, internal) Permissible backup fuse B6 B10 B16 Recommended breaker for input protection 6 A 16 A (Characteristics B, C, D, K)	AC operation	
Input voltage range AC Voltage type of supply voltage AC Inrush current $< 25 \text{ A (typ.)}$ Inrush current integral (I^2 t) Frequency range (f_N) Mains buffering time $< 25 \text{ ms} (120 \text{ V AC})$ $> 25 \text{ ms} (120 \text{ V AC})$ $> 90 \text{ ms} (230 \text{ V AC})$ Current consumption $< 127.6 \text{ VA}$ Protective circuit Transient surge protection; Varistor Power factor (cos phi) Typical response time < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18 < 18	Nominal input voltage range	100 V AC 240 V AC
Voltage type of supply voltage AC Inrush current $< 25 \text{ A (typ.)}$ Inrush current integral (I^2 t) $< 0.5 \text{ A}^2 \text{ s (typ.)}$ Frequency range (f_N) $50 \text{ Hz } 60 \text{ Hz } \pm 10 \%$ Mains buffering time $> 25 \text{ ms } (120 \text{ V AC})$ $> 90 \text{ ms } (230 \text{ V AC})$ Current consumption $typ. 1.3 \text{ A } (100 \text{ V AC})$ $typ. 0.6 \text{ A } (240 \text{ V AC})$ Nominal power consumption 127.6 VA Protective circuit $Transient \text{ surge protection; Varistor}$ Power factor (cos phi) 0.49 Typical response time $< 1 \text{ s}$ Input fuse $3.15 \text{ A (slow-blow, internal)}$ Permissible backup fuse 86 B10 B16	Input voltage range	85 V AC 264 V AC
$\begin{array}{llllllllllllllllllllllllllllllllllll$	Input voltage range AC	85 V AC 264 V AC
$ \begin{array}{llllllllllllllllllllllllllllllllllll$	Voltage type of supply voltage	AC
$ \begin{array}{lll} & 50 \text{Hz} \dots 60 \text{Hz} \pm 10 \% \\ & \\ \text{Mains buffering time} & \\ & \\ & \\ & \\ & \\ & \\ & \\ & \\ & \\ & $	Inrush current	< 25 A (typ.)
Mains buffering time > 25 ms (120 V AC) > 90 ms (230 V AC) typ. 1.3 A (100 V AC) typ. 0.6 A (240 V AC) Nominal power consumption 127.6 VA Protective circuit Transient surge protection; Varistor Power factor (cos phi) Typical response time < 1 s Input fuse 3.15 A (slow-blow, internal) Permissible backup fuse 86 B10 B16	Inrush current integral (I ² t)	< 0.5 A ² s (typ.)
> 90 ms (230 V AC) Current consumption typ. 1.3 A (100 V AC) typ. 0.6 A (240 V AC) Nominal power consumption 127.6 VA Protective circuit Transient surge protection; Varistor Power factor (cos phi) 0.49 Typical response time < 1 s Input fuse 3.15 A (slow-blow, internal) Permissible backup fuse B6 B10 B16	Frequency range (f _N)	50 Hz 60 Hz ±10 %
Current consumption typ. 1.3 A (100 V AC) typ. 0.6 A (240 V AC) Nominal power consumption 127.6 VA Protective circuit Transient surge protection; Varistor Power factor (cos phi) 0.49 Typical response time < 1 s Input fuse 3.15 A (slow-blow, internal) Permissible backup fuse B6 B10 B16	Mains buffering time	> 25 ms (120 V AC)
typ. 0.6 A (240 V AC) Nominal power consumption 127.6 VA Protective circuit Transient surge protection; Varistor 0.49 Typical response time < 1 s Input fuse 3.15 A (slow-blow, internal) Permissible backup fuse B6 B10 B16		> 90 ms (230 V AC)
Nominal power consumption 127.6 VA Protective circuit Power factor (cos phi) Typical response time Input fuse 127.6 VA 7 Transient surge protection; Varistor 0.49 < 1 s 1 s 1 s 1 s 1 s 1 s 1 s 1	Current consumption	typ. 1.3 A (100 V AC)
Protective circuit Power factor (cos phi) Typical response time Input fuse Permissible backup fuse Transient surge protection; Varistor 0.49 < 1 s 3.15 A (slow-blow, internal) B6 B10 B16		typ. 0.6 A (240 V AC)
Power factor (cos phi) Typical response time < 1 s Input fuse 3.15 A (slow-blow, internal) Permissible backup fuse B6 B10 B16	Nominal power consumption	127.6 VA
Typical response time <1 s Input fuse 3.15 A (slow-blow, internal) Permissible backup fuse B6 B10 B16	Protective circuit	Transient surge protection; Varistor
Input fuse 3.15 A (slow-blow, internal) Permissible backup fuse B6 B10 B16	Power factor (cos phi)	0.49
Permissible backup fuse B6 B10 B16	Typical response time	<1s
	Input fuse	3.15 A (slow-blow, internal)
Recommended breaker for input protection 6 A 16 A (Characteristics B, C, D, K)	Permissible backup fuse	B6 B10 B16
	Recommended breaker for input protection	6 A 16 A (Characteristics B, C, D, K)

Output data

Efficiency	typ. 87 % (120 V AC)	
	typ. 88 % (230 V AC)	
Output characteristic	HICCUP	
Nominal output voltage	15 V DC ±1 %	
Nominal output current (I _N)	3.7 A (-25 °C 55 °C)	
Derating	55 °C 70 °C (2.5%/K)	
Feedback voltage resistance	< 25 V DC	
Protection against overvoltage at the output (OVP)	≤ 25 V DC	
Control deviation	< 1 % (change in load, static 10 % 90 %)	
	< 3 % (Dynamic load change 10 % 90 %, 10 Hz)	
	< 0.1 % (change in input voltage ±10 %)	
Residual ripple	< 50 mV _{PP} (with nominal values)	
Short-circuit-proof	yes	
Output power	55 W	
Maximum no-load power dissipation	< 0.3 W	
Power loss nominal load max.	< 7 W	
Rise time	< 0.5 s (U _{OUT} (10 % 90 %))	
Response time	< 2 ms	
Connection in parallel	yes, for redundancy and increased capacity	



2903001

https://www.phoenixcontact.com/us/products/2903001

Connection in action	
Connection in series	yes
nnection data	
nput	
Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm²
Conductor cross section flexible max.	2.5 mm²
Single conductor/flexible terminal point with ferrule with plastic sleeve, min.	0.2 mm ²
Single conductor/flexible terminal point with ferrule with plastic sleeve, max.	2.5 mm ²
Single conductor/flexible terminal point with ferrule without plastic sleeve, min.	0.2 mm ²
Single conductor/flexible terminal point with ferrule without plastic sleeve, max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Output	
Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Single conductor/flexible terminal point with ferrule with plastic sleeve, min.	0.2 mm ²
Single conductor/flexible terminal point with ferrule with plastic sleeve, max.	2.5 mm ²
Single conductor/flexible terminal point with ferrule without plastic sleeve, min.	0.2 mm ²
Single conductor/flexible terminal point with ferrule without plastic sleeve, max.	2.5 mm²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm

0.6 Nm

LED signaling

Tightening torque max



2903001

https://www.phoenixcontact.com/us/products/2903001

Max. permissible relative humidity (operation)

Shock

1.00 4 kV AC (type test) 3 kV AC (routine test) Power supply > 647000 h (40 °C)
4 kV AC (type test) 3 kV AC (routine test) Power supply
4 kV AC (type test) 3 kV AC (routine test) Power supply
3 kV AC (routine test) Power supply
Power supply
> 647000 h (40 °C)
II (in closed control cabinet)
2
35 mm
90 mm
90 mm 84 mm
OT IIIII
0 mm / 0 mm
30 mm / 30 mm
DIN rail mounting
alignable: 0 mm horizontally, 30 mm vertically
horizontal DIN rail NS 35, EN 60715
No
V0
Plastic
POM (Polyoxymethylene)
Polycarbonate

≤ 95 % (at 25 °C, non-condensing)

27)

18 ms, 30g, in each space direction (according to IEC 60068-2-



2903001

https://www.phoenixcontact.com/us/products/2903001

Vibration (operation)	< 15 Hz, amplitude ±2.5 mm (according to IEC 60068-2-6)	
	15 Hz 150 Hz, 2.3g, 90 min.	
andards and regulations		
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)	
Standard – Limitation of mains harmonic currents	EN 61000-3-2	
Standard - Electrical safety	IEC 62368-1 (SELV)	
Standard – Safety extra-low voltage	IEC 62368-1 (SELV) und EN 60204-1 (PELV)	
Standard - Safe isolation	DIN VDE 0100-410	
Standard - Safety of transformers	EN 61558-2-16	
Approval - requirement of the semiconductor industry with regard to mains voltage dips	EN 61000-4-11	
pproval data		
CSA	CAN/CSA-C22.2 No. 60950-1-07	
	CSA-C22.2 No. 107.1-01	
	CAN/CSA-C22.2 No. 213 Class I, Division 2, Groups A, B, C, D T4A (Hazardous Location)	
UL approvals	UL/C-UL listed UL 508	
	UL/C-UL Listed ANSI/ISA-12.12.01 Class I, Division 2, Groups A	
	B, C, D T4A (Hazardous Location)	
	B, C, D T4A (Hazardous Location) UL/C-UL Recognized UL 60950-1	
Conformity/Approvals		
Conformity/Approvals SIL in accordance with IEC 61508		
SIL in accordance with IEC 61508	UL/C-UL Recognized UL 60950-1	
SIL in accordance with IEC 61508 AC data	UL/C-UL Recognized UL 60950-1	
SIL in accordance with IEC 61508 MC data Low Voltage Directive	UL/C-UL Recognized UL 60950-1 0 Conformance with Low Voltage Directive 2014/35/EC	
SIL in accordance with IEC 61508 AC data Low Voltage Directive Electromagnetic compatibility	UL/C-UL Recognized UL 60950-1 0 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU	
SIL in accordance with IEC 61508 MC data Low Voltage Directive	UL/C-UL Recognized UL 60950-1 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3	
SIL in accordance with IEC 61508 AC data Low Voltage Directive Electromagnetic compatibility EMC requirements for noise emission	UL/C-UL Recognized UL 60950-1 0 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3 EN 61000-6-4	
SIL in accordance with IEC 61508 AC data Low Voltage Directive Electromagnetic compatibility	UL/C-UL Recognized UL 60950-1 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3 EN 61000-6-4 EN 61000-6-1	
SIL in accordance with IEC 61508 AC data Low Voltage Directive Electromagnetic compatibility EMC requirements for noise emission EMC requirements for noise immunity	UL/C-UL Recognized UL 60950-1 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3 EN 61000-6-4 EN 61000-6-1 EN 61000-6-2	
SIL in accordance with IEC 61508 AC data Low Voltage Directive Electromagnetic compatibility EMC requirements for noise emission	UL/C-UL Recognized UL 60950-1 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3 EN 61000-6-4 EN 61000-6-1	
SIL in accordance with IEC 61508 AC data Low Voltage Directive Electromagnetic compatibility EMC requirements for noise emission EMC requirements for noise immunity	UL/C-UL Recognized UL 60950-1 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3 EN 61000-6-4 EN 61000-6-1 EN 61000-6-2	
SIL in accordance with IEC 61508 AC data Low Voltage Directive Electromagnetic compatibility EMC requirements for noise emission EMC requirements for noise immunity Noise immunity	UL/C-UL Recognized UL 60950-1 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3 EN 61000-6-4 EN 61000-6-1 EN 61000-6-2	
SIL in accordance with IEC 61508 MC data Low Voltage Directive Electromagnetic compatibility EMC requirements for noise emission EMC requirements for noise immunity Noise immunity Electrostatic discharge	UL/C-UL Recognized UL 60950-1 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3 EN 61000-6-4 EN 61000-6-1 EN 61000-6-2 EN 61000-6-2	
SIL in accordance with IEC 61508 MC data Low Voltage Directive Electromagnetic compatibility EMC requirements for noise emission EMC requirements for noise immunity Noise immunity Electrostatic discharge Standards/regulations	UL/C-UL Recognized UL 60950-1 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3 EN 61000-6-4 EN 61000-6-1 EN 61000-6-2 EN 61000-6-2	
SIL in accordance with IEC 61508 AC data Low Voltage Directive Electromagnetic compatibility EMC requirements for noise emission EMC requirements for noise immunity Noise immunity Electrostatic discharge Standards/regulations Electrostatic discharge	UL/C-UL Recognized UL 60950-1 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3 EN 61000-6-4 EN 61000-6-1 EN 61000-6-2 EN 61000-6-2	
SIL in accordance with IEC 61508 MC data Low Voltage Directive Electromagnetic compatibility EMC requirements for noise emission EMC requirements for noise immunity Noise immunity Electrostatic discharge Standards/regulations Electrostatic discharge Contact discharge	UL/C-UL Recognized UL 60950-1 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3 EN 61000-6-4 EN 61000-6-1 EN 61000-6-2 EN 61000-6-2 EN 61000-4-2	
SIL in accordance with IEC 61508 AC data Low Voltage Directive Electromagnetic compatibility EMC requirements for noise emission EMC requirements for noise immunity Noise immunity Electrostatic discharge Standards/regulations Electrostatic discharge Contact discharge Discharge in air	UL/C-UL Recognized UL 60950-1 Conformance with Low Voltage Directive 2014/35/EC Conformance with EMC Directive 2014/30/EU EN 61000-6-3 EN 61000-6-4 EN 61000-6-1 EN 61000-6-2 EN 61000-6-2 EN 61000-4-2 6 kV (Test Level 3) 8 kV (Test Level 3)	



2903001

https://www.phoenixcontact.com/us/products/2903001

Frequency range	80 MHz 1 GHz	
Test field strength	10 V/m (Test Level 3)	
Frequency range	1 GHz 6 GHz	
Test field strength	10 V/m (Test Level 3)	
Comments	Criterion A	
Fast transients (burst)		
Standards/regulations	EN 61000-4-4	
Fast transients (burst)		
Input	4 kV (Test Level 4 - asymmetrical)	
Output	2 kV (Test Level 3 - asymmetrical)	
Comments	Criterion A	
Surge voltage load (surge)		
Standards/regulations	EN 61000-4-5	
Input	2 kV (Test Level 3 - symmetrical)	
	4 kV (Test Level 4 - asymmetrical)	
Output	1 kV (Test Level 2 - symmetrical)	
- Sapat	2 kV (Test Level 3 - asymmetrical)	
Comments	Criterion A	
Conducted interference		
Standards/regulations	EN 61000-4-6	
Conducted interference		
Input/Output	asymmetrical	
Frequency range	0.15 MHz 80 MHz	
Comments	Criterion A	
Voltage	10 V (Test Level 3)	
Voltage dips		
Standards/regulations	EN 61000-4-11	
Emitted interference		
Standards/regulations	EN 61000-6-3	
Radio interference voltage in acc. with EN 55011	EN 55011 (EN 55022) Class B, area of application: Industry and residential	
Emitted radio interference in acc. with EN 55011	EN 55011 (EN 55022) Class B, area of application: Industry and residential	
Criterion A	Normal operating behavior within the specified limits.	
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.	




2903001

https://www.phoenixcontact.com/us/products/2903001

Drawings

Block diagram

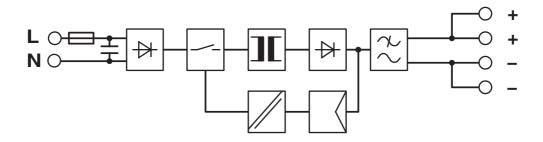




2903001

https://www.phoenixcontact.com/us/products/2903001

Αp	pr	ΌV	a	ls
----	----	----	---	----

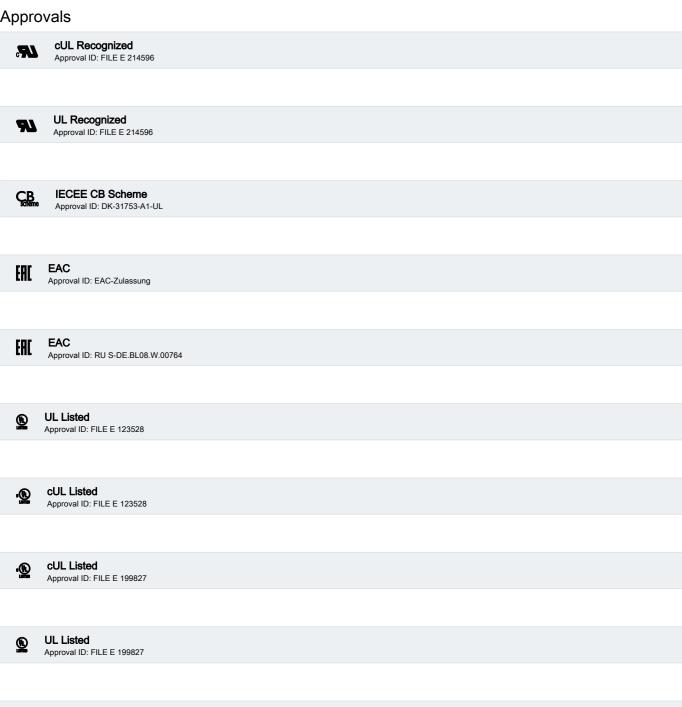

cULus Listed

cULus Recognized

cULus Listed



2903001

https://www.phoenixcontact.com/us/products/2903001



2903001

https://www.phoenixcontact.com/us/products/2903001

Classifications

UNSPSC 21.0

ECLASS

27040701
27040701
27040701
EC002540

39121000



2903001

https://www.phoenixcontact.com/us/products/2903001

Environmental Product Compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 25;
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"



2903001

https://www.phoenixcontact.com/us/products/2903001

Accessories

Redundancy module

Redundancy module - UNO-DIODE/5-24DC/2X10/1X20 - 2905489 https://www.phoenixcontact.com/us/products/2905489

Redundancy module, 5 V - 24 V DC, 2 x 10 A, 1 x 20 A.



Type 3 surge protection device

Type 3 surge protection device - PLT-SEC-T3-230-FM-UT - 2907919 https://www.phoenixcontact.com/us/products/2907919



Type 2/3 surge protection, consisting of protective plug and base element with screw connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage: 230 V AC/DC



2903001

https://www.phoenixcontact.com/us/products/2903001

Type 3 surge protection device

Type 3 surge protection device - PLT-SEC-T3-24-FM-UT - 2907916 https://www.phoenixcontact.com/us/products/2907916



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 24 V AC/DC

Phoenix Contact 2022 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com