High Power Super Flux LED multicomp PRO





Features:

- High Luminance
- **High Operating Temperature**
- Industry Standard 7.62mm Square Package

Specifications:

Maximum Ratings at Ta=25°C

Reverse Voltage (<100µA) : 5V D.C. Forward Current : 30mA Pulse Current (Pulse Width of 0.1ms, 1/10 Duty Cycle) : 100mA

: -40°C to +100°C **Operating Temperature Range** Storage Temperature Range : -40°C to +100°C Soldering Temperature Dip Soldering : 260°C for 5 secs Soldering Temperature Hand Soldering : 350°C for 3 secs

Electrical & Optical Characteristics at Ta=25°C

LED Chip					Luminous		Forward		Viewing	
Material	Emitted Colour	Brightness	Lens Colour	Dominant Wavelength (nm) at 20mA	Intensity (mcd) at 20mA		Voltage (V) at 20mA		Viewing Angle 2 O 1/2	Part Number
					Min.	Тур.	Тур.	Max.	(deg)	Number
InGaN / Sapphire	Blue			465	200	500	3.2	4	65	OVA-1023
InGaN / Sapphire	True Green	Mega	Water Clear	520	1,950	3,800	3.2		50	OVA-1024
A1GaInP/Si	Red			625	1,400	2,800	2.1	2.6		OVA-1028
A1GaInP/Si	Yellow			589	1,400	3,000	2.1	2.1 2.5		OVA-1026

LED Chip												
Material		Emitted Colour	Brightness	Lens Colour	Co-Ordinates for CIE Chromaticity at 20mA		Luminous Intensity (mcd) at 20mA		Forward Voltage (V) at 20mA		Viewing Angle 2 Θ ¹ / ₂ (deg)	Part Number
					X Axis	Y Axis	Min.	Тур.	Тур.	Max.	(339)	
InGal Sapph		White	Mega	Water Clear	0.31	0.3	1.400	3,300	3.2	4	65	OVA-1021


Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro




High Power Super Flux LED multicomp PRO




Radiation Diagrams

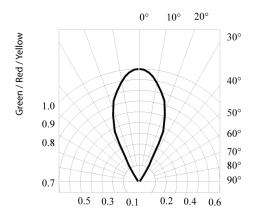



OVA-10 Series

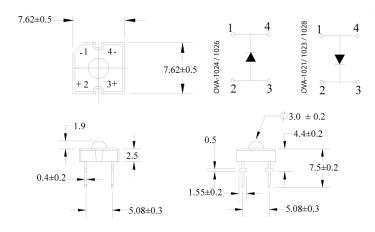

Part Number Table

Description:	Part Number			
LED, Suprflux SML Dome, White	OVA-1021			
LED, Suprflux SML Dome, Blue	OVA-1023			
LED, Suprflux SML Dome, Green	OVA-1024			
LED, Suprflux SML Dome, Yellow	OVA-1026			
LED, Suprflux SML Dome, Red	OVA-1028			

Dimensions: Millimetres

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

