Enabling the Electronics Revolution



PSE-360

Compact Panel Mount Hall-Effect Rotary Sensor



KEY FEATURES



True, contactless operation

Without any gears or mechanical interfaces the sensor is easily assembled and calibrated and subject to limited wear and tear over lifetime.



360 degree absolute position feedback

Endless mechanical rotational angle without dead band, keeps the position on power loss with programmable electrical angles from 15 to 360 degrees.



Integrated shaft

The magnet is securely fastened to the shaft and acts as only moving component in the sensor.



Made for harsh environments

The rugged package protects the sensor from dust, moisture, vibration and extreme temperatures for usage in the most demanding environments.



Adaptable to your requirements

Custom mechanical design, programmable transfer function as well as different output protocols and redundancy levels available.

DESCRIPTION

Piher Sensing Systems' PSE Series Rotary Position Sensors are based on contactless hall-effect technology and deliver high accuracy and linearity in a compact package. Increased rotational life and robustness against humidity, vibration and shock make them perfectly suited for harsh industrial and transportation environments. These absolute sensors will not lose its values even after a power failure.

The PSE-360 is a end-of-shaft sensor with 360 degree endless rotation and programmable electrical angles from 15 to 360 degrees (without deadband). Custom versions with different shafts and customer specific output curves can be delivered on request.

APPLICATIONS

Industrial

- Autonomous warehouse robotics
- ▶ Robotics and automation feedback
- ► Valve monitoring
- Conveyor operation
- ► Test and measurement equipment
- Machine tool control

Transportation

- ► Steering wheel angle
- ▶ Pedal Position
- ► Suspension/height detection
- ▶ Fork height and mast tilt
- Bucket position
- ► Hitch position
- ► Transmission gear shift
- ► Cab controls
- Marine
- Steering and shifter sensor
- Home and Building Automation
- ► HVAC systems

Medical

► Equipment control


PSE-360

Compact Panel Mount Hall-Effect Rotary Sensor

MECHANICAL SPECIFICATIONS	
Mechanical Angular Range ¹	360° (endless rotation)
Connection	Fly leads, connector assembly on request
Shaft diameter ¹	6,25mm
Mounting Method	Panel mount
1 Other specifications on request	·
ELECTRICAL SPECIFICATIONS	
Linearity ¹	±1% absolute (±0.5% upon request)
Electrical Angular Range ²	360°, 270°, 180°, 120°, 90°, 50°
Output Protocol	Analog (Ratiometric), PWM
Resolution	12 bits
Output Range ² standard inverted	10% to 90% Vdc 90% to 10% Vdc
Supply Voltage ²	5V ±10%
Supply Current	Typ 8.5 mA
Voltage Protection	±18V
Self-diagnostic features	yes

¹ Ferromagnetic materials close to the sensor (i.e. shaft, mounting surface) may affect the sensor's linearity. ² Other specification on request

DIMENSIONS (IN MM)

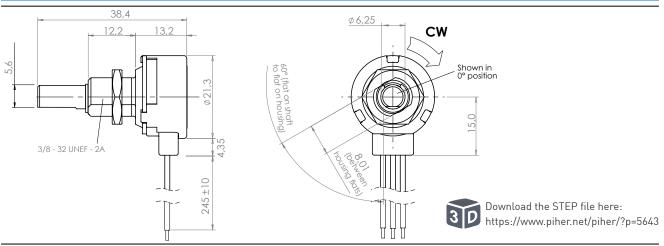


Sensor shipped with one nut installed at base and one lose nut. Other shafts available on request.

MECHANICAL CUSTOMIZATION OPTIONS

- Different shaft sizes .
- Additional O-rings .
- Connector assembly .
- Heat shrink wire protectors .






PIHER sensing systems

Page 2 of 3 **Amphenol Sensors**

PSE-360

Compact Panel Mount Hall-Effect Rotary Sensor

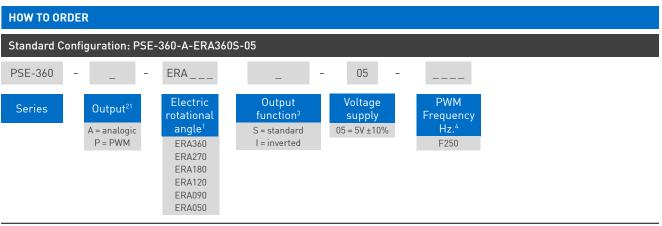


1 The analog output is ratiometric, proportional to input voltage

Other electrical angular ranges available on request.
Other output functions available on request. Enter X as long as the new output function is not defined.

4 Leave empty if not applicable. Others available on request.

TYPICAL OUTPUT CURVE

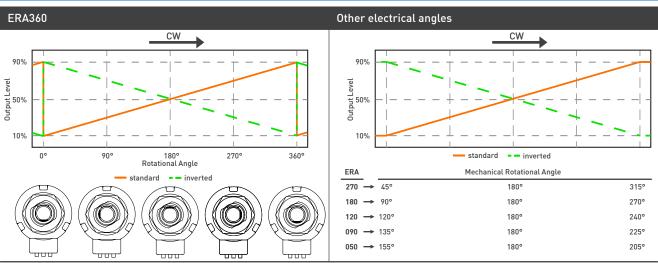

Custom output functions available on request.







Please always use the latest updated datasheets and 3D models published on our website.

Disclaimer

Disclamer: The product information in this statleg is for reference purposes. Please consult for the most up to date and accurate design information. Pher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Pher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contaned herein or in any other disclosure relating to any product described herein. Pher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Pher's terms and conditions of state, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piler: The products not expressly indicated for use in medica, life-asving, or tife-sustaining applications unless otherwise expressly indicated. Customers using or selling Pher products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Pher for any damages arising or resulting from such use or sale. Please contact authorized Pher personnel to obtain writhen terms and conditions or stagare to fully indemnify Pher for such applications. Product names and markings noted herein may be trademarks of their respective owners. Information contained in and/or attached to this catalog may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information, please contact the sender immediately. For any PhiPher Export, Note: All products / technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration R

PIHER sensing systems



CONTACT

Piher Sensing Systems Polígono Industrial Municipal Vial T2, Nº22 31500 Tudela Spain

sales@piher.net

Europe:	+34 948 820 450
Americas:	+1 636 251 0855
Asia Pacific:	+65 9641 8886
India:	+91 9538 686 586

Page 3 of 3 **Amphenol Sensors**