# TW3012



## TW3012 permanent-Mount GPS-L1 Antenna

Frequency Coverage: GPS-L1

The TW3012 is a professional-grade, permanent-mount GPS-L1 antenna, specially designed for precision tracking and timing applications.

The TW3012 features a custom high performance, wide band patch element, a 28 dB gain LNA stage and a high-rejection out-of-band SAW filter. The TW3012 includes a tight SAW pre-filter to provide strong protection against out-of-band signals. It provides ±10 MHz bandwidth centred on 1575.42 MHz and covers the GPS-L1, and SBAS (WAAS/EGNOS/MSAS) signals. It provides great axial ratio, excellent circular polarized signal reception, strong multipath rejection and very deep out-of-band signal rejection.

The TW3012 is housed in a permanent-mount industrial-grade weatherproof enclosure. Optional components include a 10 cm ground plane (P/N 23-0067-0), an L-bracket mount (P/N 23-0040-0), or a pipe mount (P/N 23-0065-0).



### **Applications**

- Mission-critical GPS tracking and timing
- Precision agriculture, mining, and construction
- · Law enforcement and public safety
- Fleet management and asset tracking
- Avionics

### **Features**

- Great axial ratio
- Low noise LNA (4.3 dB typ.)
- Pre-filter
- High-rejection SAW filter
- High-gain (28 dB typ.)
- Low current (9 mA typ.)
- ESD circuit protection (15 kV)
- Wide supply voltage range (2.5 to 12 VDC)
- IP69K weatherproof housing

### **Benefits**

- Excellent multipath rejection
- Increase system accuracy
- Excellent signal-to-noise ratio
- Very deep out-of-band signal rejection
- Ideal for harsh environments
- RoHS and REACH compliant

**About Tallysman:** With global headquarters and manufacturing in Ottawa, Canada, Tallysman is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Tallysman's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at **www.tallysman.com** 

# TW3012 permanent-Mount GPS-L1 Antenna

Frequency Coverage: GPS-L1

# Antenna Technology Single-feed RHCP ceramic patch

		Gain	Axial Ratio	
		dBic typ. at Zenith	dB at Zenith	
GNSS				
GPS / QZSS	L1	4.0	≤ 4	
	L2	-	-	
	L5	-	-	
GLONASS	G1	-	-	
	G2	-	-	
	G3	-	-	
Galileo	E1	-	-	
	E5a	-	-	
	E5b	-	-	
	E6	-	-	
BeiDou	B1	-	-	
	B2	-	-	
	B2a	-	-	
	В3	-	-	
IRNSS / NavIC	L5	-	-	
QZSS	L6	-	-	
L-band correction services		-	-	
Satellite Communications				
Iridium		-	-	
Globalstar		-	-	
Other				
Axial Ratio at 10°		Efficiency	-	
Phase Centre Variation	-			

### Mechanicals

Mechanical Size 66.5 mm (dia.) x 21 mm (h.)

Weight 150 g Available Connectors -

Radome / Enclosure Radome: EXL 9330, Base: Zamak White Metal

Mount -

### Environmental

 $\begin{array}{ll} \mbox{Operating Temperature} & -40 \ ^{\circ}\mbox{C to} + 85 \ ^{\circ}\mbox{C} \\ \mbox{Storage Temperature} & -50 \ ^{\circ}\mbox{C to} + 95 \ ^{\circ}\mbox{C} \\ \end{array}$ 

Mechanical VibrationMIL-STD-810D Method 514.4 and 514.5Shock and DropVertical axis: 50 G, other axes: 30 GSalt FogMIL-STD-810F Section 509.4

Low Pressure - Altitude -

IP Rating (housing) IP69K

Compliance IPC-A-610, FCC, RED / CE Mark, RoHS, REACH

Warranty:

Parts and Labour 3-year standard warranty

### Low Noise Amplifier (LNA) - Measured at 3.0 VDC and 25°C

Frequency Bandwith		Out-of-Band Rejection	
Lower Band	-	-	
Upper Band	1575.42 Mhz ± 10 Mhz	≥ 60 dB @ < 1560 MHz ≥ 56 dB @ > 1600 MHz ≥ 80 dB @ > 1620 MHz	

**Architecture** Pre-filter  $\rightarrow$  LNA stage 1  $\rightarrow$  filter  $\rightarrow$  LNA stage 2

**Gain** 28 dB typ. | 24 dB min.

Noise Figure 4.3 dB typ.


**VSWR** < 1.5:1 typ. | 1.8:1 max.

Supply Voltage Range2.5 to 12 VDC nom. (16 VDC max.)Supply Current9 mA typ. across all input voltages

ESD Circuit Protection 15 kV air discharge
P 1dB Output 4.0 dBm @ 1575.42 MHz

**Group Delay Variation** 35 ns typ. @ (1570.42 - 1580.42 MHz)

### **Mechanical Diagram**

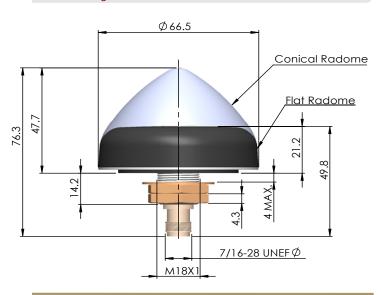

## Ordering Information

Part Number 33-3012-xx-yy-zzzz

where xx = connector type, yy = shape and colour of radome, and zzzz = cable length in mm

Please refer to our **Ordering Guide** to review available radomes and connectors at: https://www.tallysman.com/resource/tallysman-ordering-guide/

© 2019 Tallysman Inc. All rights reserved. Tallysman, the "When Precision Matters" tag line and the Tallysman logo are trademarks or registered trademarks of Tallysman Inc. and/or its affiliates in Canada and certain other countries. All other trademarks mentioned in this document are the property of their respective owners. The information presented is subject to change without notice. Tallysman assumes no responsibility for any errors or omissions in this document. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind.