Microswitch SPDT, Long Roller





Specifications:

Rating : 10A, 125/250V AC

: 10(2)A, 125/250V AC (NEMKO/ENEC/CQC)

: 25T130 µ50E3

Maximum Contact Resistance : 500MΩ

 $\begin{array}{ll} \text{Insulation Resistance} & :> 100 \text{M}\Omega \; 500 \text{V DC} \\ \text{Withstand Voltage} & : 1,000 \text{V AC for 1 minute} \end{array}$

Operating Frequency : Mechanical 60 operations/minute

: Electrical 6 to 12 operation/minute

Ambient Temperature : -25°C to +85°C

Ambient Humidity : ≤ 85%RH

Mechanical Life : 1,000,000 cycles

Electrical Life (at rate load) : 50,000 cycles

Contact Configuration : SPDT

Microswitch Type : Snap Action
Switch Operation : Off-On
Operating Force Max : 120gf

Switch Terminals : Quick Connect, Solder

Actuator Type : Long Roller
CExternal Depth : 9.7mm
External Width : 27.8mm
Height : 15.8mm
Operating Force : 1.18N
Pre-travel : 3.2mm
Series : M141T01


Switch Case : PBT (Polybutylene Terephthalate)


Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro




Microswitch SPDT, Long Roller

multicomp PRO

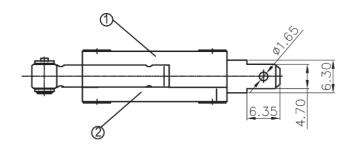



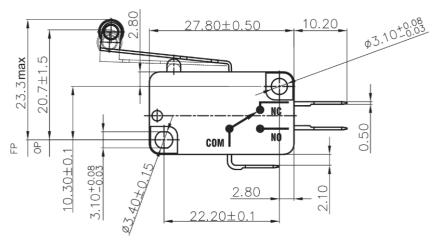




Note: Tolerances unless otherwise specified: ±0.016/0.4 inches/mm

Dimensions: Millimetres

ITEM	DESCRIPTION	MATERIAL
01	BASE	PBT
02	COVER	PBT
03	BUTION	PBT
04	TERMINAL	SILVER PLATE COPPER ALLOY
05	TERMINAL	SILVER PLATE COPPER ALLOY
06	ANCHOR	SILVER PLATE COPPER ALLOY
07	SPRING	COPPER ALLOY
08	PLATE MOVING	SILVER PLATE COPPER ALLOY
09	CONTACT	Ag ALLOY/Cu
10	CONTACT	Ag ALLOY/Cu



Operating Force	100±30cf		
Release Force	15gf min		
Pretravel	2.7mm max		
Overtravel	6.1mm min		
Movement Differential	3.6mm max		
Operating Posttion	20.7±1.5mm		

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



Microswitch SPDT, Long Roller



Part Number Table

Description		Operating force (gf)			OP	Max. FP	Part number
		В	C	D	(mm)	(mm)	Part number
Microswitch, SPDT, 10A, Long Roller	40	80	100	170	20.7 ±2	24	M141T02-AC0305D

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from regligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

