## PTE7300 SERIES

HERMETIC DIGITAL PRESSURE SENSOR

The PTE7300 pressure sensor is the sensing platform from Sensata Technologies offering best in class accuracy with excellent mechanical shock resistance and EMC protection to meet the most demanding applications in mid to high pressure ranges. Available with a wide range of ports, low power consumption, fast response time, and increased sensor diagnostics capabilities, enable customers to standardize and simplify designs.



### Features

• Cyclical Redundancy Check (CRC) assures you that communications and data are reliable.

Sensata

**Technologies** 

- Pressure ranges from 0-10 bar to 0-600 bar (0-145 to 0-8700 psi)
- Best in class accuracy and fast response time to meet the highest performance applications
- Digital pressure output and I<sup>2</sup>C bus for connecting multiple devices
- Low power consumption to optimize energy efficiency
- High Resistance to Electromagnetic Noise (EMC)
- Stainless steel, fully hermetic, IP69K sensor package and hermetic port modules available to meet the harshest environments
- Snubber option for dampening of pressure spikes due to hammer and cavitation
- REACH/RoHS/CE /UKCA compliant<sup>(1)</sup>

### Applications

- Smart Water Networks and Smart Fire Hydrants
- Medical and Industrial Gas Monitoring
- OEM Hydraulic and Process Control
- Hydraulics and Pneumatics
- Mobile Hydraulics and Off-Highway Vehicles
- Pumps and Compressors
- Air Conditioning and Refrigeration Systems
- Plant Engineering and Automation

SPECIFICATIONS

### Electrical

Pressure Ranges	0-10 bar to 0-600 bar (0-145 psi to 0-8700 psi)					
Pressure Reference	Gauge (Module) and Sealed Gauge (fully hermetic sensor)					
Supply Voltage	3.3VDC to 5.5VDC					
Digital Interface	I <sup>2</sup> C with CRC (memory integrity, and data transmission)					
Device Address	0xDA (including CRC) 0x6C (excluding CRC)					
<b>Operating Current In Sleep Mode</b>	6.5 uA (typical)					
<b>Operating Current In Active Mode</b>	3.7mA typical (4mA maximum)					
Available Data	Pressure(int16)Bridge temperature(int16)Status(int16)Device serial(int32)					
Resolution	15 bit					
Response Time	< 1 ms @ Default setting and active mode					
Probe Configurations	On-demand, single cycle					

Recommended pull-up resistors	1kOhm to 10kOhm, depending on cable length					
External Capacitive Load for I2C Bus Line	400 pF max (depends on the cable length)					
ESD <sup>(1)</sup>	±4KV Contact; ±8KV Air					
Radiated Immunity <sup>(1)</sup>	80-1000MHz 10V/m 1400-2000MHz 3V/m 2000-2700MHz 1V/m					
Conducted Immunity <sup>(1)</sup>	0.15-80MHz 3Vrms					
Magnetic Immunity <sup>(1)</sup>	3 A/m for 5 minutes					

## Physical

Proof Pressure	60bar for full scale pressure = 10-29bar 200bar for full scale pressure = 30-100bar 500bar for full scale pressure = 101-250bar 800bar for full scale pressure = 251-400bar 1200bar for full scale pressure = 401-600bar
Burst Pressure	200bar for full scale pressure = 10-29bar 2000bar for full scale pressure = 30-100bar 2500bar for full scale pressure = 101-250bar 4000bar for full scale pressure = 251-600bar
Vibration	IEC 60068-2-6 with 2.0mm displacement, Sensor: 30g (102000Hz); Module: 20g (102000Hz)
Mechanical Shock	IEC 60068-2-27, 50g min (Module); IEC 60068-2-27, 500g min (fully hermetic sensor)
Drop (any Axis)	1m
Water Hammer	1.6X full scale pressure for 100k cycles, 1.3xFS for 200k cycles
Ingress Protection	IP00 (Module), IP69K (fully hermetic sensor)
Media Compatibility	Fluids and Gases compatible with 17-4PH stainless steel

## Performance


Pressure (Best Fit Straight) <sup>(3)</sup>	±0.25% FS @ 25°C
Pressure (Total Error Band) <sup>(4)</sup>	+/-1.5%FS @-20° to 85°C
Operating Endurance	>10M cycles
<b>Operating Ambient Temperature</b>	-40° to +100°C
Operating Media Temperature	-40° to +125°C
Storage Temperature	-40° to +125°C




### **Overall Dimensions**

7/16-20 UNF-2A (MALE)

# ¢23.5 M12x1 0 F HEX24





1/4-18 NPTF




G1/4A DIN 3852-E

### 1/4-19 PT (R1/4)





## **Electrical Connector**

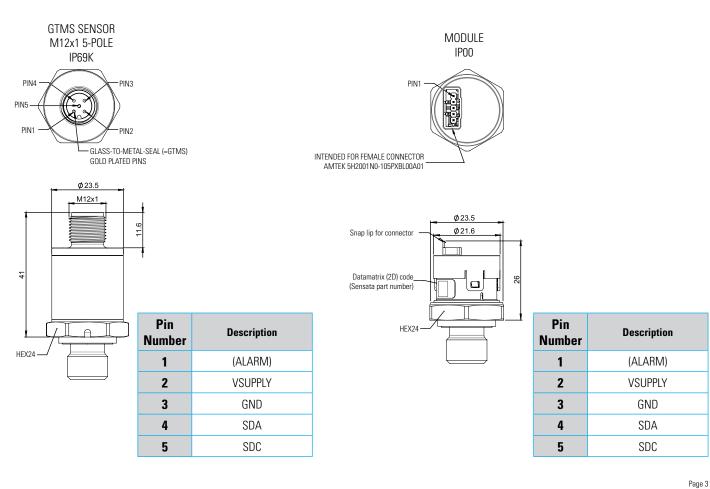



### Example : PTE7300-14AM-1B016SN

PTE7300-XXXM-XXXXXSX = GTMS-Sensor (Seal Gauge) PTE7300-XXXN-XXXXBX = Module (Gauge) PTE7300 with G1/4A thread with external FKM o-ring seal, M12x1 hermetic connector,  $\rm I^2C$  with 15 bit resolution output, 16bar full scale pressure, sealed gage, with no snubber.

PTE7300 - 1	4	Α	М -	1	В	016	S	Ν
Series								
PTE7300								
SEA Туре								
<b>1:</b> 0~29bar								
2: 30~100bar 3: 101~250bar								
<b>4:</b> 251~400bar								
<b>5:</b> 401~600bar								
ЕМА Туре								
<b>4:</b> I2C								
Pressure Port								
<b>A:</b> G1/4A DIN 3852-E								
<b>B:</b> 1/4-19PT (R1/4)								
C: 7/16-20 UNF-2A (MALE) D: 1/4-18NPT								
Electrical Connector								
M: M12x1 5-pin glass-to-metal-seal (sensor only)								
N: 5x1 2mm pitch pin to header (module only)								
External Sealing								
0: No sealing ring								
1: FKM (Viton) sealing ring (only for G1/4A pressure 2: HNBR sealing ring (only for 7/16-20 UNF-2A MAL	e port) E prossure port)							
Output Type								
<b>B:</b> I <sup>2</sup> C (13 ENOB + CRC)								
Pressure Range								
010: 0-10bar								
<b>016:</b> 0-16bar								
025: 0-25bar								
<b>040:</b> 0-40bar								
<b>050:</b> 0-50bar <b>060:</b> 0-60bar								
100: 0-100bar								
160: 0-160bar								
<b>200:</b> 0-200bar								
<b>250:</b> 0-250bar <b>350:</b> 0-350bar								
<b>400:</b> 0-400bar								
<b>500:</b> 0-500bar (sensor only)								
600: 0-600bar (sensor only)								
Pressure Reference								
S: Sealed gauge (M12 5-pin only) B: Gauge (module only)								
Snubber								
N: No snubber								

**S:** Snubber with 0.5 damping hole







<sup>(1)</sup> If applicable, the customer shall verify if the pressure module (PTE7300-XXXN-XXXXBX) is compliant to the CE EMC directive: 2014/30/EU in the customer's application

- <sup>(2)</sup> Temperature is indirectly measured at the sensing element and is for reference only
- <sup>(3)</sup> Best fit straight line accuracy includes errors from non-linearity, non-repeatability, and hysteresis
- (4) Total error band accuracy includes errors from non-linearity, non-repeatability, hysteresis, zero offset, full span offset, and thermal effects



DANGER

- RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE
- . The product's side panels may be hot, allow the product to cool before touching
- Follow proper mounting instructions including torque values
- · Do not allow liquids or foreign objects to enter this product

Failure to follow these instructions can result in serious injury, or equipment damage.



### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before installing or working with this equipment
- Verify all connections and replace all covers before turning on power
- Failure to follow these instructions can result in death or serious injury.

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS, OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

### CONTACT US

#### Americas +1 (800) 350 2727 sensors@sensata.com

Sensors@sensata.com Switches@sensata.com Europe, Middle East & Africa +359 (2) 809 1826 pressure-info.eu@sensata.com Asia Pacific sales.isasia@list.sensata.com China +86 (21) 2306 1500 Japan +81 (45) 277 7117 Korea +82 (31) 601 2004 India +91 (80) 67920890 Rest of Asia +886 (2) 27602006 ext 2808