






## 2x2 MIMO WiFi 6E Antenna FPCB Antenna

W6109B0100 – 2.4 to 2.48 GHz/5.15 to 7.125GHz



### Features & Applications:

-  FPCB with adhesive
-  Size 34.6x7.6mm
-  1.13mm cable with U.FL Compatible
-  RoHS Compliant
-  WiFi 6E, WiFi 7

### ELECTRICAL SPECIFICATIONS @ 25°C

#### General Specifications

Antenna type	Nominal Impedance	Polarization	Radiation pattern	Power withstanding
Dipole	50Ω	Linear	Omni	1W
<b>Frequency (MHz)</b>		2400-2480		5150-7125
<b>Return Loss(dB)</b>		<7		<7
<b>Peak Gain (dBi)</b>		3.2		6.9
<b>Efficiency (%)</b>		49.9		86.9

### MECHANICAL SPECIFICATIONS

#### W6109B0100

Dimension (Length x Width)	Material	Color	Cable type	Connector Type	Cable length
34.6mm x 7.6mm	FPCB	Black	1.13 coaxial cable	U.FL Compatible	100mm
<b>Thickness</b>	<b>Weight</b>				
2.3mm	0.724g				

### ENVIRONMENTAL SPECIFICATIONS

#### W6109B0100


Storage Temperature	Operating Temperature	Ingress Protection	RoHS Compliant
-40/+85° C	-40/+85° C	N/A	Yes

2x2 MIMO WiFi 6E Antenna  
FPCB Antenna

W6109B0100 – 2.4 to 2.48 GHz/5.15 to 7.125GHz

Mechanical Drawing

W6109B0100

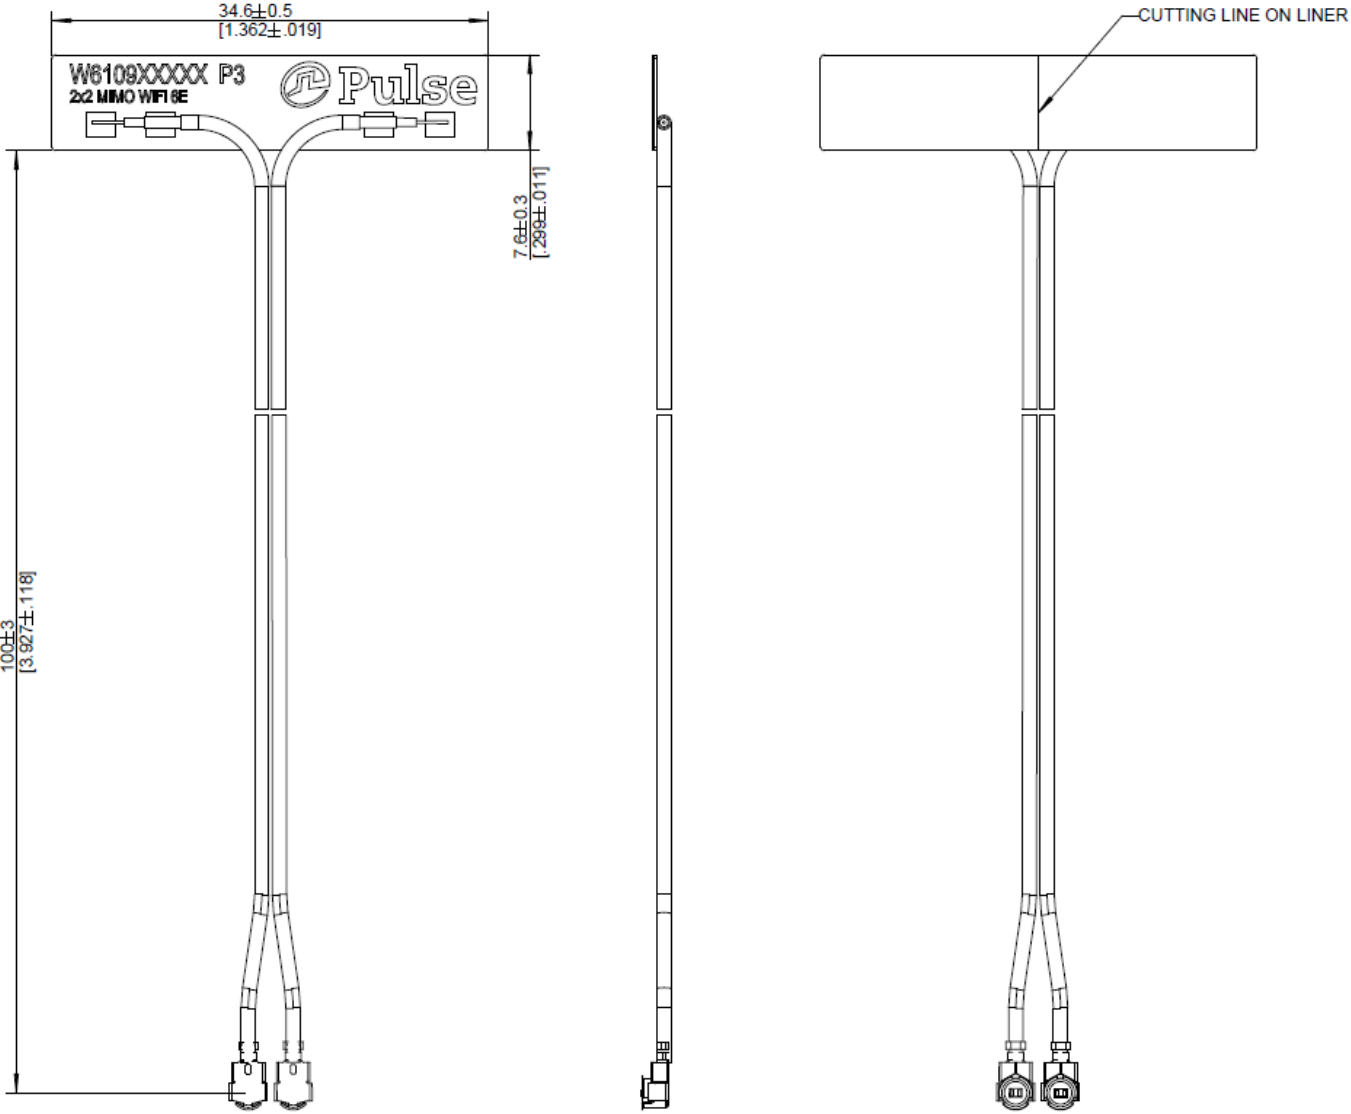

Test Setup

Dimensions: MM/inches Unless otherwise specified, all tolerances are  $\pm 0.010$  (0.25mm)


## 2x2 MIMO WiFi 6E Antenna FPCB Antenna

W6109B0100 – 2.4 to 2.48 GHz/5.15 to 7.125GHz

### General / Chamber Setup

- Measured at Pulse YP (ETS Lindgren Chamber)
- Test data measured with 100mm cable W6109B0100
- Antenna mounted on 2mm thick PC plate
- 

*Measurement setup*

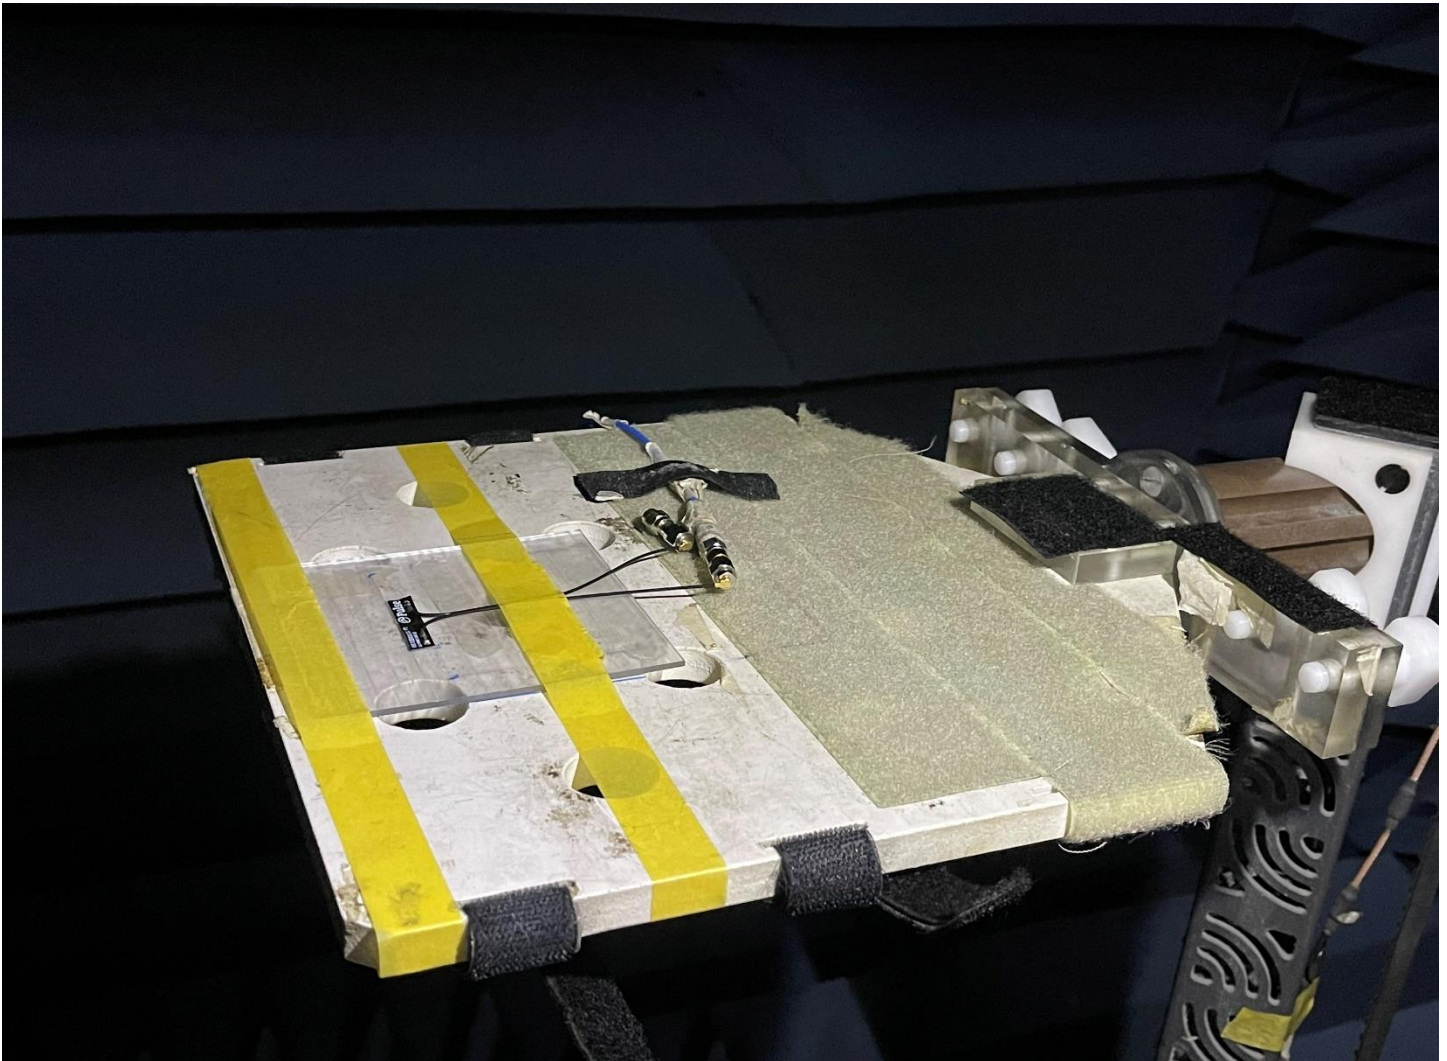


# 2x2 MIMO WiFi 6E Antenna FPCB Antenna

W6109B0100 – 2.4 to 2.48 GHz/5.15 to 7.125GHz


## Charts – Return Loss

Test data

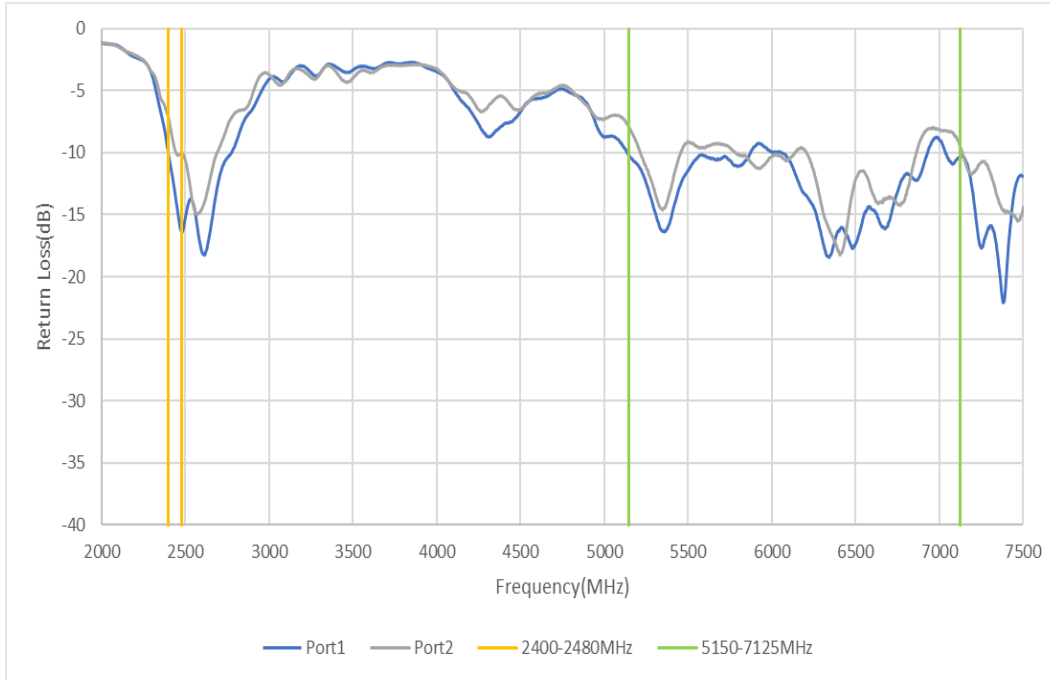

## Charts - Isolation

Test data

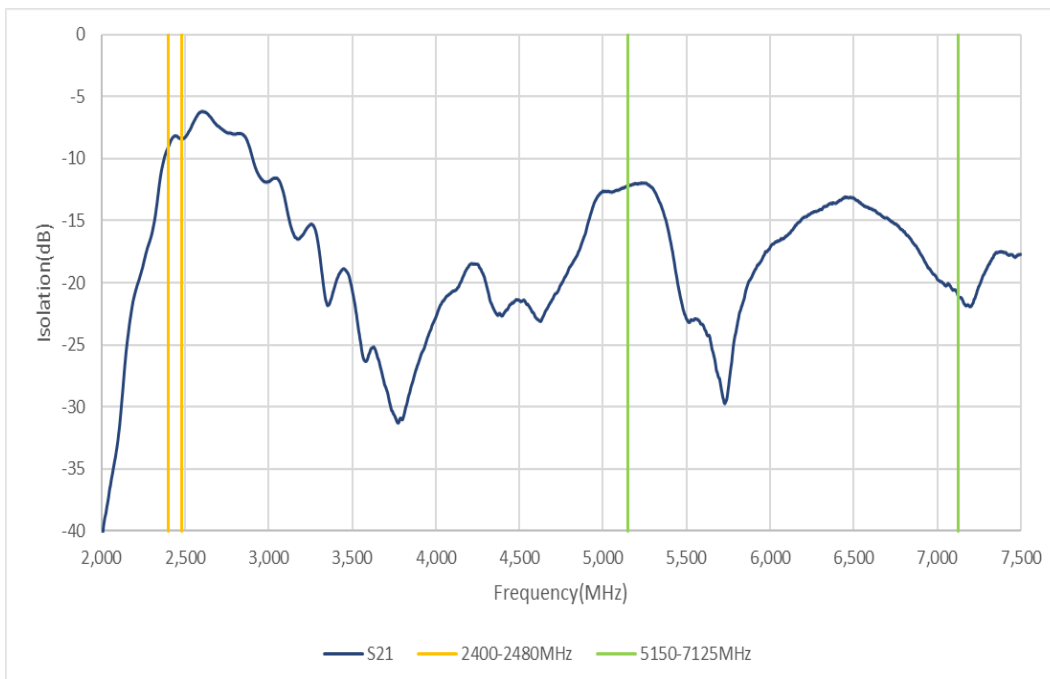


2x2 MIMO WiFi 6E Antenna  
FPCB Antenna

W6109B0100 – 2.4 to 2.48 GHz/5.15 to 7.125GHz


Charts – Peak Gain(dBi)

Test data

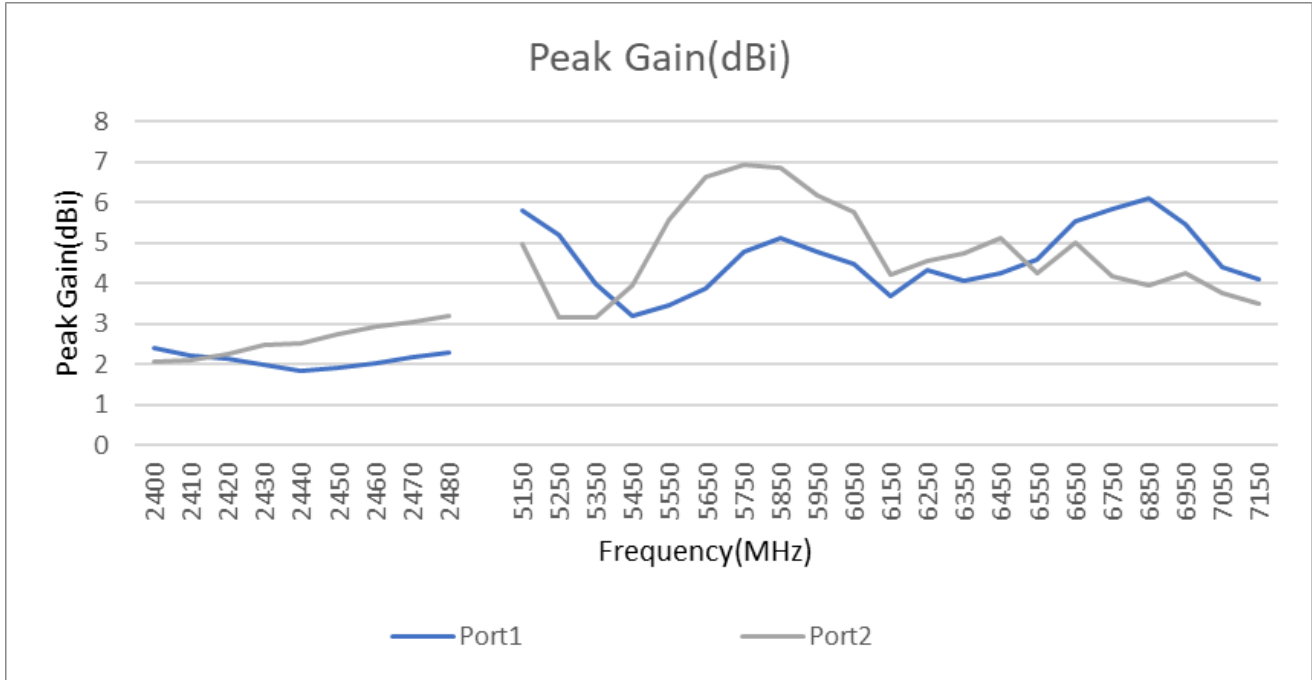

Charts – Efficiency(%)

Test data

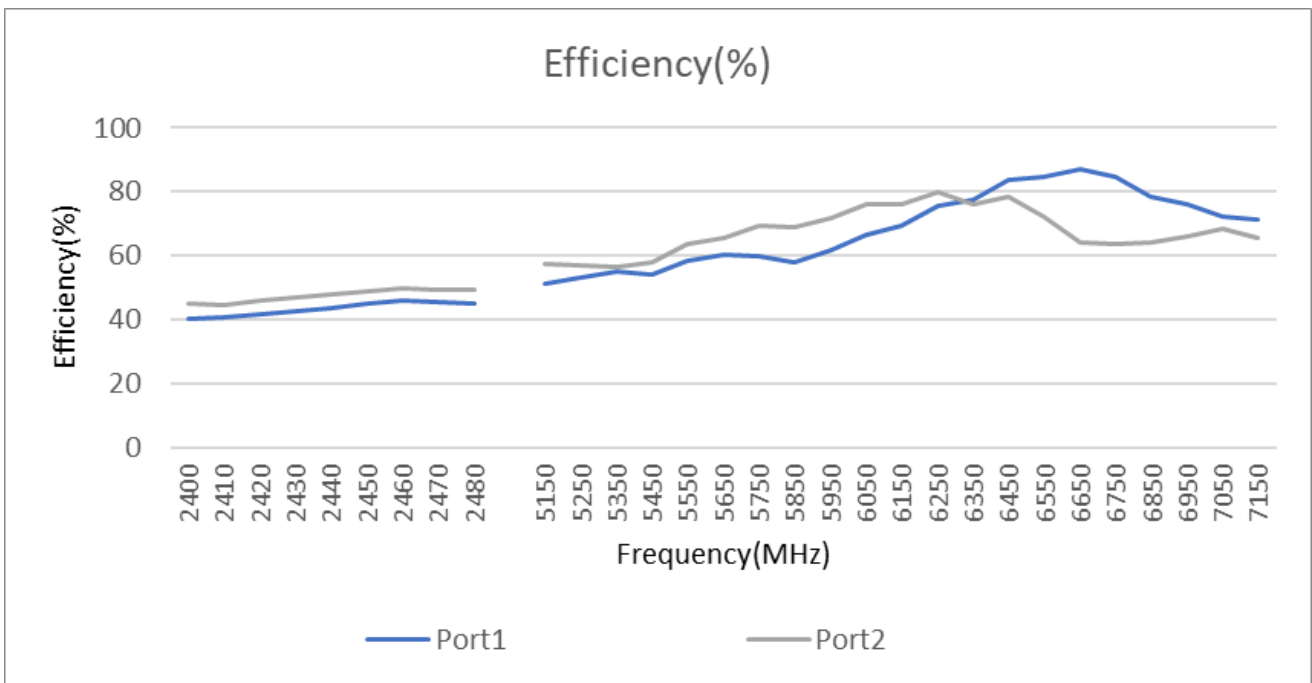


# 2x2 MIMO WiFi 6E Antenna FPCB Antenna


W6109B0100 – 2.4 to 2.48 GHz/5.15 to 7.125GHz

## Radiation Pattern – XY and XZ Gain Plots


Test data

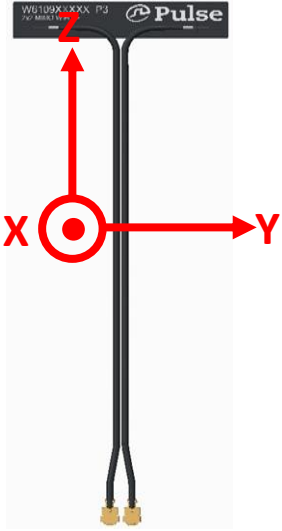

### XY Plane

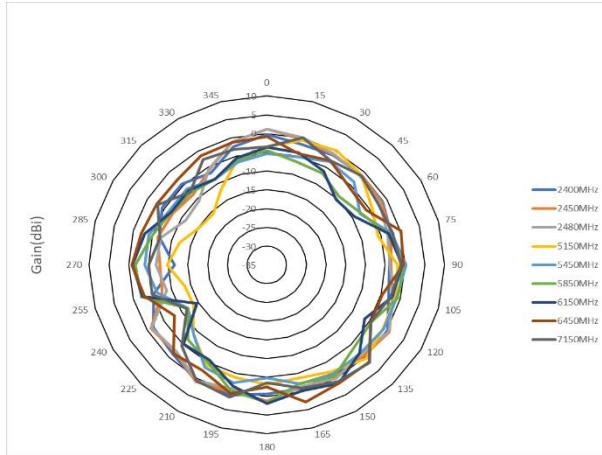


### XZ Plane

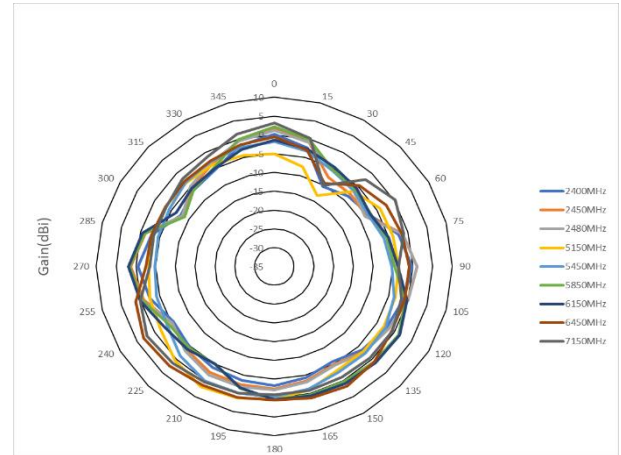

## Radiation Pattern – YZ Gain Plots

Test data

### YZ Plane

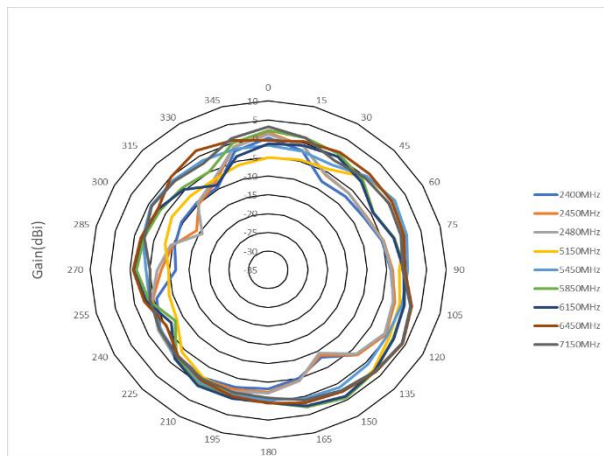


# 2x2 MIMO WiFi 6E Antenna FPCB Antenna


W6109B0100 – 2.4 to 2.48 GHz/5.15 to 7.125GHz

## Radiation Pattern – XY and XZ Gain Plots


Test data

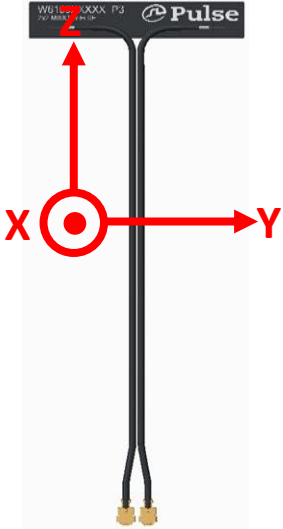

### XY Plane

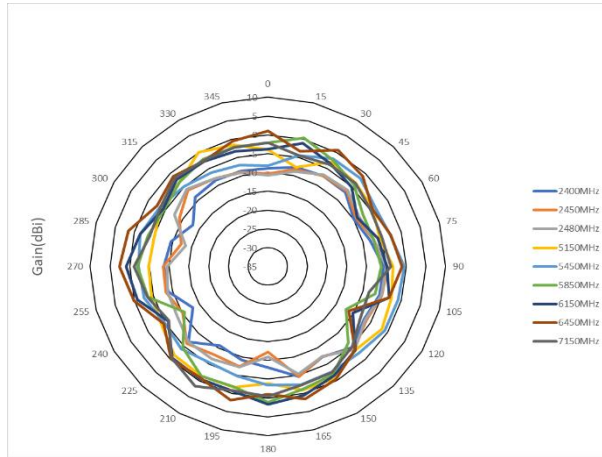


### XZ Plane

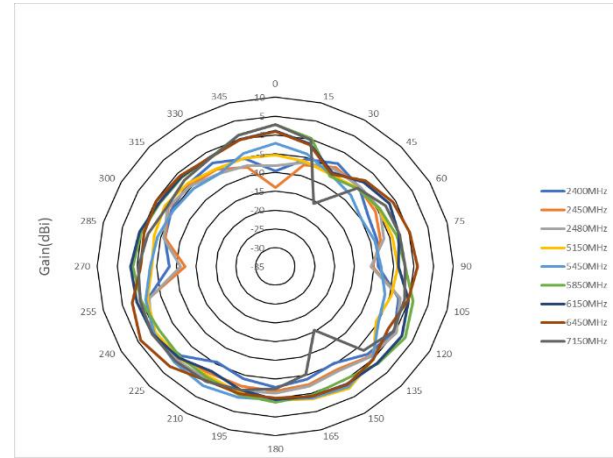

## Radiation Pattern – YZ Gain Plots

Test data

### YZ Plane

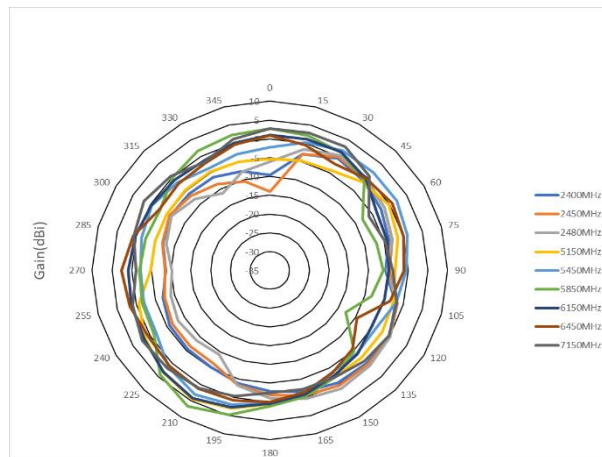

## 2x2 MIMO WiFi 6E Antenna FPCB Antenna

W6109B0100 – 2.4 to 2.48 GHz/5.15 to 7.125GHz

### PACKAGING

W6109B0100

10PCS/PE bag  
10 PE bag/foam bag  
50 foam bag/ carton box  
Total 5000PCS/Carton box  
Package box: 4600mm\*235mm\*140mm



#### For More Information:

Americas - [antennas.us@pulseelectronics.com](mailto:antennas.us@pulseelectronics.com) | Europe – [antennas.eu@pulseelectronics.com](mailto:antennas.eu@pulseelectronics.com) | Asia – [antennas.as@pulseelectronics.com](mailto:antennas.as@pulseelectronics.com) | Questions? +1-800-ANTENNA  
Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright , 2020. Pulse Electronics, Inc. All rights reserved.  
Company address: Pulse Electronics, a YAGEO Company, 15255 Innovation Drive, Suite #100, San Diego, CA 92128.

***'YAGEO Corporation and its affiliates do not recommend the use of commercial, automotive, and/or COTS grade products for high reliability applications or manned space flight.'***