



*i-CON VARIO 2 MK2 with i-TOOL MK2 and X-TOOL VARIO*

# i-CON VARIO 2 MK2

## Multichannel soldering and desoldering station

The multichannel soldering and desoldering station **i-CON VARIO MK2** provides the professional user with two soldering tools that can be used simultaneously.

All functions, including the generation of the air and the vacuum required in the process are bundled in the supply unit, which is equipped with the easy to operate i-OP and its clearly arranged display. In addition, the soldering stations have interfaces for the Ersa solder fume extraction units or infrared heating plates, as well as an USB port. Via a micro-SD card, the stations can be quickly and safely configured. Therefore, they are optimally prepared for all applications in professional electronics manufacturing – including ESD protected zones.

The high-performance bushing A2 can be used to operate either the i-TOOL AIR S (200 W) or the i-TOOL HP (250 W). The station without the pumps is for users that want to use exclusively the i-TOOL HP and the i-TOOL.



### Connectable tools:

- hot air iron  
**i-TOOL AIR S** (200 W)
- soldering iron  
**i-TOOL MK2** (150 W)
- desoldering tweezers  
**CHIP TOOL VARIO** (80 W)
- desoldering tool  
**X-TOOL VARIO** (150 W)
- high-power soldering iron  
**i-TOOL HP** (250 W)

## TIP'N' TURN



*Super fast tip change: by hand or using the 0A58 tool holder which is compatible with i-TOOL TRACE and all i-TOOL MK2 series soldering irons (optional).*

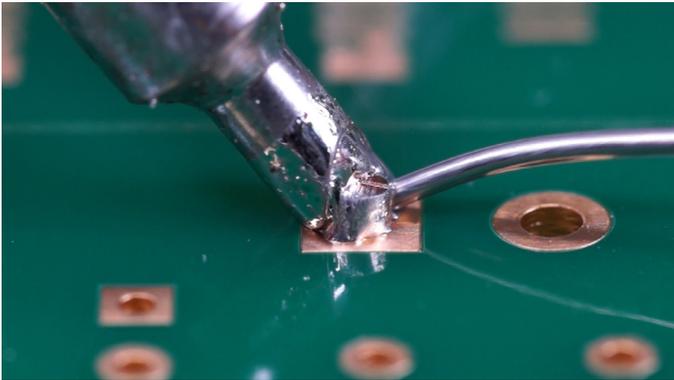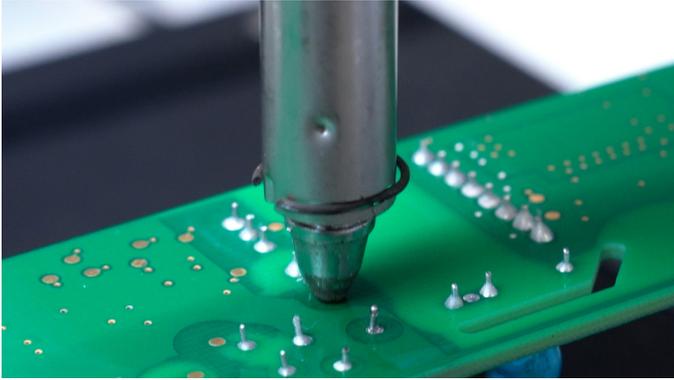

**Technical data:**

dimensions (W x D x H)	150 x 175 x 105 mm
weight	3.7 kg
voltage	230 V AC, 50 Hz
nominal power	200 W
design	antistatic
temperature range	50 – 450 °C

**Order information:**

Order No.	Description
01CV2035A	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with i-TOOL AIR S
01CV2035AC	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with i-TOOL AIR S and CHIP TOOL VARIO
01CV2005AI	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with i-TOOL MK2 and i-TOOL AIR S
01CV2035XV	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with X-TOOL VARIO
01CV2005XVI	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with X-TOOL VARIO and i-TOOL MK2
01CV2005AXV	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with X-TOOL VARIO and i-TOOL AIR S
01CV2005HP	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with i-TOOL HP
0A58	Tip holder with Tip'n'Turn function

**Soldering tools and accessories**

	■	■	■	■	■	■	■



further information on our website or webshop

Ersa GmbH  
Leonhard-Karl-Str. 24  
97877 Wertheim  
Germany

Tel. +49 9342 800-0  
Fax +49 9342 800-127  
info@ersa.de  
www.ersa.com

France: kefrance@kurtzersa.com  
America: usa@kurtzersa.com

Mexico: info-kmx@kurtzersa.de  
China: asia@kurtzersa.com

