

# Industrial Fuse Links

## 10mm x 38mm

multicomp<sup>PRO</sup>

RoHS  
Compliant



### Application

- Lightning pre-backup protection, small distribution box, small power box, cable and circuit general protection

### Features

- Low voltage general purpose fuses.
- (gG) fuse-links with a full-range breaking capacity for general application.
- General purpose fuse-links used for the protection of cables against short-circuits.


### Agency Information

- Ref. to IEC 60269-2/GBT13539.2
- Manufactured under IATF 16949 quality system

### Specifications

Part Number	Rated Current	Ampere Code	Rated Voltage	Breaking Capacity
MP013315	10 A	2100	690V AC	100 kA@ 690V AC
MP013316	16 A	2160		
MP013317	20 A	2200		
MP013318	25 A	2250		
MP013319	32 A	2320		

### Dimensions

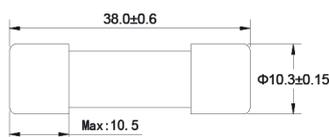

Dimensions : Millimetres

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
sg.element14.com/b/multicomp-pro


multicomp<sup>PRO</sup>

# Industrial Fuse Links

## 10mm x 38mm

### Time Current Curve

aR Average Current Curve(I-T Curve)

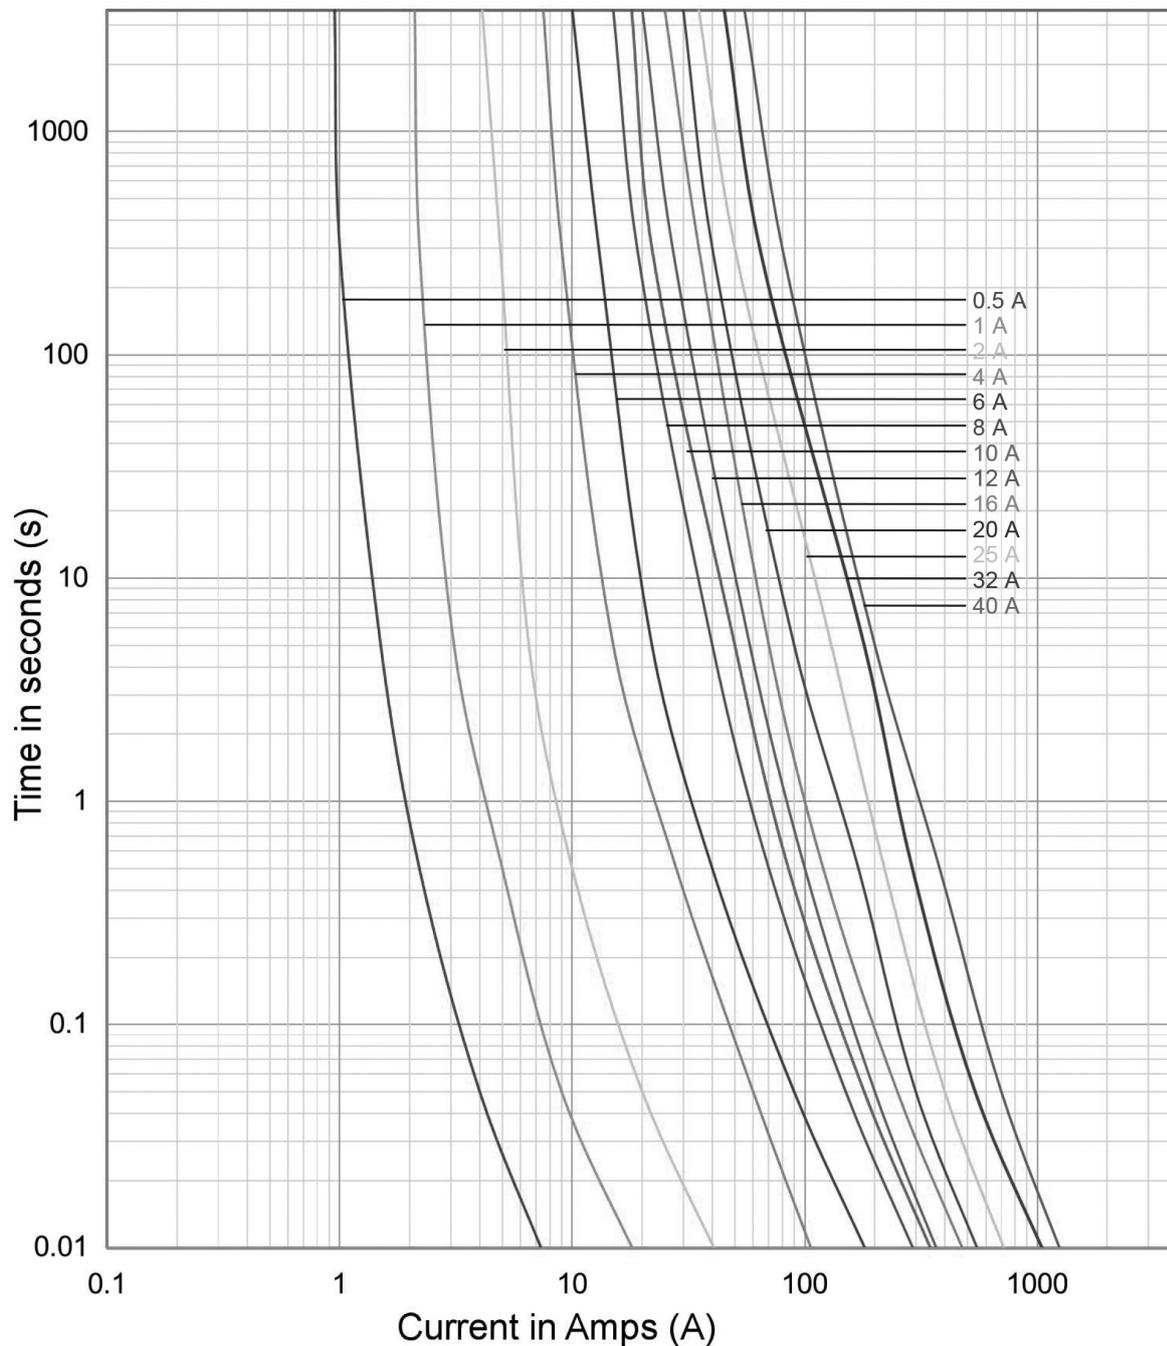


# Industrial Fuse Links

## 10mm x 38mm



### Temperature Derating Curve

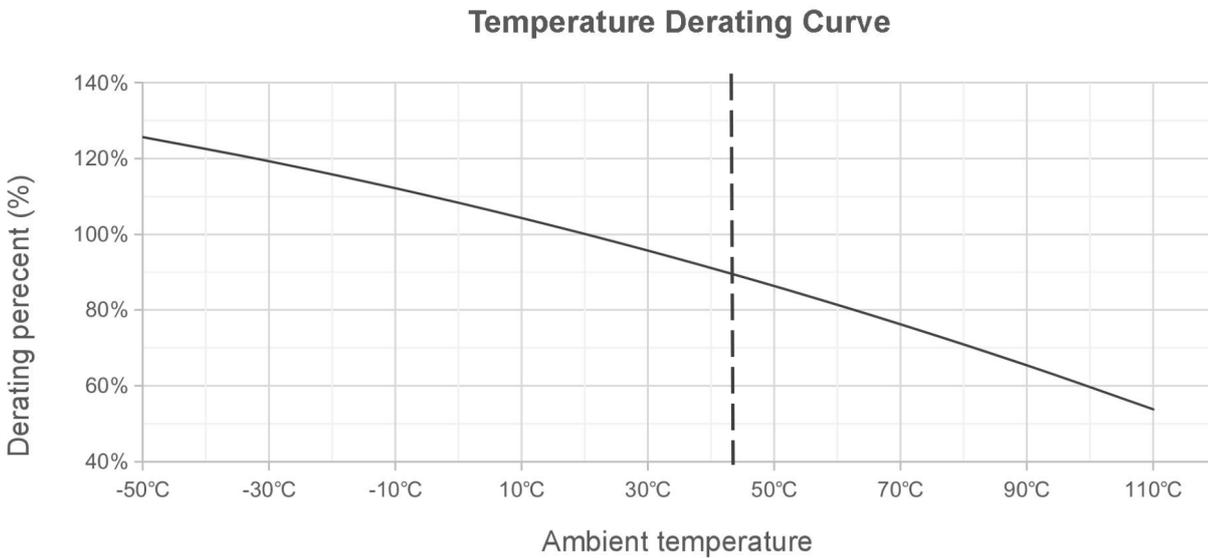

### Part Number Table

Description	Part Number
Industrial Fuse Link, Cartridge, 10A	MP013315
Industrial Fuse Link, Cartridge, 16A	MP013316
Industrial Fuse Link, Cartridge, 20A	MP013317
Industrial Fuse Link, Cartridge, 25A	MP013318
Industrial Fuse Link, Cartridge, 32A	MP013319

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

