# multicomp PRO



### RoHS Compliant

### **Description**

This product is a 13.3" (16:9) inch diagonally measured active display with high resolution 1920×1080 display and high brightness. This model is composed of a TFT LCD panel, backlight system and HDMI input. It is designed to make Raspberry Pi usage easy. Can simply use this TFT display with your Raspberry Pi, or also you can use this as computer display with any device which has HDMI output. This 13.3" TFT model comes in 1920×1080 resolution that would be great for embedded computing usage too.

### **Specifications**

Panel Size : 13.3"

 Number of Pixels
 : 1920 (W) × RGB × 1080 (H) Pixels

 Active Area
 : 293.76mm (W) × 165.24mm (H)

 Pixel Pitch
 : 0.153mm (W) × 0.153mm (H)

Outline Dimension : 307.6mm (W) × 183.05mm (H) × 22.2mm (T)

Number of Colours : 16.7M

Display Mode : Normally Black
View Direction : Free Direction
Display Format : RGB vertical stripe
Surface Treatment : Anti-Glare (3H)
Contrast Ratio : 1000 (Typ.)
Luminance : 1000cd/m² (Typ.)

Video Input Interface : HDMI (Compliance HDMI V1.4)

Backlight : White LED

Operation Temperature : -20°C to +70°C

Storage Temperature : -30°C to +80°C

Weight : 440g

### **Absolute Maximum Ratings**

## Electrical Absolute Rating HDMI TFT LCD Module

Item	Symbol	Val	ues	Unit	Note	
item	Syllibol	Min. Max.		Onit	Note	
Power supply voltage	12V	10	14	V	-	

### **Environment Absolute Rating**

Item	Cumbal	Values			Unit	Note
item	Symbol	Min.	Тур.	Max.	Unit	Note
Operating Temperature	Тор	-20	-	+70	°C	Ambient
Storage Temperature	Tst	-30	-	+80		Temperature

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro





### **Electrical Characteristics**

### **HDMI TFT LCD Module**

Item	Symbol		Values			Note
item	Symbol	Min.	Тур.	Max.	Unit	Note
Supply Voltage	12V	11	12	13	V	
PWM frequency		100	-	10K	Hz	
PWM Duty		17	-	100	%	<17%=OFF
PWM Dimming	VPWM-IH	3.3	-	8	V	
Voltage	VPWM-IL	-	0.3	-	V	
Supply Current	ICC(12V)	-	1250	1400	mA	
LED life time		-	50000	-	Hr	(1)

#### Note 1:

The "LED life time" is defined as the module brightness decrease to 50% original brightness that the ambient temperature is 25°C 60% RH.

### **Optical Characteristics**


Ite	em	Symbol	Condition	Min.	Тур.	Max.	Unit
Brightness		-		800	1000	-	cd/m <sup>2</sup>
Uniformity		B-uni		-	70	-	%
Contras	Contrast Ratio			700	1000	-	-
Respon	se Time	Tr + Tf		-	30	35	ms
	White	Wx	Note1, Note 3,	0.247	0.297	0.347	-
	vvnite	Wy	(θ= 0°,	0.301	0.351	0.401	-
	Red	Rx	Normal	0.542	0.592	0.642	
Colour	Red	Ry	Viewing Angle)	0.31	0.360	0.410	
Chromaticity	Green	Gx	,g.o,	0.292	0.342	0.392	
	Green	Gy		0.507	0.557	0.607	
	Blue	Вх		0.108	0.158	0.208	
	ыие	Ву		0.059	0.109	0.159	
	Harizantal	θх+			85		
View engle	Horizontal	θх-	Centre		85		
View angle	Vertical	θΥ+	CR≥10	_	85	_	
	vertical	θΥ-			85		

Note: The following optical specifications shall be measured in a darkroom or equivalent state(ambient luminance ≤1 lux, and at room temperature). The operation temperature is 25°C±2°C. The measurement method is shown in Note1.





Note 1: The method of optical measurement

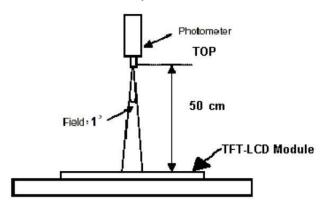


**Note 2:** Measured at the centre area of the panel and at the viewing angle of the  $\theta x = \theta y = 0^{\circ}$ 


Note 3: Definition of Contrast Ratio (CR):

CR = Luminance with all pixels in white state ÷ Luminance with all pixels in Black state

Note 4: Definition of Viewing Angle:

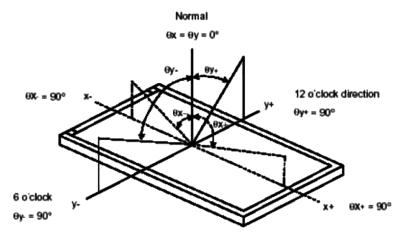

Note 5: Definition of Brightness Uniformity (B-uni):

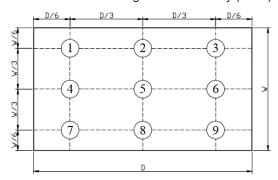


B-uni = (Minimum luminance of 9 points÷Maximum luminance of 9 points) X 100%

## multicomp PRO

### Note 6: Definition of Response Time:


The Response Time is set initially by defining the "Rising Time (Tr)" and the "Falling Time (Tf)" respectively. Tr and Tf are defined as following figure

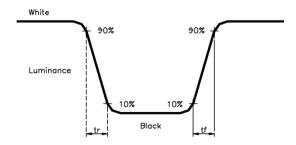

### Note 7: Definition of Chromaticity:

The colour coordinates (Wx,Wy),(Rx,Ry),(Gx,Gy),and (Bx,By) are obtained with all pixels in the viewing field at white, red, green, and blue states, respectively.

### Diagram

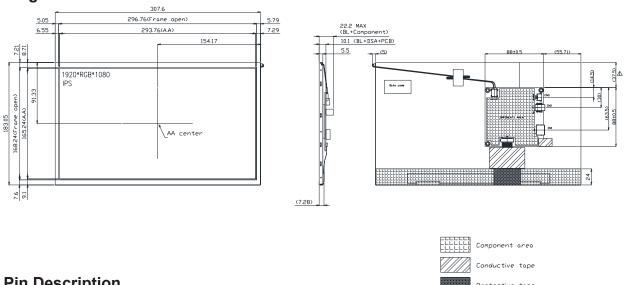

### **Pin Description**

### **Power Input (CN1)**

Pin No.	Symbol	I/O	Function	Note
1	12V	Р	Power Supply +12V	12V
2	GND	Р	Ground	⊝@⊕

### **Back-light Control (CN2)**

Pin No.	Symbol	I/O	Function	Note
1	GND	Р	Ground	-
2	PWM	- 1	Back-light Dimming control (internal pull up to 3.3V)	*
3	N.C.	-	N.C.	-

<sup>\*</sup> When PWM not connected, back-light default is typical brightness and normally turn on.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro



Dimensions: Millimetres




### HDMI (CN3)

Pin No.	Symbol	I/O	Function	Note
1	TMDS 2+	-	TMDS Data2+	
2	GND	Р	TMDS Data2 Shield	
3	TMDS 2-	I	TMDS Data2-	
4	TMDS 1+	I	TMDS Data1+	
5	GND	Р	TMDS Data1 Shield	
6	TMDS 1-	Ι	TMDS Data1-	
7	TMDS 0+	-	TMDS Data0+	
8	GND	Р	TMDS Data0 Shield	
9	TMDS 0-	I	TMDS Data0-	
10	TMDS CLK+	I	TMDS Clock+	
11	GND	Р	TMDS Clock Shield	
12	TMDS CLK-	I	TMDS Clock-	
13	N.C.	-	N.C.	
14	N.C.	-	N.C.	
15	DDC_SCL	I	IIC SCL to EDID ROM	
16	DDC_SDA	I/O	IIC SDA to EDID ROM	
17	GND	Р	DDC/CEC Ground	
18	HD_5V	Р	+5V Power	
19	HPD	0	Hot Plug Detect	

### **Block Diagram**

### TFT LCD Module



### **Part Number Table**

Description	Part Number
TFT LCD, 13.3", HDMI, 1920×1080	MP013335

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

