# multicomp PRO



# RoHS Compliant

### **Description**

This product is a 18.5" (16:9) diagonally measured active display with high resolution 1920×1080 display and high brightness. This model is composed of a TFT LCD panel, backlight system and HDMI input. It is designed to make Raspberry Pi usage easy. Can simply use this TFT display with your Raspberry Pi, or also can use this as computer display with any device which has HDMI output. This 18.5" TFT model comes in 1920×1080 resolution that would be great for embedded computing usage too.

## **Specifications**

Panel Size : 18.5"

 Number of Pixels
 : 1920 (W) × RGB × 1080 (H) Pixels

 Active Area
 : 408.96mm (W) × 230.04mm (H)

 Pixel Pitch
 : 0.213mm (W) × 0.213mm (H)

Outline Dimension : 430.4mm (W) × 254.6mm (H) × 23mm (T)

Number of Colours : 16.7M

Display Mode : Normally Black
View Direction : Free direction
Display Format : RGB vertical stripe
Surface Treatment : Anti-Glare (3H)
Contrast Ratio : 1000 (Typ.)
Luminance : 1000cd/m² (Typ.)

Video Input Interface : HDMI (Compliance HDMI V1.4)

Backlight : White LED

Operation Temperature : -20°C to +70°C

Storage Temperature : -20°C to +70°C

Weight : 1385g

## **Absolute Maximum Ratings**

# Electrical Absolute Rating HDMI TFT LCD Module

| ltem                 | Symbol   | Val       | ues | Unit  | Note |
|----------------------|----------|-----------|-----|-------|------|
| item                 | Syllibol | Min. Max. |     | Offic | Note |
| Power supply voltage | 12V      | 11        | 14  | V     | -    |

#### **Environment Absolute Rating**

| lto m                 | Cumbal | Values |      |      | Unit | Note        |
|-----------------------|--------|--------|------|------|------|-------------|
| Item                  | Symbol | Min.   | Тур. | Max. | Unit | Note        |
| Operating Temperature | Тор    | -20    | -    | +70  | °C   | Ambient     |
| Storage Temperature   | Tst    | -20    | -    | +70  |      | Temperature |

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro





#### **Electrical Characteristics**

#### **HDMI TFT LCD Module**

| Item           | Symbol   |       | Values |      |      | Note     |
|----------------|----------|-------|--------|------|------|----------|
| item           | Symbol   | Min.  | Тур.   | Max. | Unit | Note     |
| Supply Voltage | 12V      | 11    | 12     | 13   | V    |          |
| PWM frequency  |          | 100   | -      | 10K  | Hz   |          |
| PWM Duty       |          | 17    | -      | 100  | %    | <17%=OFF |
| PWM Dimming    | VPWM-IH  | 3.3   | -      | 8    | V    |          |
| Voltage        | VPWM-IL  | 0     | -      | 0.3  | V    |          |
| Supply Current | ICC(12V) | -     | 2.53   | 2.63 | А    |          |
| LED life time  |          | 50000 | -      | -    | Hr   | (1)      |

#### Note 1:

The "LED life time" is defined as the module brightness decrease to 50% original brightness that the ambient temperature is  $25^{\circ}$ C 60% RH.

# **Optical Characteristics**


| Ite          | em                | Symbol         | Condition         | Min.  | Тур.  | Max.  | Unit              |
|--------------|-------------------|----------------|-------------------|-------|-------|-------|-------------------|
| Brightness   |                   | -              |                   | 800   | 1000  | -     | cd/m <sup>2</sup> |
| Uniformity   |                   | B-uni          |                   | 80    | 85    | -     | %                 |
| Contras      | Contrast Ratio CR |                |                   | 800   | 1000  | -     | -                 |
| Respon       | se Time           | Tr+ <b>T</b> f | ]                 | -     | 20    | 40    | ms                |
|              | White             | Wx             | Note1,<br>Note 3, | 0.249 | 0.299 | 0.349 | -                 |
|              | vvnite            | Wy             | (θ= 0°,           | 0.265 | 0.315 | 0.365 | -                 |
|              | Red               | Rx             | Normal            | 0.596 | 0.646 | 0.696 |                   |
| Colour       |                   | Ry             | Viewing<br>Angle) | 0.283 | 0.333 | 0.383 |                   |
| Chromaticity | Green             | Gx             | 79.57             | 0.255 | 0.305 | 0.355 |                   |
|              | Green             | Green          |                   | 0.565 | 0.615 | 0.665 |                   |
|              | Blue              | Вх             |                   | 0.105 | 0.155 | 0.205 |                   |
|              | Blue              | Ву             |                   | 0.01  | 0.06  | 0.11  |                   |
|              | Horizontal        | θх+            |                   |       | 88    |       |                   |
| Viou angla   | Horizoniai        | θх-            | Centre<br>CR≥10   |       | 88    |       |                   |
| View angle   | \/4:1             | θΥ+            |                   | _     | 88    | _     | ·                 |
|              | Vertical          | θΥ-            |                   |       | 88    |       | ·                 |
| Colour Gamut |                   |                |                   | -     | 72    | -     | %                 |

Note: The following optical specifications shall be measured in a darkroom or equivalent state(ambient luminance  $\leq 1$  lux, and at room temperature). The operation temperature is  $25^{\circ}\text{C}\pm2^{\circ}\text{C}$ . The measurement method is shown in Note1.



# multicomp PRO

Note 1: The method of optical measurement

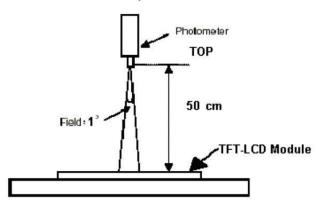


**Note 2:** Measured at the centre area of the panel and at the viewing angle of the  $\theta x = \theta y = 0^{\circ}$ 


Note 3: Definition of Contrast Ratio (CR):

CR = Luminance with all pixels in white state ÷ Luminance with all pixels in Black state

Note 4: Definition of Viewing Angle:

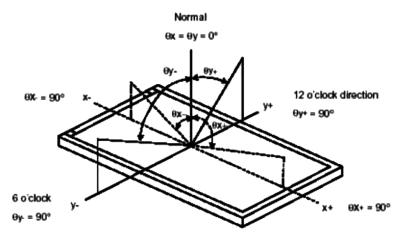

Note 5: Definition of Brightness Uniformity (B-uni):

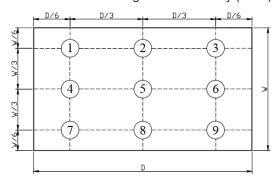


B-uni = (Minimum luminance of 9 points÷Maximum luminance of 9 points) X 100%



#### Note 6: Definition of Response Time:


The Response Time is set initially by defining the "Rising Time (Tr)" and the "Falling Time (Tf)" respectively. Tr and Tf are defined as following figure

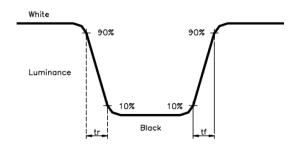

#### Note 7: Definition of Chromaticity:

The colour coordinates (Wx,Wy),(Rx,Ry),(Gx,Gy),and (Bx,By) are obtained with all pixels in the viewing field at white, red, green, and blue states, respectively.

# **Diagram**

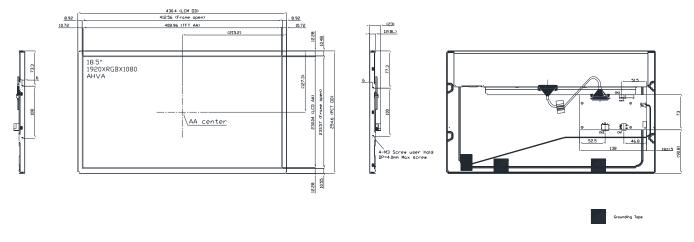

Dimensions: Millimetres

### **Pin Description**

### **Power Input (CN1)**

| Pin No. | Symbol | I/O | Function          | Note |
|---------|--------|-----|-------------------|------|
| 1       | 12V    | Р   | Power Supply +12V | 12V  |
| 2       | GND    | Р   | Ground            |      |

### **Back-light Control (CN2)**

| Pin No. | Symbol | I/O | Function  | Note |
|---------|--------|-----|---|------|
| 1       | GND    | Р   | Ground  | -    |
| 2       | N.C.   | -   | N.C.  | *    |
| 3       | PWM    | I   | Back-light Dimming control (internal pull up to 3.3V) | *    |

<sup>\*</sup> When PWM not connected, back-light default is typical brightness and normally turn on.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro






### HDMI (CN3)

| Pin No. | Symbol       | I/O | Function            | Note |
|---------|--------------|-----|---------------------|------|
| 1       | TMDS 2+      | -   | TMDS Data2+         |      |
| 2       | GND          | Р   | TMDS Data2 Shield   |      |
| 3       | TMDS 2-      | I   | TMDS Data2-         |      |
| 4       | TMDS 1+      | I   | TMDS Data1+         |      |
| 5       | GND          | Р   | TMDS Data1 Shield   |      |
| 6       | TMDS 1-      | Ι   | TMDS Data1-         |      |
| 7       | TMDS 0+      | -   | TMDS Data0+         |      |
| 8       | GND          | Р   | TMDS Data0 Shield   |      |
| 9       | TMDS 0-      | I   | TMDS Data0-         |      |
| 10      | TMDS<br>CLK+ | I   | TMDS Clock+         |      |
| 11      | GND          | Р   | TMDS Clock Shield   |      |
| 12      | TMDS<br>CLK- | I   | TMDS Clock-         |      |
| 13      | N.C.         | -   | N.C.                |      |
| 14      | N.C.         | -   | N.C.                |      |
| 15      | DDC_SCL      | I   | IIC SCL to EDID ROM |      |
| 16      | DDC_SDA      | I/O | IIC SDA to EDID ROM |      |
| 17      | GND          | Р   | DDC/CEC Ground      |      |
| 18      | HD_5V        | Р   | +5V Power           |      |
| 19      | HPD          | 0   | Hot Plug Detect     |      |

# **Block Diagram**

### TFT LCD Module



### **Part Number Table**

| Description                     | Part Number |
|---------------------------------|-------------|
| TFT LCD, 18.5", HDMI, 1920×1080 | MP013339    |

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

