
Ordering information

NBC series

-10 -472

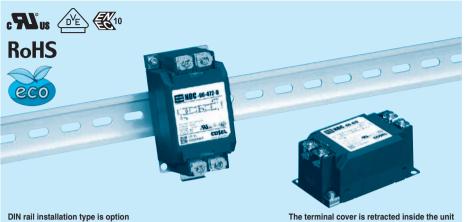

- ① Model Name ② Rated Current ③ Line to ground capacitor code:See table 1.1.

table1.1 Line to ground capacitor code

Code	Leakage Current (Input 125/250V 60Hz)	Line to ground capacitor (nominal value)	
681	75.5 μ A/ 150 μ A max	680pF	
102	0.13mA/ 0.25mA max	1000pF	
222	0.25mA/ 0.5 mA max	2200pF	
332	0.38mA/ 0.75mA max	3300pF	
472	0.5 mA/ 1.0 mA max	4700pF	

- *When the line to ground capacitor code is different, the attenuation characteristic is different.
- D:DIN rail installation type
 - $\boldsymbol{\ast}$ The dimensions change when the option is set. Refer to External view.

Features of NBC series


High-attenuation type of common mode noise from 150kHz to 1MHz (2-stage filter)

- · Single Phase 250 VAC
- · Push down type terminal block


Specifications

	Harris .	ND0 00 470	NDO 40 470	NDO 40 470	NDO 00 470	NDO 00 470	
No.	Items	NBC-06-472	NBC-10-472	NBC-16-472	NBC-20-472	NBC-30-472	
1	Rated Voltage[V]	AC 1 φ 250 / DC250					
2	Rated Current[A]	6	10	16	20	30	
3	Test Voltage (Terminal-Mounting Plate)	2,500 VAC (Cutoff Current = 20mA), 1minute at room temperature and humidity					
4	Isolation Resistance (Terminal-Mounting Plate)	500 VDC 100M Ω min at room temperature and humidity					
5	Leakage current 125/250V 60Hz	0.5mA/1.0mA max					
6	Voltage drop	1.0V max					
7	Safety agency approval temperatures	-25 to +85℃ (Refer to Derating Curve)					
8	Operating temperature	-40 to +85℃ (Refer to Derating Curve)					
9	Operating humidity 20 to 95%RH (Non condensing)						
10	Storage temperature/humidity -40 to +85°C/20 to 95%RH (Non condensing)						
11	Vibration	10 to 55Hz, 19.6m/s² (2G), 3min. Period, 1hour each X, Y and Z axis					
12	Impact	196.1m/s² (20G), 11ms Once each X, Y and Z axis					
13	Safety agency approvals	UL1283, CSA C22.2 No.8 (C-UL), DIN EN60939 VDE0565 Teil3-1, ENEC (At only AC input)					
14	Case size (without projection) /Weight	53 X 41 X 92 mm [2.09 X 1.61 X 3.62 inches] (W X H X D) /270g max (Option : -D refer to external view)					

Circuit Diagram

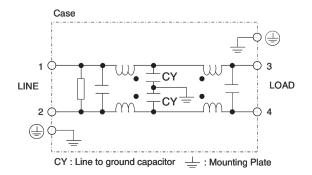

Derating Curve

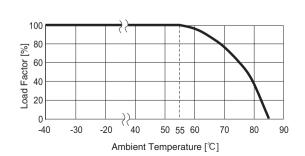


COSEL | NBC,NBM series


External view

As this product is adopted push-down type terminal block, this appearance is as follows.

- (1)The terminal cover is retracted inside the unit.
- 2)The screws for connecting the terminals are held in the up right position.

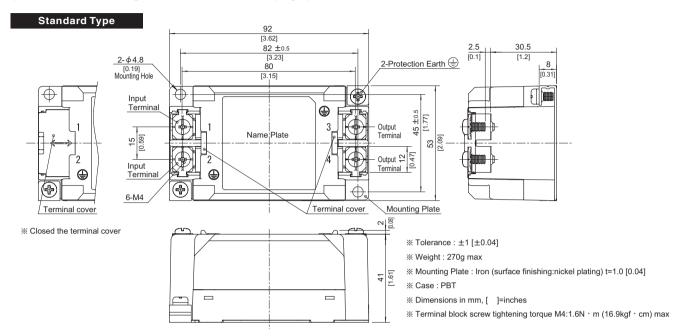

DIN rail installation Type

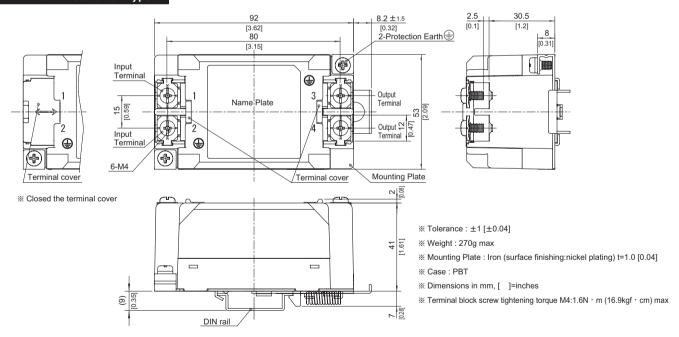

■Note when installing the EMI/EMC Filter on a DIN rail.

When the EMI/EMC Filter is grounded through the DIN rail, the proper noise attenuation may not be achieved.

Be sure to connect the protection earth (PE) of the EMI/EMC Filter body to the earth.

It can connect the ground to either one only.

