

File E61760(N)

59135 High Temperature Flange Mount Features and Benefits



Features

- 2 part magnetically operated proximity sensor
- High temperature rated
- Cross-slotted mounting holes for optimum adjustability
- Standard, high voltage or change over contacts
- Customer defined sensitivity
- Choice of cable length and connector


Benefits

- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium
- Hermetically sealed, magnetically operated contacts continue to operate long after optical and other technologies fail due to contamination
- Simple installation and adjustment

Applications

- Position and limit sensing
- Security system switch
- Linear actuators
- Door switch

DIMENSIONS (in) mm

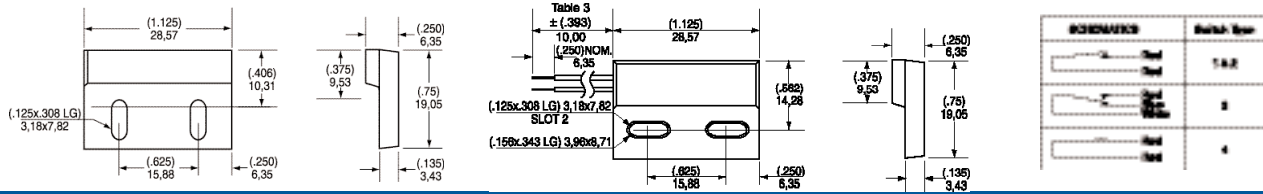

CUSTOMER OPTIONS - Switching Specifications

TABLE 1			Normally Open	Normally Open High Voltage	Change Over	Normally Closed
Contact Type			1	2	3	4
Switch Type	Power	Watt - max.	10	10	5	5
Voltage	Switching	Vdc - max.	200	300	175	175
	Breakdown	Vdc - min.	250	450	200	200
Current	Switching	A - max.	0.5	0.5	0.25	0.25
	Carry	A - max.	1.2	1.5	1.5	1.5
Resistance	Contact, Initial	Ω - max.	0.2	0.2	0.2	0.2
	Insulation	Ω - min.	10 ¹⁰	10 ¹⁰	10 ⁷	10 ⁷
Capacitance	Contact	pF - typ.	0.3	0.2	0.3	0.3
	Temperature	Operating	°C	-40 to +105	-20 to +105	-40 to +105
Time	Storage	°C	-65 to +105	-65 to +105	-65 to +105	-65 to +105
	Operate	ms - max.	1.0	1.0	3.0	3.0
Shock	Release	ms - max.	1.0	1.0	3.0	3.0
	1 ms 1/2 sine	G - max.	100	100	50	50
Vibration		G - max.	30	30	30	30

CUSTOMER OPTIONS - Sensitivity, Cable Length and Termination Specification

TABLE 2								TABLE 3		TABLE 4	
Sensitivity Options:- Activate Distances are approximate using Hamlin 57135 actuator as illustrated. Switch AT before modification.								Cable Type:- 20 AWG 19/32 Teflon ULI1130/UL1332		Termination Options:-	
								Standard Lengths		(2 WIRE VERSIONS ILLUSTRATED)	
SELECT OPTION		S		T		U		SELECT OPTION	CABLE LENGTH (in) mm	A	Tinned leads
Switch Type	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm		B	Crimped terminals
1 Normally Open	12-18	(.748)	17-23	(.709)	22-28	(.630)	27-33	(.591)	01 (3,94) 100	C	6.35mm fastons
2 High Voltage		19,0		18,0		16,0		15,0	02 (11,81) 300	D	AMP MTE 2.54mm pitch
3 Change Over		(.650)		(.591)		(.531)			03 (19,69) 500	E	JST XHP 2.5mm pitch
4 Normally Closed	15-20	16,5	20-25	15,0	25-30	13,5			04 (29,53) 750		
									05 (39,37) 1000		

ORDERING INFORMATION



Series 59135

Switch Type

Sensitivity

Cable Length

Termination

Table 1

Table 2

Table 3

Table 4

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
 Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com
 Hamlin Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 9536666 • Email: sales.de@hamlin.com
 Hamectrol France Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com

DETAILS PROVIDED ON THIS DATA SHEET ARE PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.